STANDARD BAR SPLICER ASSEMBLY

Minimum Lap Lengths							
Bar size to be spliced	Table 1	Table 2	Table 3	Table 4	Table 5		
<i>3, 4</i>	1'-5"	1'-11''	2'-1"	2'-4"	2'-3"		
5	1'-9''	2'-5"	2'-7"	2'-11''	2'-10''		
6	2'-1"	2'-11''	3'-1''	3′-6″	3'-4''		
7	2'-9''	3'-10''	4'-2"	4'-8''	4'-6''		
8	3'-8''	5′-1′′	5′-5″	6'-2"	5′-10′′		
9	4'-7''	6′-5″	6'-10''	7′-9′′	7′-5′′		

Table 1: Black bar, 0.8 Class C

Table 2: Black bar, Top bar lap, 0.8 Class C

Table 3: Epoxy bar, 0.8 Class C

Table 4: Epoxy bar, Top bar lap, 0.8 Class C

Table 5: Epoxy bar, Top bar lap, Class B

Bridge Deck

4'-0"


Threaded

couplers (E)

Threaded splicer bar length = min. lap length + 1^{l_2} " + thread length


* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.


Location	Bar size	No. assemblies required	Table for minimum lap length

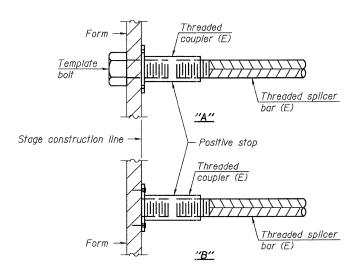

INSTALLATION AND SETTING METHODS

"A": Set bar splicer assembly by means of a template bolt. "B" : Set bar splicer assembly by nailing to wood forms or cementing to steel forms. (E) : Indicates epoxy coating.

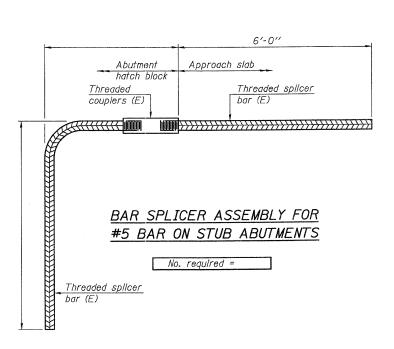



STANDARD MECHANICAL SPLICER

assemblies equired	 Bar size	Location	

<u>NOTES</u>

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars.

Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars. See Section 508 of the Standard Specifications.

See special provision for Mechanical Splicers. See approved list of bar splicer assemblies and mechanical splicers for

alternatives.

BAR SPLICER ASSEMBLY FOR #5 BAR ON INTEGRAL OR SEMI-INTEGRAL ABUTMENTS

No. required = 66

BSD-1

7-1-10

Threaded splicer bar (E)

À	USER	NAME
WILLS BURKE KELSEY ASSOCIATES LTD.		
WBK 116 West Main Street, Suite 201 St. Charles, Illinois 60174	PLOT	SCAL
Emman A	PLOT	DATE

Reinforcement

	USER NAME = nparris	DESIGNED	-	HLF	REVISED	
١.		CHECKED	-	AEU	REVISED	-
	PLOT SCALE =	DRAWN	-	HLF	REVISED	-
	PLOT DATE = 10/18/2011	CHECKED	-	AEU	REVISED	-
-						

Approach Slab

6'-0"

Threaded splicer

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** BAR SPLICER ASSEMBLY AND MECHANICAL SPLICER DETAILS **STRUCTURE NO. 045-3080**

T.R. RTE.			1	COUNTY	TOTAL	SHEI	
0194 08-14117-00-BR		\perp	KANE	76	51		
					CONTRACT	NO. 6	3645
FED. RO	AD DIST. NO.	ILLINOIS	FED.	AID	PROJECT		

SHEET NO. 18 OF 20 SHEETS