




*** REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.

TWO-LANE/TWO-WAY

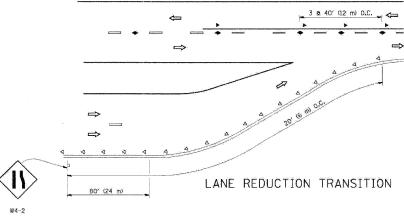


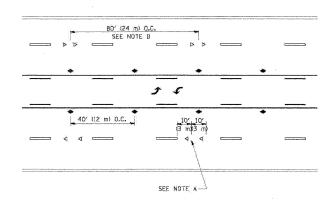

TWO-WAY LEFT TURN

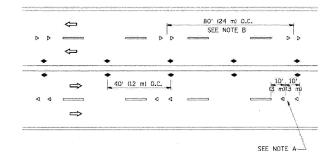

MULTI-LANE/UNDIVIDED

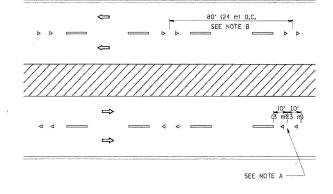

MULTI-LANE/DIVIDED

GENERAL NOTES

- 1. MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- 3. MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES

- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.
- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H. (20 km/h) LOWER THAN POSTED SPEEDS.

SYMBOLS

- ----- YELLOW STRIPE
- ----- WHITE STRIPE
- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (W/O)
- TWO-WAY AMBER MARKER

DESIGN NOTES

- 1, DOUBLE LANE LINE WARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- 2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAWP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
- THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

All dimensions are in inches (millimeters) unless otherwise shown.

NAME DATE T. RAMMACHER 09-19-94 T. RAMMACHER 01-06-06 T. RAMMACHER 01-06-06 C. JUCIUS 09-09-08	REVI	REVISIONS		
T. RAMMACHER 03-12-99 T. RAMMACHER 01-06-00	NAME	DATE		
T. RAMMACHER 01-06-00	T. RAMMACHER	09-19-94		
	T. RAMMACHER	03-12-99		
C. JUCIUS 09-09-09	T. RAMMACHER	01-06-00		
	C. JUCIUS	09-09-09		

ILLINOIS DEPARTMENT OF TRANSPORTATION

TYPICAL APPLICATIONS
RAISED REFLECTIVE PAVEMENT
MARKERS (SNOW-PLOW RESISTANT)

SCALE: NONE

DRAWN BY CADD CHECKED BY

TC-11

* SEE TWO-LANE/TWO-WAY WHERE MARKERS CONTINUE ** SEE TWO-LANE/TWO-WAY WHERE MARKERS CONTINUE ** WHERE THE MEDIAN WIDTH IS 6' (2 m) OR LESS USE TWO-WAY WARKERS.	3 @ 80' (24 m) 0.C.	3 6 40' ((2 m)	MINIMUM OF 3 W EQUALLY SPACED	Ê * 24* 40' (12 m)	m) O.C.
	=	0.C. 40' (12 m) 0.C. 2 00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	40' (12 m) O.C. ** SEE TWO-LANE/TWO-WAY WHEE ** ** WHERE THE MEDIAN WIDTH IS	O.C. ** RE MARKERS CONTINUE	⇒

LEFT TURN