


LONG. SECTION

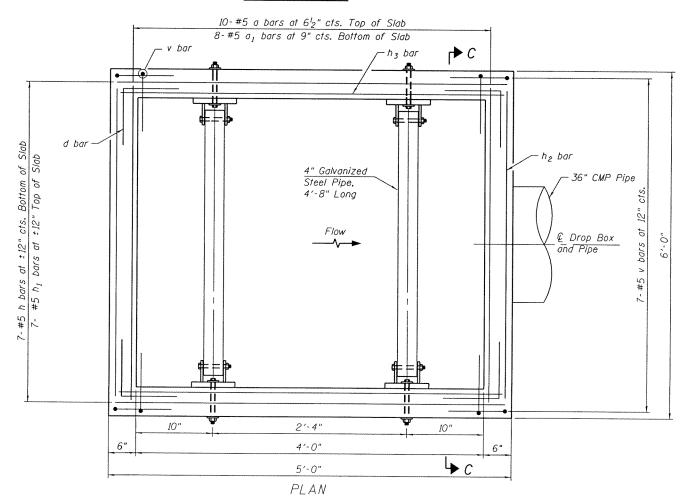

GENERAL NOTES:

- 1. Reinforcement bars shall conform to the requirements of ASTM A 706 Gr 60.
- 2. All exposed concrete edges shall be chamfered 3_4 " unless otherwise noted.
- 3. All construction joints shall be bonded.
- 4. The contract unit price "Each" for Drop Box No. 5 shall include the Concrete Structures, Reinforcement Bars, earth excavation where required, backfilling and necessary grading to fit the structure as shown, or to the slope.
- 5. The contract unit price "Foot" for Traversable Pipe Grate shall include the steel pipe grate system, steel plates, bolts, nuts and washers.
- Steel pipes shall conform to ASTM A-53 (Type E or S) Grade B, Schedule 40 and shall be galvanized conforming to ASTM A-120.
- 7. Steel plates shall conform to AASHTO M-183 and shall be galvanized conforming to AASHTO M-111.
- Bolts, nuts and washer shall be in accordance with Article 1006.08 of the Standard Specifications and shall be galvanized.
- 9. Contractor shall field verify galvanized pipe length.
- 10. The minimum distance form the center of a hole to the free edge of a structural shape or plate shall be 1^{\prime}_{2} " unless noted otherwise.
- Bolts shall be snug tightened by a few impacts of an impact wrench or the full force of a worker using an ordinary spud wrench.
- 12. This work shall be done according to the application portions of 501, 503, 505, 508 and 540 of the Standard Specifications.
- 13. Fabrication of the Steel Pipe Grate System shall conform to the requirements in Section 505 of the Standard Specifications unless noted otherwise.
- 14. Contractor to confirm that a minimum allowable gross bearing pressure equal to 2000 PSF can be achieved prior to construction of Drop Box structure.
- Backfilling and future excavations shall be performed equally on all sides of the structure.

DESIGN STRESSES FIELD UNITS

f'c = 3,500 psi fy = 60,000 psi (Reinforcement)

BILL OF MATERIAL

| ITEM | UNIT | TOTAL |
|------------------------|------|-------|
| Drop Box No. 5 | Each | 1 |
| Traversable Pipe Grate | Foot | 10 |

Drop Box No. 5
Traversable Pipe Grate

<u>PLAN & ELEVATION</u> <u>DROP BOX NO. 5</u> COLONA HEIGHTS STATION 10+61.00 LT

| 1170 SOUTH HOUBOLT ROAD | USB | JOLIET, ILLINOIS 60431 | STRAND | 10FPR NO. 184-001273 | PLC | SCILATES | 10FPR NO. 184-001273 | PLC | STRAND | STRAND | 10FPR NO. 184-001273 | PLC |

AD USER NAME Johnkp DESIGNED - MJD REVISED

CHECKED - RRD REVISED

PLOT SCALE DRAWN - BJF REVISED

PLOT DATE 2/4/2014 CHECKED - RRD REVISED

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PLAN AND ELEVATION DROP BOX NO. 5 F.A.U SECTION COUNTY TOTAL SHEETS NO.

5789 2R-1 HENRY 235 5-7

CONTRACT NO.64713

SHEET NO. S9 OF S10 SHEETS