

STORM SEWER PLUG

NOTES:


- THIS WORK CONSISTS OF FURNISHING AND PLACING BRICKS AND MORTAR AS SHOWN AND AS DIRECTED BY THE ENGINEER AT LOCATIONS SHOWN IN THE PLANS TO PLUG STORM SEWERS.
- 2. THIS WORK SHALL BE CONSIDERED AS INCLUDED IN THE CONTRACT UNIT PRICE BID FOR THE STORM SEWER ITEMS.

STA.		TO STA.		
90/94	2004-075RS	COOK	65	42
F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.


62814

CATCH BASIN, TYPE C, 2' DIAMETER, TYPE 1 FRAME, OPEN LID (CITY OF CHICAGO)

ALTERNATE MATERIALS FOR WALLS	T (MIN)
PRECAST REINFORCED CONCRETE SECTION	75 (3)
CONCRETE MASONRY UNIT	125 (5)
CAST-IN-PLACE CONCRETE	150 (6)
BRICK MASONRY	200 (8)

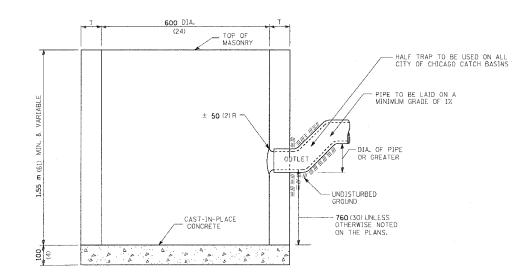

ELEVATION

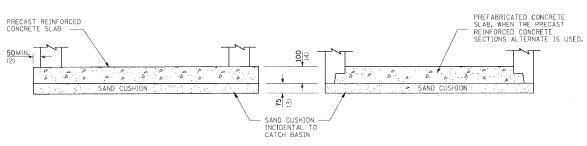

ALTERNATE BOTTOM SLAB

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

REVISIONS DATE				TRANSPORTATION AN EXPRESSWAY)
			O 57th ST (WE DRAINAGE DE ATCH BASIN.	
			ICAGO) R PLUG	
		SCALE: NONE DATE: OCTOBER 2	29, 2004	DRAWN BY: JB CHECKED BY: EEY

CONSOER TOWNSEND ENVIRODING ENGINEERS, INC.
303 EAST WACKER DRIVE, SUITE 600
CHCADO ILLAMOIS 60607-522, PHONE, (312) 938-0300