SIGN DETAIL

1:75

EB-TR-62
STA. 600+00

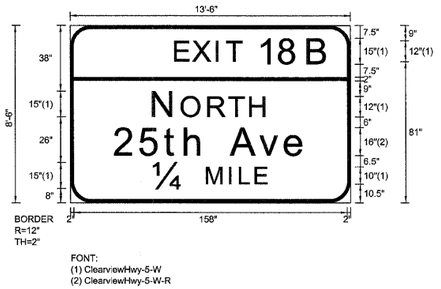

SIGN NUMBER	name
WIDTH x HGHT.	13'-6" x 8'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																						LENGTH	SERIES-SIZE
E	X	I	T	1	8	B																																			ClearviewHwy-5-W
61.1	71.3	85	90.9	109.6	121.7	138																																		88.3	12,15
N	O	R	T	H																																					ClearviewHwy-5-W
48.4	64.8	80.3	92.2	104.4																																				65.1	15,12
2	5	t	h		A	v	e																																		ClearviewHwy-5-W-R
25.8	40.8	54.8	66.6	77.7	93.2	109.7	124.4																																	110.4	1613
¼	M	I	L	E																																					ClearviewHwy-5-W
48.3	79.3	92.4	98.3	107.4																																				65.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 13 OF 77 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	341
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		