SIGN DETAIL
1:75

EB-CL-69
STA. 636+00

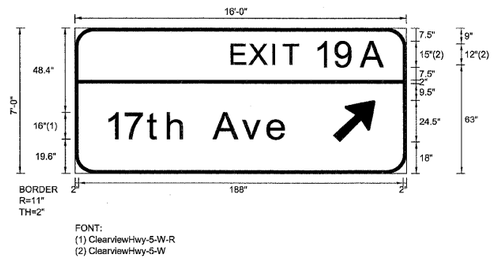

SIGN NUMBER	name	
WIDTH x HGHT.	16'-0" x 7'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	11"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT
ARMED	45	149.5	18	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																						LENGTH	SERIES/SIZE
E	X	I	T	1	9	A																																	ClearviewHwy-5-W
91.3	101.6	115.2	121.1	139.8	151.8	166.4																																89.1	12,15
1	7	t	h		A	v	e																																ClearviewHwy-5-W-R
18	29	42.3	54.2	65.2	80.7	97.3	112																															105.7	16/13

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 17 OF 77 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	345
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		