


NOTES: 1. USE 16 GAUGE STEEL FOR CABINET.

- 2. THE TOP SHELF SHALL SLIDE IN OR OUT WITH THE TOP DOOR OPEN.
- 3. ALL HINGES AND HASPS WILL BE WELDED TO THE CABINET.
- 4. ALL EDGES SHALL BE GROUND SMOOTH.
- 5. TWO (2" DIA.) ACCESS HOLES WILL BE REQUIRED FOR EACH SHELF.
- 6. CABINET SHALL BE PAINTED WITH TWO COATS OF FLAT PAINT.
- 7. 2 EACH MATCHING KEY PADLOCKS, WITH 3 KEYS PROVIDED, MASTER MODEL 3 T OR EQUIVALENT.
- 8. 4 EACH PLAIN STEEL, NON-REMOVABLE PIN, NO HOLE 4"X4" SQUARE CORNER HINGES TO BE WELDED ON.
- 9. 2 EACH EXTRA HEAVY, PLAIN STEEL, FIXED STAPLE, NO HOLE, 7 1/4 " HASPS TO BE WELDED ON.


FLAT STOCK DIMENSIONS VARY DEPENDING ON TYPE OF ROLLER ASSEMBLY.


LOCKABLE COMPUTER CABINET

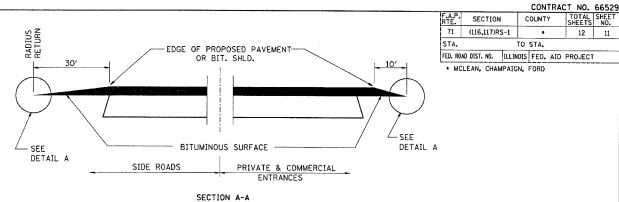


TOTAL SHEET NO.

DETAILS AT ENTRANCES & SIDE ROADS



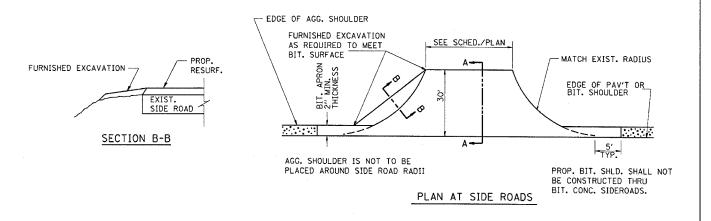



PLAN AT PRIVATE & COMMERCIAL ENTRANCES (DO NOT RESURFACE FIELD ENTRANCES)

DINCHT OF TOA	THE THOSE DEBA	F TRANSPORTATION
RIMENI OF IRA	ILLINOIS DEPA	F TRANSPURTATION
	_	
DETAILS		
LIAILU) DEIAI	
	CON F VERT.	
1	SCALE: HORIZ.	DRAWN BY
t	DATE	CHECKED BY

REAR OF CABINET

2" ACCESS HOLES IN

DATE = 11/3/2004
NAME = #FILEL*
SCALE = #SCALE*
RENCE = #REF*