SIGN DETAIL
1:75

EB-BM-74
STA. 672+30

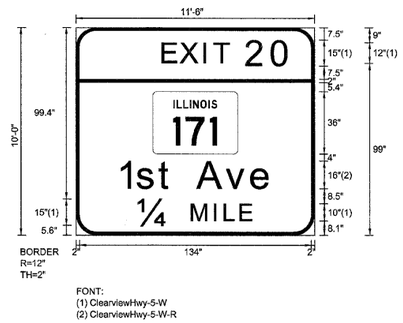

SIGN NUMBER	name	
WIDTH x HGHT.	11'-6" x 10'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT
M1-1100A-3-22-10D	0	37.9	48.2	49.1	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																					LENGTH	SERIES/SIZE
E	X	I	T	2	0																																	ClearviewHwy-5-W
44.5	54.8	68.5	74.4	93	108.2																															75.9	12,15
1	s	t		A	v	e																																ClearviewHwy-5-W-R
18	29	41.8	49.6	64	80.5	95.2																														89	16/13
¼	M	I	L	E																																	ClearviewHwy-5-W
29.8	60.8	73.9	79.8	88.9																																65.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 21 OF 77 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	349
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		