SIGN DETAIL

1:75

WB-TR-81
STA. 624+50

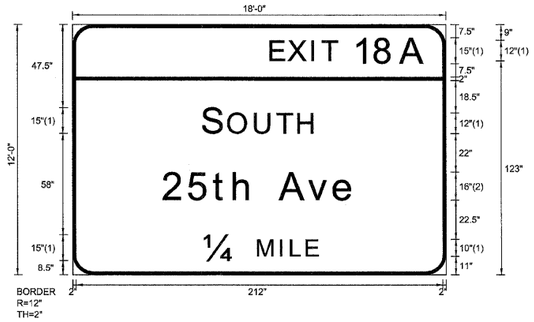

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name
WIDTH x HGHT.	18'-0" x 12'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

									LENGTH	SERIES-SIZE
E	X	I	T	1	8	A				ClearviewHwy-5-W
115.1	125.3	139	144.9	163.6	175.7	190.4			89.3	12,15
S	O	U	T	H						ClearviewHwy-5-W
75.8	90.5	105.9	118.8	131					64.4	15,12
2	5	t	h		A	v	e			ClearviewHwy-5-W-R
52.8	67.8	81.8	93.6	104.7	120.2	136.7	151.4		110.4	16,13
¼	M	I	L	E						ClearviewHwy-5-W
76.5	107.5	120.6	126.5	135.6					65.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 53 OF 77 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	381
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		