SIGN DETAIL

1:75

WB-GM-83
STA. 646+20

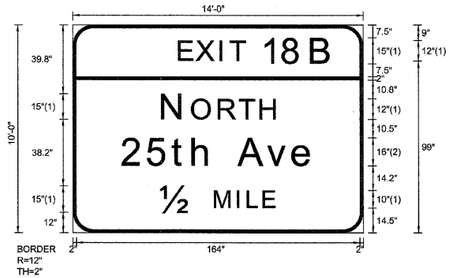

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name
WIDTH x HGHT.	14'-0" x 10'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)								LENGTH	SERIES-SIZE
E	X	I	T	1	8	B			ClearviewHwy-5-W
61.7	72	85.6	91.5	110.2	122.3	138.6		88.3	12,15
N	O	R	T	H					ClearviewHwy-5-W
52.3	69.5	84.9	96.8	109				65.9	15,12
2	5	t	h		A	v	e		ClearviewHwy-5-W-R
28.8	43.8	57.8	69.6	80.7	96.2	112.7	127.4	110.4	1613
12	M	I	L	E					ClearviewHwy-5-W
51.1	82.4	95.6	101.5	110.5				65.8	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 55 OF 77 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	383
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		