SIGN DETAIL

1:75

WB-BM-86
STA. 673+00

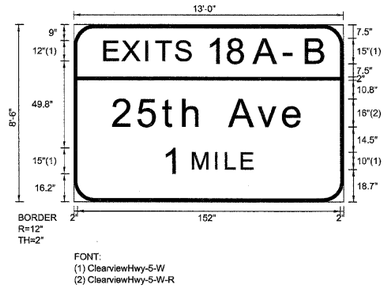

SIGN NUMBER	name
WIDTH x HGHT.	13'-0" x 8'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)											LENGTH	SERIES-SIZE
E	X	I	T	S	1	8	A	–	B			ClearviewHwy-5-W
18.1	28.4	42.1	48	59.3	77.9	90	104.7	123.1	134.9		128.2	12,15
2	5	t	h		A	v	e					ClearviewHwy-5-W-R
22.8	37.8	51.8	63.6	74.7	90.2	106.7	121.4				110.4	16/13
1	M	I	L	E								ClearviewHwy-5-W
52.4	69.2	82.3	88.2	97.3							51.2	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILE$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 58 OF 77 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	386
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		