SIGN DETAIL
1:75

WB-BM-89
STA. 686+40

SIGN NUMBER	name
WIDTH x HGHT.	15'-0" x 7'-0"
BORDER WIDTH	2"
CORNER RADIUS	11"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

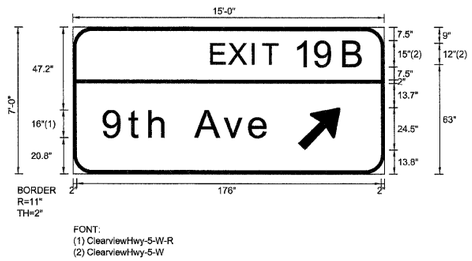

SYMBOL	ROT	X	Y	WID	HT
ARMED	45	130	13.8	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

							LENGTH	SERIES-SIZE
E	X	I	T	1	9	B		ClearviewHwy-5-W
80.3	90.6	104.2	110.2	128.8	140.8	157.1	88.1	12,15
9	t	h		A	v	e		ClearviewHwy-5-W-R
18	32.6	44.5	55.5	71	87.6	102.3	96	16/13

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 59 OF 77 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	387
		CONTRACT NO. 60G52		

FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT