SIGN DETAIL
1:75

WB-BM-96
STA. 780+60

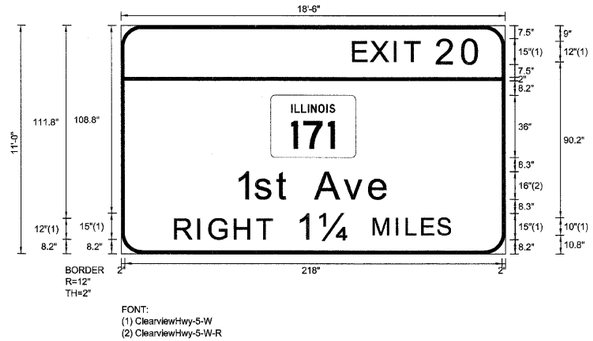

SIGN NUMBER	name	
WIDTH x HGHT.	18'-6" x 11'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT
M1-1100A-2-22-10D	0	80.4	74.7	49.1	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																						LENGTH	SERIES/SIZE
E	X	I	T	2	0																																		ClearviewHwy-5-W
122.5	131.1	142.5	147.4	164.6	179.8																																	69.5	10,15
1	s	t		A	v	e																																	ClearviewHwy-5-W-R
60.5	71.5	84.3	92.1	106.5	123	137.8																																89	1613
R	I	G	H	T	1	¼	M	I	L	E	S																												ClearviewHwy-5-W
25.6	38.7	45.4	60	72.8	96.4	109.1	140.1	153.3	159.2	168.2	177.2																											158.8	12,15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 65 OF 77 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	393
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		