
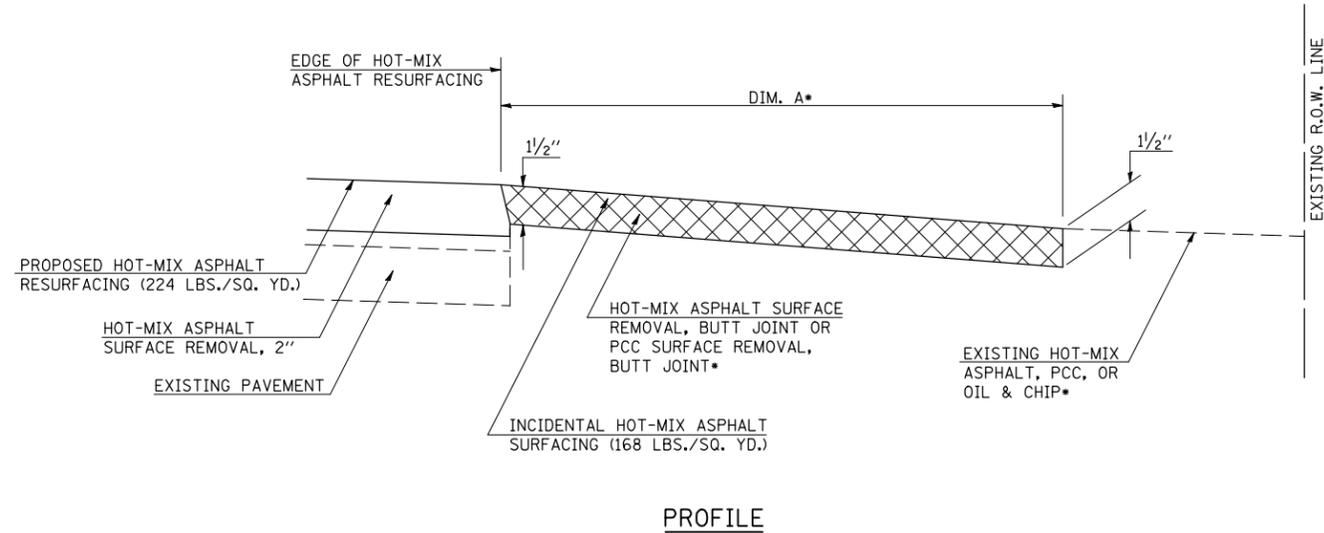


TYPICAL DETAIL OF SIDEROAD RETURNS
LT. STA. 320 + 09.70 TO LT. STA. 344 + 60.90
RT. STA. 320 + 09.70 TO RT. STA. 345 + 45.00

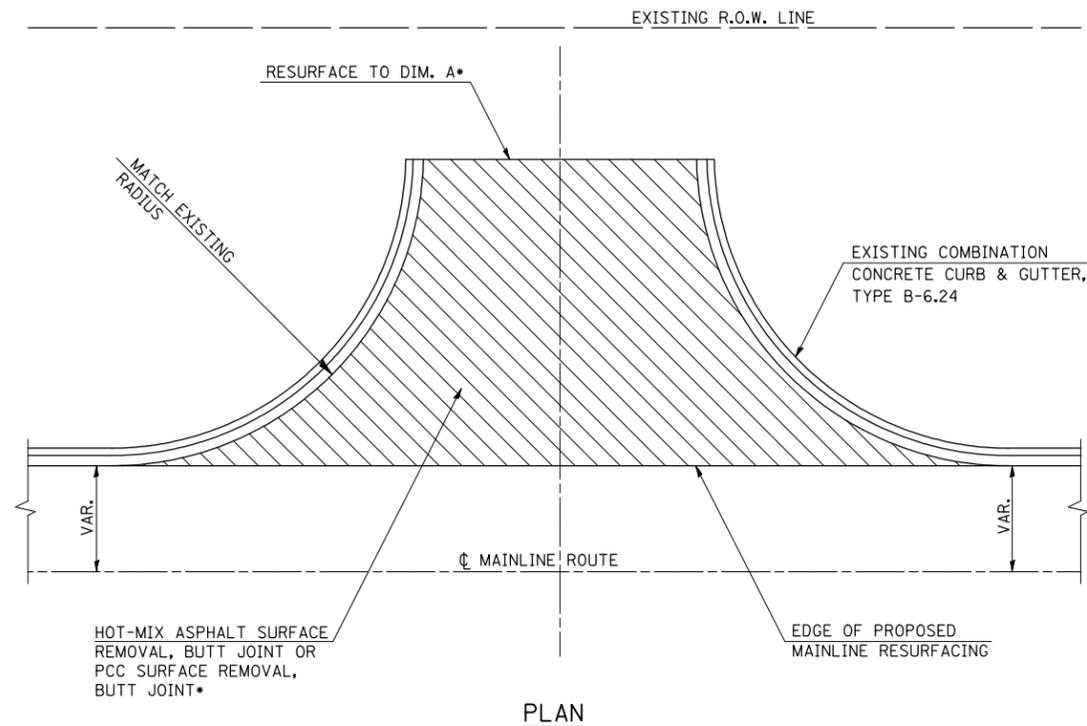

GENERAL NOTES

1. THE EXISTING SURFACE SHALL BE PREPARED IN ACCORDANCE WITH SECTION 408 OF THE STANDARD SPECIFICATIONS.
2. THE INCIDENTAL HOT-MIX ASPHALT SURFACING IS INTENDED TO RESURFACE THE EXISTING SIDEROADS IN THEIR ENTIRETY. THE EXISTING SIDEROADS SHOULD BE RESURFACED TO MAINTAIN THEIR CURRENT RADII AND SHALL BE RESURFACED TO THE DIM. A SHOWN ON THE THE CHART ON THE RIGHT SIDE OF THIS PAGE.

*SEE CHART ON RIGHT SIDE OF PAGE FOR A LIST OF SIDEROADS COVERED BY THIS DETAIL, DIMENSIONS AND TYPES OF BUTT JOINTS.

SIDEROAD NAME	STATION	LT OR RT	DIMA*	TYPE OF MILLING
FAIR ST.	328+57.32	LT	26.0 FEET	HMA
WESTLAWN AVE.	331+66.19	RT	28.0 FEET	HMA
ROYAL CT.	332+18.45	LT	29.0 FEET	HMA
DRAPER AVE.	334+66.96	LT	28.0 FEET	HMA
DRAPER AVE.	334+69.10	RT	29.0 FEET	HMA
GARFIELD AVE.	337+76.89	LT	26.0 FEET	PCC
GARFIELD AVE.	338+81.08	RT	29.0 FEET	HMA
KELLY CT.	340+30.10	LT	28.0 FEET	HMA
RUSSELL ST.	342+92.64	LT	28.0 FEET	PCC
RUSSELL ST.	342+94.47	RT	17.0 FEET	HMA

FILE NAME =	USER NAME = hoganbj	DESIGNED - BJH	REVISED -
ct:\pw\work\PWIDOT\HOGANBJ\d0142445\0570782-sht-details.dgn		DRAWN - 9/29/2009	REVISED -
	PLOT SCALE = 40.0000' / IN.	CHECKED -	REVISED -
	PLOT DATE = 10/19/2009	DATE -	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

SIDEROAD RESURFACING DETAILS

SCALE: _____ SHEET NO. ___ OF ___ SHEETS STA. _____ TO STA. _____

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
725	(32R,Z)RS-4	CHAMPAIGN	35	25
			CONTRACT NO. 70782	
ILLINOIS FED. AID PROJECT				