


P:\P-05\1719\DGN\Sheets\Iowa Interstate 3R Final Plans\081024-64815-045-Abut-B-Widen.dgn
11:37:42 AM
18/08/25/2012

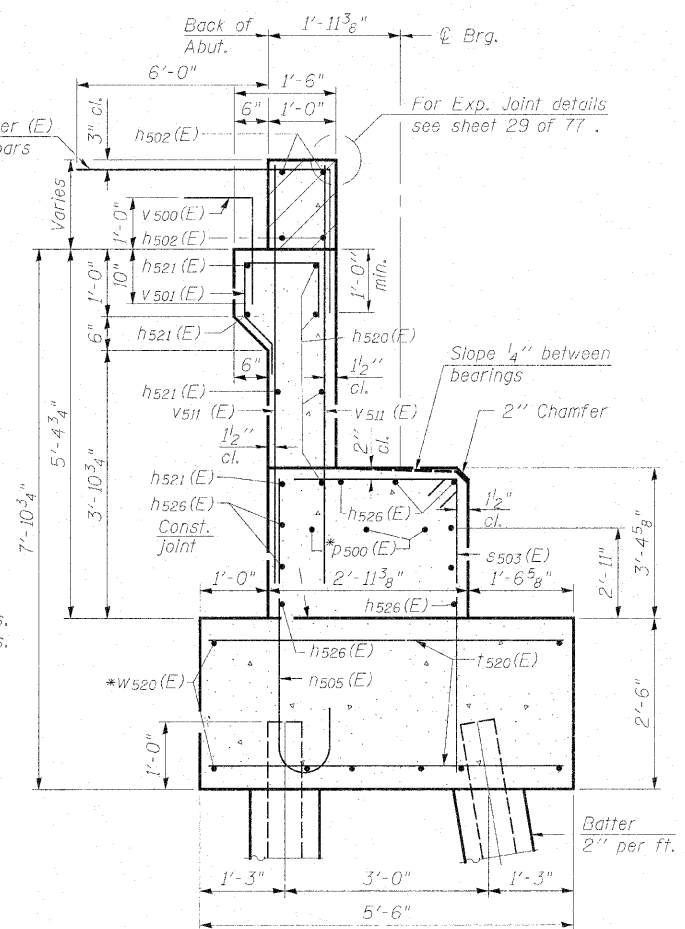

* Epoxy grout h500(E), h527(E), h528(E), n508(E), n509(E), p500(E), s503(E), v503(E), and w520(E) bars in 9" (min.) drilled holes. See Section 584 of the Standard Specifications. Cost of hole drilling and epoxy grouting are included with "Reinforcement Bars, Epoxy Coated".

Notes:

Hatched area to be poured after superstructure false work has been removed. Quantity of concrete included with Concrete Superstructure.

Space reinforcement in cap to miss anchor bolts.


For Concrete Encasement details, see sheet 70 of 77.

Reinforcement bars that are to be grouted into existing concrete shall be spaced at least 6" (unless noted) from the edge of existing concrete and shall be embedded into the existing concrete a minimum of 9".

Contractor shall avoid drilling into existing reinforcement.

See Sheet 46 of 77 for Footing Plan, North Wing Wall, and Sections B-B, C-C, D-D & E-E.

See Sheet 47 of 77 for South Wing Wall and Bill of Material.



B.F. = Back Face
E.F. = Each Face
F.F. = Front Face

33 West Monroe | Suite 1540 | Chicago, IL 60603
P 312.425.9560 | F 312.425.9564 | www.infrastructure-eng.com

SHEET NO.45	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	280	81-1(VB-1)R	ROCK ISLAND	503	381
	77 SHEETS			CONTRACT NO. 64815	
FED. ROAD DIST. NO. - ILLINOIS FED. AID PROJECT					