


*Elevations taken at Back of Abutment.

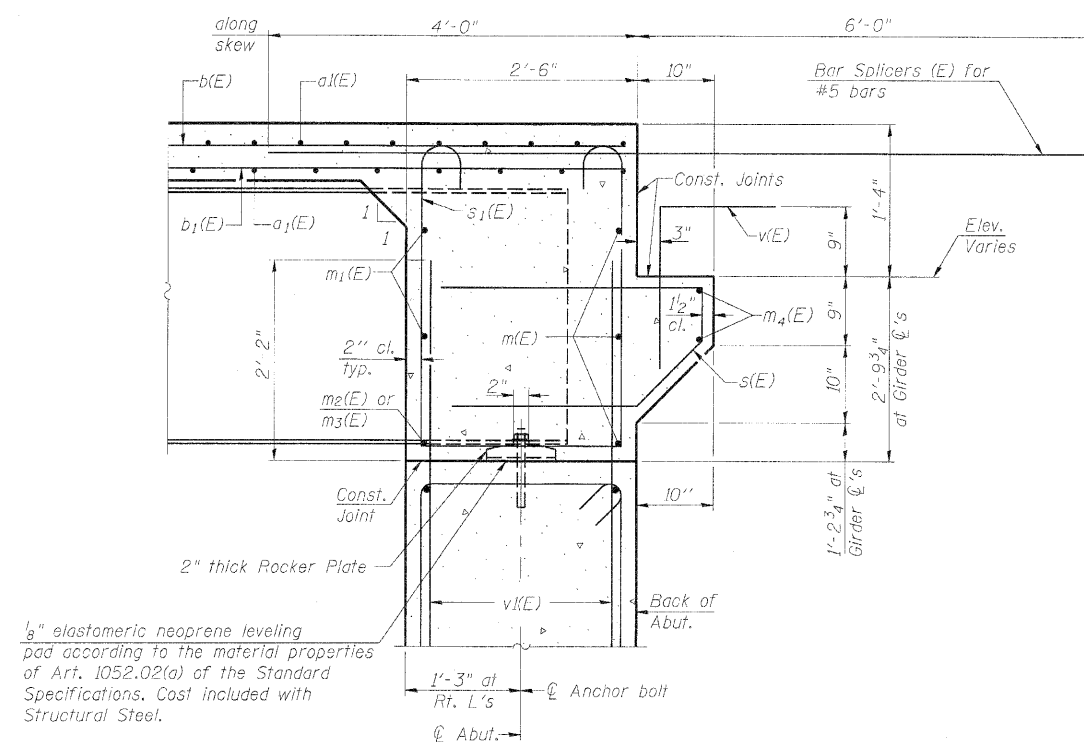

Notes:

Reinforcement bars in diaphragm are billed with superstructure on sheet 15 of 40.

Concrete in diaphragm is included with Concrete Superstructure on sheet 15 of 40.

For details of bars $s(E)$ & $s_1(E)$ see sheet 15 of 40.

The $s(E)$ and $s_1(E)$ bars shall be placed parallel to the beams. Spacing for these bars shall be at right angles to the beams.

MIN. BAR LAP

#6 bar = 3'-4"

Dimensions at right angles to abutment, except as shown.

PROFESSIONAL DESIGN FIRM LICENSE #184-001084

© Copyright Hanson Professional Services Inc. 2010



Hanson Professional Services Inc.

JOB NO. 05045304

05R1532A

DATE: 05/21/10

SHEET NO. 14

40 SHEETS

F.A. RTE.

RULE
ABC

SECTION

81-1(B-1)R

COUNTY

Rock Island

TOTAL	100
-------	-----

503

SHEET

427

CONTRACT NO. 64815

ILLINOIS	FED. AID PROJECT
----------	------------------