


*Elevations taken at Back of Abutment.

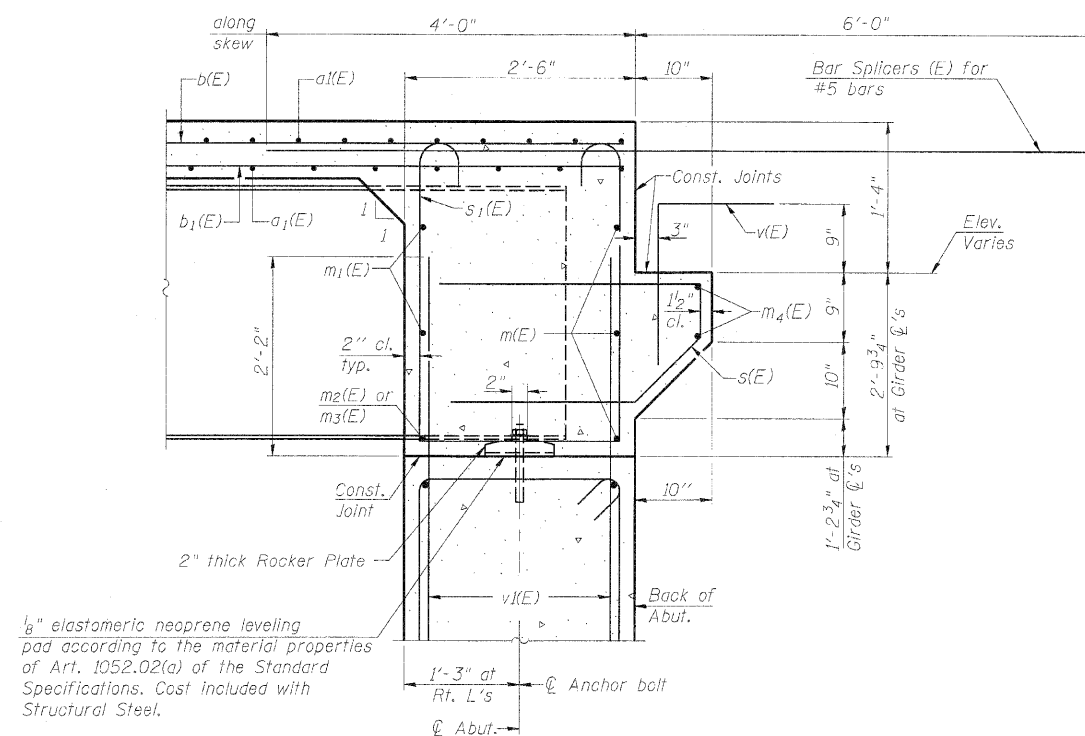

Notes:

Reinforcement bars in diaphragm are billed with superstructure on sheet 18 of 40.

Concrete in diaphragm is included with Concrete Superstructure on sheet 18 of 40.

For details of bars $s(E)$ & $s_1(E)$ see sheet 18 of 40.

The $s(E)$ and $s_1(E)$ bars shall be placed parallel to the beams. Spacing for these bars shall be at right angles to the beams.

MIN. BAR LAP
#6 bar = 3'-4"

Dimensions at right angles to abutment, except as shown.

PROFESSIONAL DESIGN FIRM LICENSE #184-001084



HANSON
Hanson Professional Services Inc.

40 SHEETS

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
280	81-11B-11R	Rock Island	503	430
CONTRACT NO. 64815				
ILLINOIS FED. AID PROJECT				