
STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

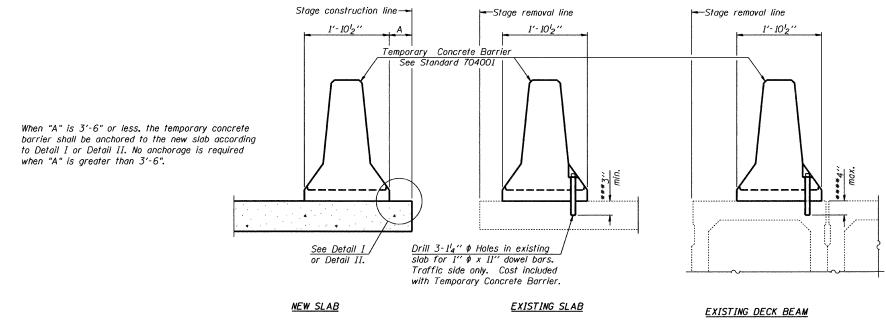

NOTES


Detail I - With Bar Splicer or Couplers: Connect one (1) 1"x7"x10" steel ₱ to the top layer of couplers with 2-58" \$\phi\$ bolts screwed to coupler at approximate & of each barrier panel.


Detail II - With Extended Reinforcement Bars: Connect one (1) 1"x7"x 10" steel 12 to the concrete slab or concrete wearing surface with 2-58" \$\phi\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate & of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The I" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

SECTIONS THRU SLAB OR DECK BEAM


- *** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- **** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

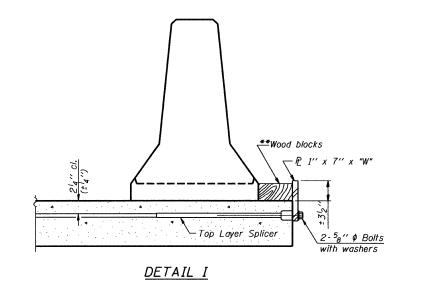

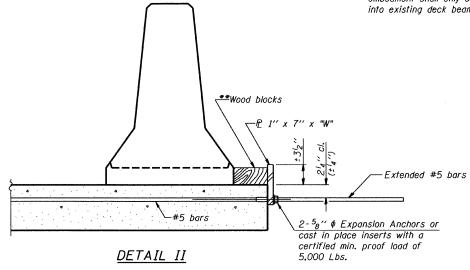

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"



STEEL RETAINER P 1" x 7" x 10"

* Required only with Detail II

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION Illinois Rte. 84 Over Apple River Tributary STATION 165+50.00 STRUCTURE NO. 043-0078

TOTAL SHEET SHEETS NO.

	_						
SHEET NO. SA4 OF 25 SHEETS	F.A.P. RTE.	.A.P. SECT			COUNTY	TOTAL SHEETS	SHEE NO.
	308	104BR-1		JO DAVIESS	126	40	
					CONTRACT	NO. 64	1B26
	10-15-2010 ILLINOIS FED.			FED. Al	ID PROJECT		

GRaEF 8501 W. Higgins Road; Suite 280 Chicago, Illinois 60631 (773) 399-0112

DESIGNED J.Z.CHECKED E.E.J. R.B.H. DRAWN

R-27

11-1-09