



VETERANS PARKWAY AND MORRIS AVENUE (NORTHBOUND)

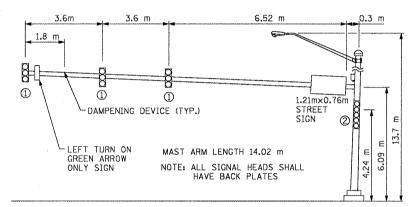


VETERANS PARKWAY AND MORRIS AVENUE (EASTBOUND)

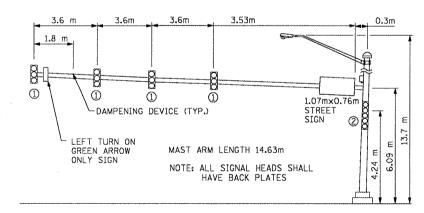


VETERANS PARKWAY AND GREENWOOD AVENUE (NORTHBOUND)

	VETERANS PARWAY	// MAST_ARM LENGTH	FOUNDATION DIAMETER	FOUNDATION DEPTH	MIN. DEPTH INTO BED ROCK	
-	N.E.	12.19m	750mm	4.6m	0.0	
	N.W.	15.24m	750mm	5.2m	0.0	
	S.E.	14.02m	750mm	4.6m	0.0	
	S.W.	15.24m	750mm	5.2m	0.0	
	VETERANS PARWAY/ GREENWOOD					
	N.E.	14.63m	750mm	4.6m	0.0	
-	N.W.	14.63m	750mm	4.6m	0.0	
6	S.E.	8.53m	750mm	4.6m	0.0	
# 1.ME	SIX POINTS ROAD MORRIS	/				
/14/2010	N.E.	13.41m	750mm	4,6m	0.0	
	N.W.	11.58m	750mm	4.6m	0.0	
4	S.E.	6.09m	750mm	4.6m	0.0	
Ż۱	S.W.	12.8m	750mm	4.6m	0.0	

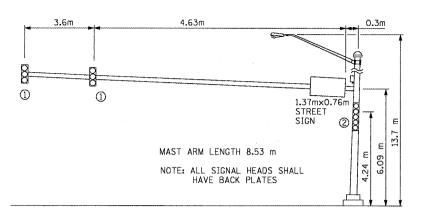

VETERANS PARKWAY AND GREENWOOD AVENUE (EASTBOUND)



= 2.08 SQ M



20mm BORDER 200mm D SERIES LETTERS 2 SIGNS REQUIRED= 0.81 SO M EACH = 1.62 SO M





20mm BORDER 200mm D SERIES LETTERS 2 SIGNS REQUIRED= 1.04 SQ M EACH = 2.08 SQ M

NOTE: REFER TO I.D.O.T. STANDARD 720016




20mm BORDER 200mm D SERIES LETTERS 2 SIGNS REQUIRED= 0.91 SO M EACH = 1.81 SQ M



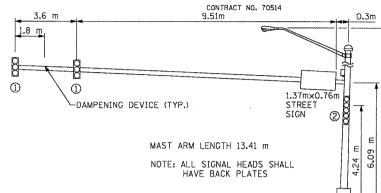

SIX POINTS ROAD MORRIS AVENUE (NORTHBOUND)

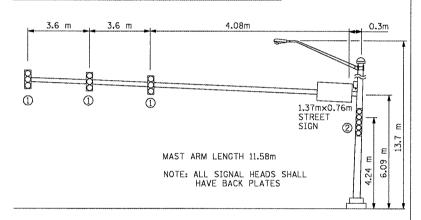

SIX POINTS ROAD MORRIS AVENUE (WESTBOUND)

TS-17

REVISIONS
NAME DATE

VETERANS PARKWAY & MORRIS AVENUE

VETERANS PARKWAY & GREENWOOD AVENUE

SIX POINTS ROAD & MORRIS AVENUE

MAST ARM DETAILS

SCALE: NONE

DRAWN BY: RV
DESIGNED BY: AS
DATE: MARCH, 2009

CHECKED BY: MSA

LEFT TURN ON GREEN ARROW ONLY

R10-5L (0.6mX0.7m) 8 SIGNS REQUIRED - 0.45 SQ.M EACH - 0.45 SQ.M EACH

TYPE A SHEETING REQUIRED
THIS SIGN SHALL BR LOCATEDO.15m TO
0.3M TO THE RIGHT OF EACH 3 SECTION
MAST ARM MOUNTED LEFT TURN SIGNAL.
PLUS ADJACENT TO EACH POST MOUNTED
3-SECTION LEFT TURN LANE

AMES Engineering, Inc.
Consulting Engineers
1341 Warren Avenue
Downers Grove, IL 60515

BFILE\$