



STEEL PILE TABLE

Designation	Depth d	Flange width bf	Web and Flange thickness t	Encasement diameter A
HP 14x117	14½"	14 ⁷ / ₈ "	13/ ₁₆ "	30"
x102	14"	14¾"	11/16"	30"
x89	137/8"	14¾"	5/8"	30"
x73	135/8"	145/8"	1/2"	30"
HP 12x84	12½"	12½"	11/ ₁₆ "	24"
x74	12½"	12½"	5/8"	24"
x63	12"	12½"	1/2"	24"
x53	11¾"	12"	7/ ₁₆ "	24"
HP 10x57	10"	101/4"	%16"	24"
x42	9¾"	101/8"	⁷ / ₁₆ "	24"
HP 8x36	8"	8½"	7/ ₁₆ "	18"

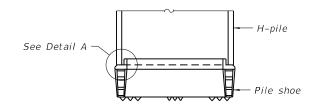


ELEVATION

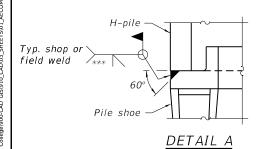


SHOE ATTACHMENT


Note:

The steel H-piles shall be according to AASHTO M270 Grade 50.

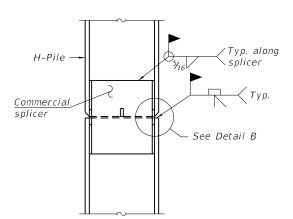

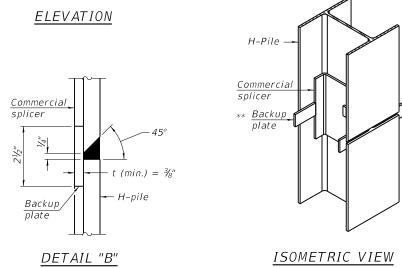


WELDED COMMERCIAL SPLICE

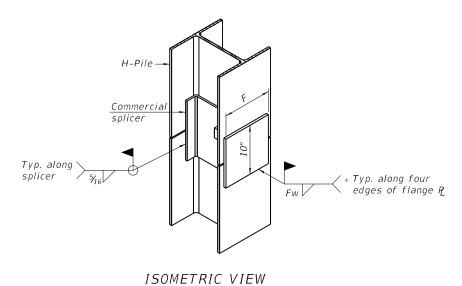

WELDED COMMERCIAL SPLICE ALTERNATE


- ** Remove portions of backup plates that extend outside the flanges.
- *** Weld size per pile shoe manufacturer ($\frac{5}{16}$ " min.).




* $4 - \frac{3}{4}$ " \bigcirc x 4" Granular or solid flux filled headed studs automatically end welded (Typ. each flange, each pile)

* Typical each flange, each pile. Cost included with Furnishing Piles.


SEISMIC PIER PILE DETAIL

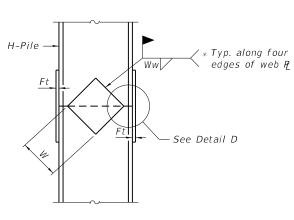

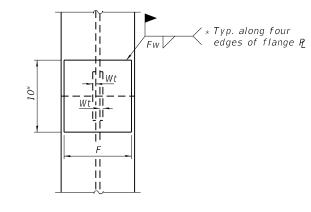

ELEVATION

END VIEW



Designation	F	Ft	Fw	W	Wt	Ww
HP 14x117	12½"	1"	7/8"	7¾"	<i>5</i> ⁄8″	1/2"
x102	12½"	7/8"	3/4"	73/4"	5/8"	1/2"
x89	12½"	3/4"	¹ 1/ ₁₆ "	73/4"	5/8"	1/2"
x73	12½"	5/8"	%16"	73/4"	5/8"	1/2"
HP 12x84	10"	7/8"	11/16"	6½"	5/8"	1/2"
x74	10"	7/8"	¹ ½ ₁₆ "	6½"	5/8"	1/2"
x63	10"	5/8"	1/2"	6½"	1/2"	3/8"
x53	10"	5/8"	1/2"	6½"	1/2"	3/8"
HP 10x57	8"	3/4"	%16"	5½"	1/2"	3/8"
x42	8"	5/8"	%16"	5½"	1/2"	3/8"
HP 8x36	7"	5/8"	7/16"	41/4"	1/2"	3/8"

WELDED PLATE FIELD SPLICE

F-HP

1-1-2020

AECOM PL

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

HP PILE DETAILS
STRUCTURE NO. 058-9202
SHEET NO. SF-31 OF SF-35 SHEETS


STANDARD BAR SPLICER ASSEMBLY PLAN

(All components shall be provided from one supplier)

Threaded splicer bar length = min. lap length + $1\frac{1}{2}$ " + thread length

* Epoxy not required on Bar Splicer Assembly components used in conjunction with black bars.


Location	Bar size	No. assemblies required	Minimum lap length

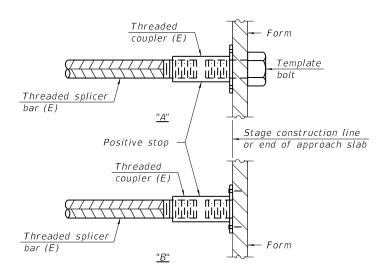

INSTALLATION AND SETTING METHODS

"A" : Set bar splicer assembly by means of a template bolt "B" : Set bar splicer assembly by nailing to wood forms or

cementing to steel forms. (E): Indicates epoxy coating.

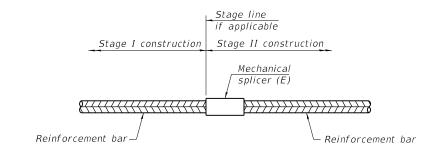

STANDARD MECHANICAL SPLICER

Location	Bar	No. assemblies
LUCALIUII	size	required
S. Abut.	#11	11
N. Abut.	#11	11
Pier Cap	#5	10
Pier Cap	#10	16
Pier Crashwall	#6	64

Notes:

Splicer bars shall be deformed with threaded ends and have a minimum 60 ksi yield strength.

All reinforcement shall be lapped and tied to the splicer bars. Bar splicer assemblies shall be epoxy coated according to the requirements

for reinforcement bars. See Section 508 of the Standard Specifications. See approved list of bar splicer assemblies and mechanical splicers for alternatives.

BSD-1

1-1-2020

AECOM

USER NAME = monica.crinion	DESIGNED - MCC	REVISED -
	CHECKED - ATB	REVISED -
PLOT SCALE = N.T.S.	DRAWN - MCC	REVISED -
PLOT DATE = 4/29/2021	CHECKED - ATB	REVISED -

2900 N. Martin Luther King Jr. Dr. Decatur, IL 6252									-		
ROUTE DESCRIPTIO	N BF	RUS	H COL	LEGE R	OAD	LOGGED	BY	CM			
SECTION		LO	CATIO	N DEC	CATU	R, IL					
COUNTY MACON	_ ST	RU	CTUR	E NO.		(Exist)	(Pro	op.)			
BORING NO. B-15	_ DF	ILL	ING N	IETHO	D HO	DLLOW STEM HAMMER TYF	PE 1	140# :	SAFET	Y HAM	ME
Station By URS Offset By URS Ground Surface Elev. 673.881 (ft.)	E	P T	B L O W	U G S	M 0 1 5	Surface Water Elev.	E L E V	D E P T	B L O W	U C S	
						After Hrs (ft.)					
SOIL DESCRIPTION 12" CONCRETE on	CRIPTION BRUSH COLLEGE ROAD LOGGED BY CM LOCATION DECATUR, IL LOCATION DECATUR, IL LOCATION DECATUR, IL COLOR CRIPTION										
SILTY CLAY - A-6 Gray-Mottled-Brown, moist, stiff, low plasticity	DRILL E E P T H N (ft.) (ft.) Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stiticity 5 Stitic	7 8		26.4	Gray, moist, hard, low plasticity, little sand,					10	
oray-worked-brown, moist, still, low plasticity		5	6		22.9			40			
SANDY LOAM - A-2-6 Dark Brown, moist, very loose, fine-coarse,	1		2		17.0				38 22-3		1
little sand, trace gravet		10		1.9	13.9			45			
Brown, moist, stiff, low plasticity, little sand -very stiff	_		8	3.2	13.2	-		45	32	8.0	11
-		15		3.7	12.5						
						_		50	32		_
SILTY CLAY LOAM - A-6 Gray, moist, very stiff, low plasticity, little			11	3.2	12.5						
sand, trace gravel 	- -	20	22								
Brown, saturated, dense, fine-medium (*)free water @ 19.5'			12 6			-dense _	-	55	20		_
SANDY LOAM - A-2-6 Brown, wet, very dense, fine-coarse, trace gravel		25	29								
SAND - A-1-a Gray, wet, very dense, fine-coarse		1	32 30			-medium dense	+	60	8		
CLAY - A-6 Gray, moist, hard, low plasticity, little sand,			35 25-3		10.4				12		
trace gravel SANDY LOAM - A-2-6 Gray, moist, very dense, fine-coarse, with	3	50	34 60-2			_		65			
gravel							-				
	3	5	5				H	-			

2900 N. Martin Luther King Jr. Dr. Decatur, IL 6252		DUO	1.001	E0- B	0.40		LOCCE		_	4/01/13	
ROUTE DESCRIPTIO SECTION								JBI CI	//		
COUNTY MACON								(D)			
BORING NO. B-15				T		LLOW STEM HA Surface Water Elev.			т	1	_
By URS Offset By URS Ground Surface Elev. 673.881 (ft.)	FLEV	DEPTH	B L O W S	C S Qu	0 1 S T	Groundwater Elev. First Encounter	19.5' (ft.) - (ft.)	E D E P T H	B L O W S	U S Qu	M O I S T
SOIL DESCRIPTION	(ft.)	(ft.)	/6"	(tsf)	(%)	SOIL DESCRI		(ft.) (ft.)	/6"	(tsf)	(%)
CLAY - A-6 Gray, moist, hard, low plasticity, little sand trace gravel		70	15 16 25	1.7	18.7						
END OF BORIÑG @ 71.0 FT.		75									
	-	90									
	-	95									
		100									

ENGINEERS, LLC 2900 N. Marlin Luther King Jr. Dr. Decalur, IL 6252			5	SOI	L	BORING LOG		Pr Da	oject ate <u>04</u>	1 of #: 313 //12/13	3516
ROUTE DESCRIPTIO) BY	CM,	BG,CF	ł,JM	
SECTION		LO	CATIO	N DEC	CATU	R, IL					
COUNTY MACON	_ s	TRU	CTUR	E NO.		(Exist)	(Prop	o.) _			
BORING NO. B-16	_ D	RILL	ING N	IETHO	D H	DLLOW STEM HAMMER TY	PE 14	0# 5	SAFET	Y HAMI	VIER
	E E V	D E P T H	B L O W S	U C S Qu	M 0 1 S T	Surface Water Elev. - (ft.)	E V	DEPTH	B L O W S	U C S Qu	O I S T
SOIL DESCRIPTION	(ft.)	(ft.)	/6"	(tsf)	(%)	SOIL DESCRIPTION	(ft.) ((ft.)	/6"	(tsf)	(%
18" CONCRETE on SAND - A-1-6 Erown, moist, medium dense, fine-medium		5	14 15 14					40	17 35		
-very loose			2	1.7	14.9			40	16 22 38-5		11.
SILTY CLAY LOAM - A-4 Brown, moist, stiff-very stiff, low plasticity,little sand, trace gravel -very stiff		10	5 6 10 8 13	4.8	13.3			45	13 14 21		10.
sand, trace gravel		15	16 4 11 - 15	2.9	12.1			50	15		
SILTY CLAY LOAM - A-6 Gray, moist, hard, low plasticity, trace gravel			13 14 17	3.0	11.8				20 32	6.1	10.
-very stiff		20	7 11 15	5.3	10.7			55	15 21		
		0.5	7 11 16	2.6	12.5	Gray, moist, dense, fine-coarse, trace gravel			17		
(*)free water @ 26.5'		25	2 9 13	17.0	7.6			60	3 9		
-hard		20	60		13.3				21		
-very stiff		30	2 2 24	5.6	11.3	-very dense		65	21 40 20-4		
-hard		35	19								

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer). The Standard Penetration Test (SPT) N Value is per (AASHTO T206)

BBS 137 (9/05)

USER NAME = monica crinion	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE = N.T.S.	DRAWN - GF	REVISED -
PLOT DATE = 4/29/2021	CHECKED - MCC	REVISED -

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

SOIL BORING LOGS I STRUCTURE NO. 058-9202 SHEET NO. SF-33 OF SF-35 SHEETS

	F.A.U. RTE	SEC	TION		COUNTY	TOTAL SHEETS	SHEE
	7448	09-0093	3-01-BR		MACON	1019	703
					CONTRACT	NO. 95	893
			ILLINOIS	FED. AI	D PROJECT		
_							

BBS 137 (9/05)

ROUTE DESCRIPTIO	s N <u>brush c</u> c	LLEGE ROAD		LOGGED		04/12/13 ,CH,JM
SECTION	LOCAT	ON DECATU	R, IL			
COUNTY MACON						
BORING NO. B-16	DRILLING	METHOD HO	OLLOW STEM H	AMMER TYP	E 140# SAFI	ETY HAMMER
Station By URS Offset By URS Ground Surface Elev. 675.023 (ft.)	E D B L E L E P O V T W H S	U M C O S I S I Qu T	Surface Water Elev. Groundwater Elev. First Encounter Upon Completion After Hrs.		1 F 1	. C C
SOIL DESCRIPTION	(ft.) (ft.) /6"	(tsf) (%)	SOIL DESCR		(ft.) (ft.) /6'	" (tsf) (%
END OF 3ORING @ 71.0 FT.	70 22 27 27 29 75 80 80 85 90					

2900 N. Martin Luther King Jr. Dr. Decatur, IL 62526								ate 03		
ROUTE DESCRIPTION							BY GC	/EE		
SECTION		LOC	CATIO	DEC	ATUF	R, ILLINOIS				
COUNTY MACON COUNTY	_ S	rruc	CTURE	NO.		(Exist)	(Prop.)			
BORING NO. B-24	_ DI	RILL	ING M	ETHOI	D <u>М</u> L			SAFET	Y HAMI	MEF
Station	E	D	В	U	М	Surface Water Elev (ft.) Groundwater Elev.		В	U	M
Offset	L E	E P T	L	3	0	First Encounter 666 19 (ft)	L E E P	L	3	0
Ground Surface Elev. 673.694 (ft.)	٧	T H	W S	Qu	S	Upon Completion (ft.) After Hrs (ft.)	V T	W S	Qu	S
SOIL DESCRIPTION	(ft.)	(ft.)	/6"	(tsf)	(%)	SOIL DESCRIPTION	(ft.) (ft.)	/6"	(tsf)	(%
	(,	()		()	(1.5)	JOIL BEJORIT TION	()		(12.)	(
14" CONCRETE							35	13	2.89	12
			11					32		-
Brown, moist, medium dense, fine-medium,			11					-		
trace gravel -loose		5	_4_							
	-		4 5			-stiff-very stiff	40	4		
-very loose-loose			2					7 9	2.68	13
(*)free water 7.5'			2] "		
-loose		10	4							
-10036		-10	3 3							
			-			-hard	45	9 48	7.3	11
CLAY LOAM A-6			12	1.24	14.2			12-1		
Brown, moist, very stiff, low plasticity, with sand trace gravel			18							
sand trace graver		15								
							50	8		10
			4					28 32-3		10.
SAND A-1-a Gray, saturated, medium dense, fine-medium,			11 17							
trace silt		20	. 7							
CLAY LOAM A-6			9	3.30	11.5		55	0.5		
Gray, moist, very stiff, low plasticity, with sand trace gravel			8			SAND A-1-a	- 35	25 27		H
-hard			11	5.56	10.1	Gray, saturated, very dense, fine-coarse, trace gravel		32		
		25	25			trace graver				
-begin mud rotary drilling		25	22 60-5							
SAND A-1-a Gray, saturated, very dense, fine-coarse,						-dense	60	28		-
Gray, saturated, very dense, fine-coarse, trace gravel			3					20		
CLAY LOAM A-6			20 40-5		11.6			1		
Gray, moist, hard, low plasticity, with sand		30	60-4					1		
trace gravel			00-4			-very dense	65	22		
						-voly utilise	- 55	30		
								30-5		

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer). The Standard Penetration Test (SPT) N Value is per (AASHTO T206) BBS 137 (9/05)

ENGINEERS, LLC 2900 N. Martin Luther King Jr. Dr. Decatur, IL 62526 ROUTE DESCRIPTIO		RUSI				BORING LOG		D	ate <u>03</u>		
SECTION						R, ILLINOIS					
COUNTY MACON COUNTY	_ s	TRU	CTURE	E NO.		(Exist)	(Pr	op.)			
BORING NO. B-24	_ D	RILL	ING M	ETHO) МС	JD ROTARY HAMMER		140#	SAFET	Y HAMI	ИEI
tation	E L E V	DEPTH	B L O W S	U C s Qu	M O I S T	Surface Water Elev.	(ft.) E (ft.) V	D E P T H	B L O W S	U C s Qu	
SOIL DESCRIPTION	(ft.)	(ft.)	/6"	(tsf)	(%)	SOIL DESCRIPTIO		(ft.)	/6"	(tsf)	(
		70				CLAY LOAM A-6 Gray, moist, hard, low plasticity, with se trace gravel	and		60-5		1
			60-6			-no recovery		105	60-4		1
-dense .		75	18 20								
			25			-no recovery		110	60-1		
-very dense		80	38 34 26-5			-no recovery		115	-		
									60-3		
		85	20 24 34			-no recovery		120	60-2		
		90	21								
			25 28			-no recovery		125	60-0		
		95	34 50			-Shale begins at 125.5'					
			10-1			SHALE Gray, moist, very dense, low plasticit weathered	54 <u>3.694</u>	130	60-0		

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer). The Standard Penetration Test (SPT) N Value is per (AASHTO T206)

BBS 137 (9/05)

AECOM

USER NAME = monica.crinion	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE = N.T.S.	DRAWN - GF	REVISED -
PLOT DATE = 4/29/2021	CHECKED - MCC	REVISED -

BBS 137 (9/05)

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

SOIL BORING LOGS II		
STRUCTURE NO. 058-9202	7448	09-
311(00101)L 140: 030-3202		
SHEET NO. SF-34 OF SF-35 SHEETS		

SECTION COUNTY 9-00933-01-BR MACON 1019 704 CONTRACT NO. 95893

SIIS ENGINEERS, LLC 2900 N. Martin Luther King Jr. Dr. Decatur, IL 62526			S	OI	LE	BORING LOG		Pr		1 of #: <u>916</u> 1/20	
ROUTE DESCRIPTIO	N <u>B</u>	RUSI	H COLL	EGE R	OAD	LOGGEI	р вү				
SECTION		LOC	CATIO	N DEC	ATUF	R, ILLINOIS					
COUNTY MACON COUNTY	_ s	TRU	CTURE	NO.		(Exist)	(Pro	p.) _			
BORING NO. B-25	_ DI	RILL	ING M	ETHO	D			40# S	AFET'	Y HAMI	<u>VER</u>
Station Offset Ground Surface Elev. 674.997 (ft.)	E L E V	DEPTH	B L O W S	U C s Qu	M 0 - 0 H	Surface Water Elev. (ft.)	L	D E P T H	B L O W S	U C ®	M O I S T
SOIL DESCRIPTION	(ft.)	(ft.)	/6"	(tsf)	(%)	SOIL DESCRIPTION	(ft.)	(ft.)	/6"	(tsf)	(%)
16" CONCRETE SILTY CLAY A-6 Brown, very mois:, very stiff, low plasticity, trace sand -shelby tube		5	7 7 12	2.0	28.6		-	35	34 60-5		11.5
SAND A-1-a Brown, very moist, loose, fine-medium, trace silt CLAY LOAM A-6		10	3 3 5 6 6 8	1.6	15.5		-	45	30 60-6	4.6	10.4
Brown, moist, stiff, low plasticity, little sand, trace gravel -hard		15	9 16 35 10 26	4.7	13.8			45	7 18 28		10.5
(*)free water @ 17.0' CLAY LOAM A-6 Gray, moist, very stiff, low plasticity, with		20	34 4 7 12 5	1.9	12.7			50	21 25 35-6		12.9
sand, trace gravel			8 12 7 8 16	1.1	10.5	SAND A-1-a Gray, saturated, very dense, fine-coarse, trace gravel		55	34 40 20-3		
-hard .		25	18 24 25	1.4	11.8			60	29 33		
-very stiff -2 attempts no recovery -begin mud rotary drilling -hard		30	10 12 14 34 60-3				-	65	27-5 32 40 20-3		

The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer). The Standard Penetration Test (SPT) N Value is per (AASHTO T206) BBS 137 (9/05) SIIS ENGINEERS, LLC 2900 N. Martin Luther King Jr. Dr. Decatur, IL 62526 Page _2_ of _2_ SOIL BORING LOG Project #: 916780 Date 3/11/20 ROUTE _____ DESCRIPTION BRUSH COLLEGE ROAD LOGGED BY SECTION LOCATION DECATUR, ILLINOIS STRUCTURE NO. COUNTY MACON COUNTY (Exist) ____ (Prop.) _ BORING NO. B-25 DRILLING METHOD HAMMER TYPE 140# SAFETY HAMMER Station L C S W Qu Ground Surface Elev. 674.997 (ft.) Qu /6" (tsf) (%) SOIL DESCRIPTION (ft.) (ft.) /6"

CLAYLOAM A-6
Gray, moist, hard, low plasticity, with sand, trace gravel 60-5 SOIL DESCRIPTION (ft.) (ft.) 60-2 110 60-3 60-2 60-6 SAND A-3 Gray, saturated, very dense, fine 60-5 SHALE Gray, moist, very dense, weathered 60-2 60-1 60-5 54<u>4 997</u> 130 END OF BORING @ 130.0 FT.

AECOM


USER NAME = monica.crinion	DESIGNED -	REVISED -
	CHECKED -	REVISED -
PLOT SCALE = N.T.S.	DRAWN - GF	REVISED -
PLOT DATE = 4/29/2021	CHECKED - MCC	REVISED -


STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**


The Unconfined Compressive Strength (UCS) Failure Mode is indicated by (B-Bulge, S-Shear, P-Penetrometer). The Standard Penetration Test (SPT) N Value is per (AASHTO T206)


BBS 137 (9/05)


SOIL BORING LOGS III		RTE. SECTION		COUNTY	TOTAL SHEETS	SHEET NO.
STRUCTURE NO. 058-9202	7448	8 09-00933-01-BR		MACON	1019	705
31KUCTURE NO. 038-9202				CONTRACT	Γ NO. 95	893
SHEET NO. SF-35 OF SF-35 SHEETS		ILLINO15	FED. AI	D PROJECT		

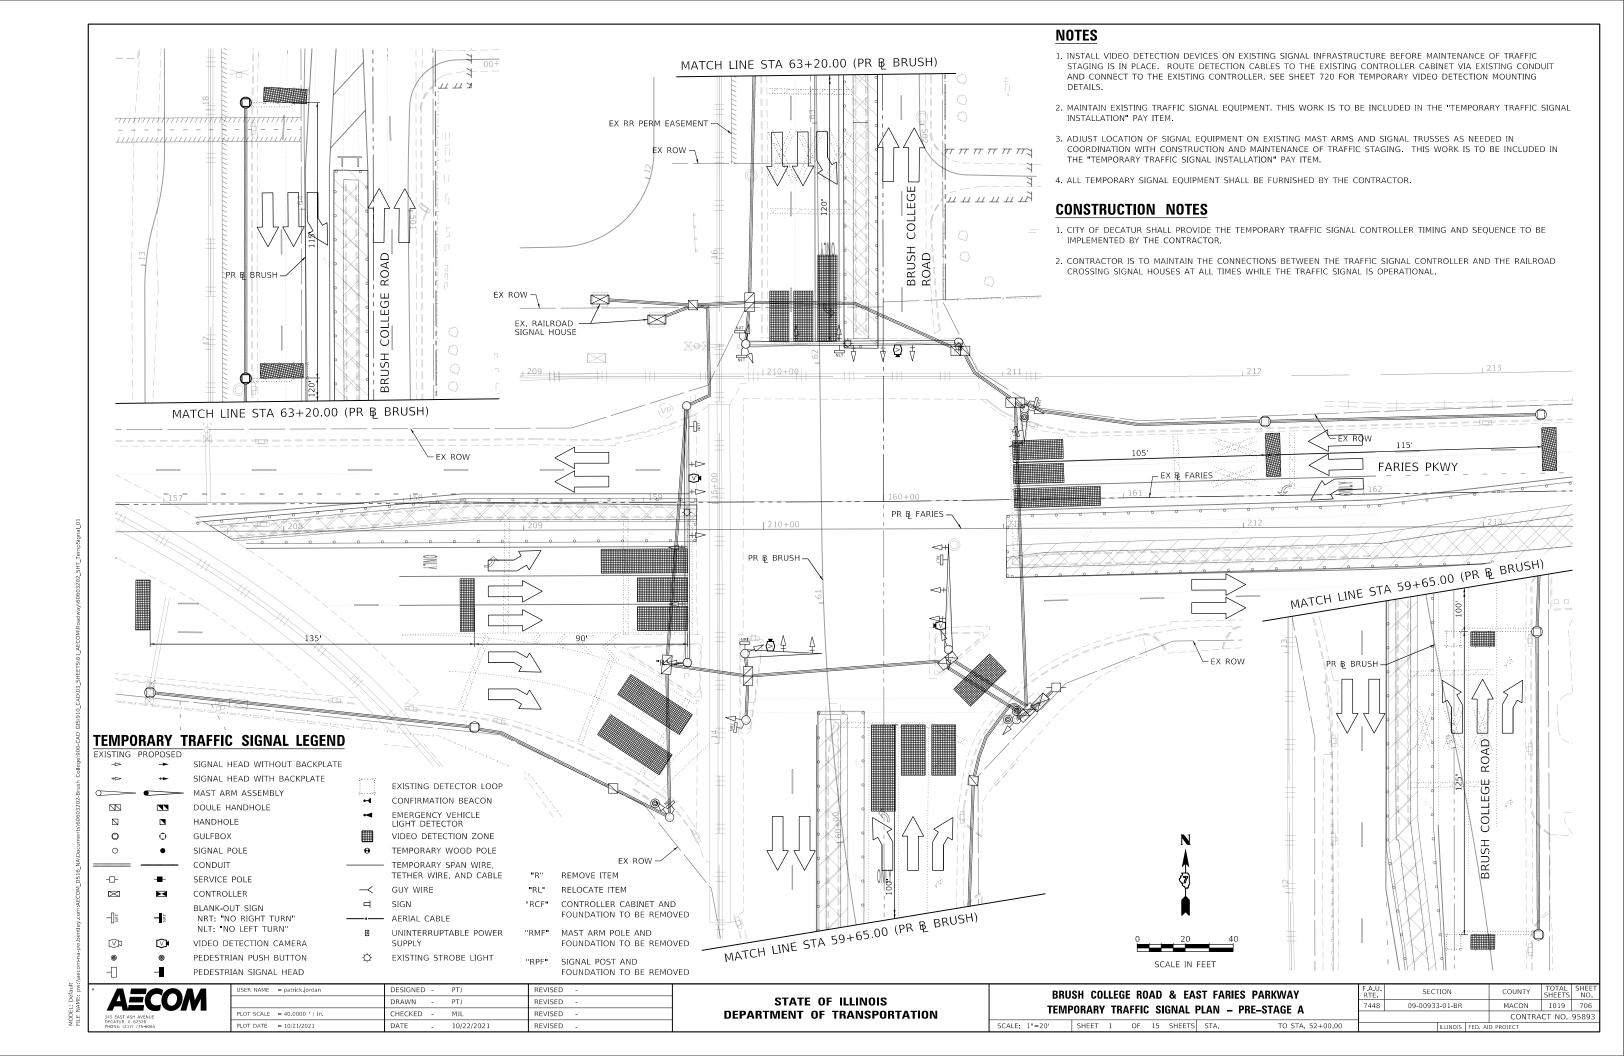

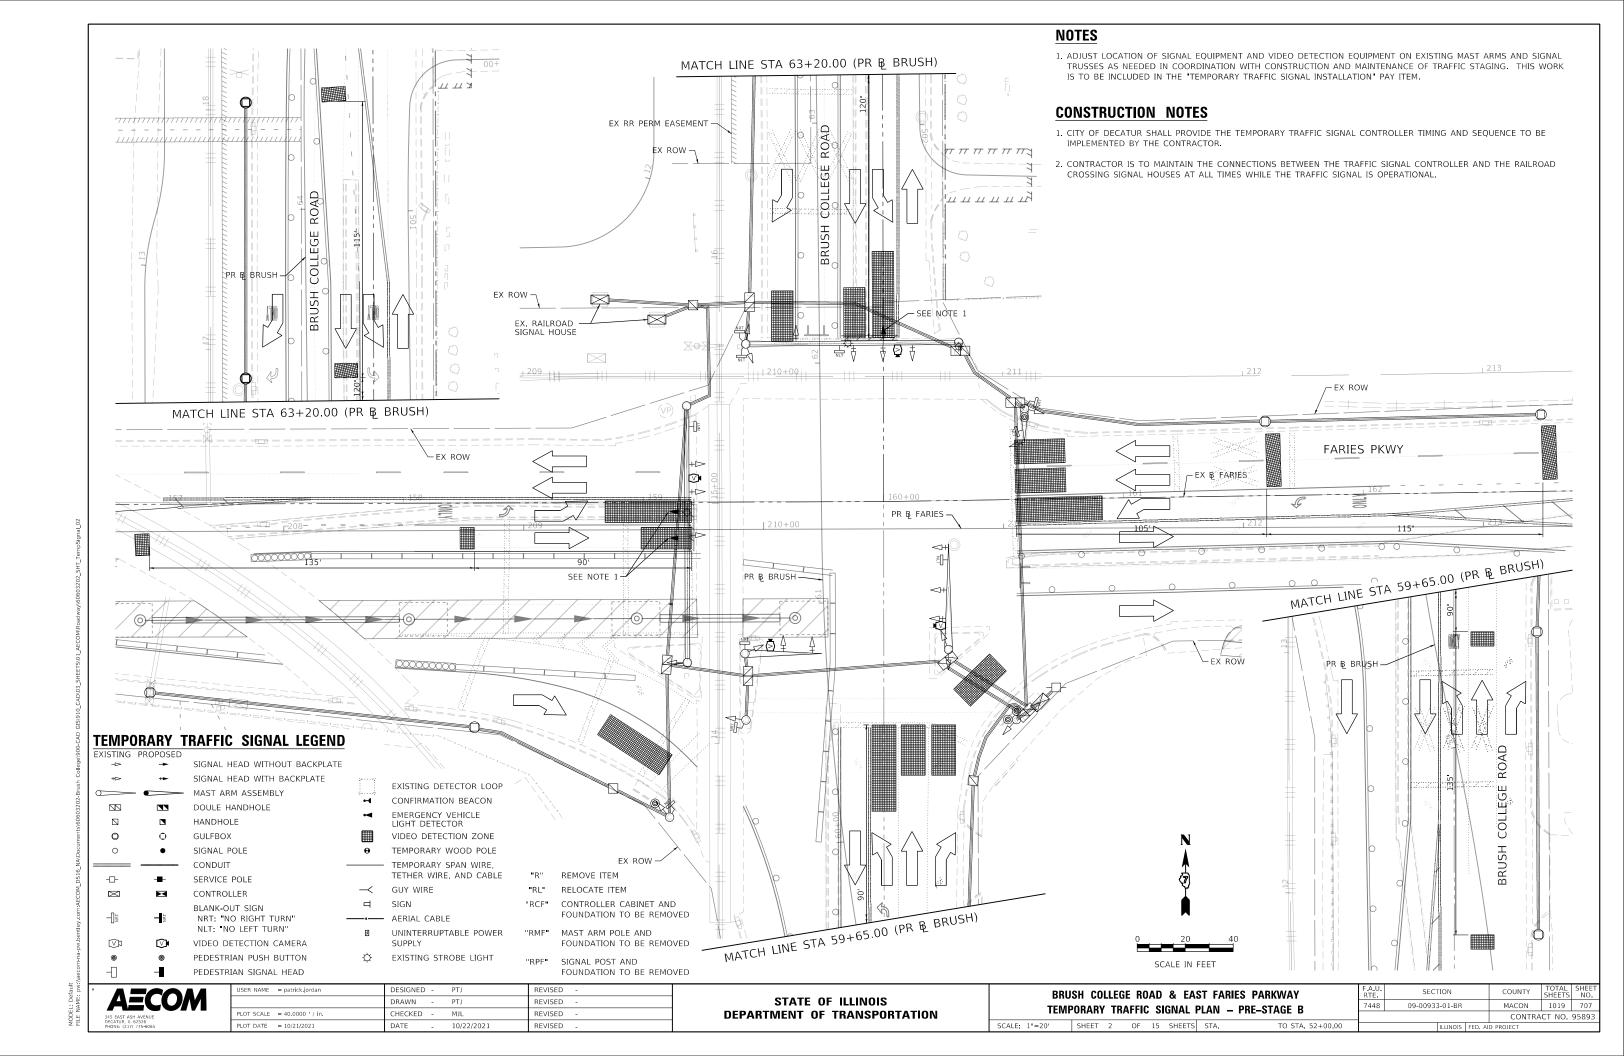


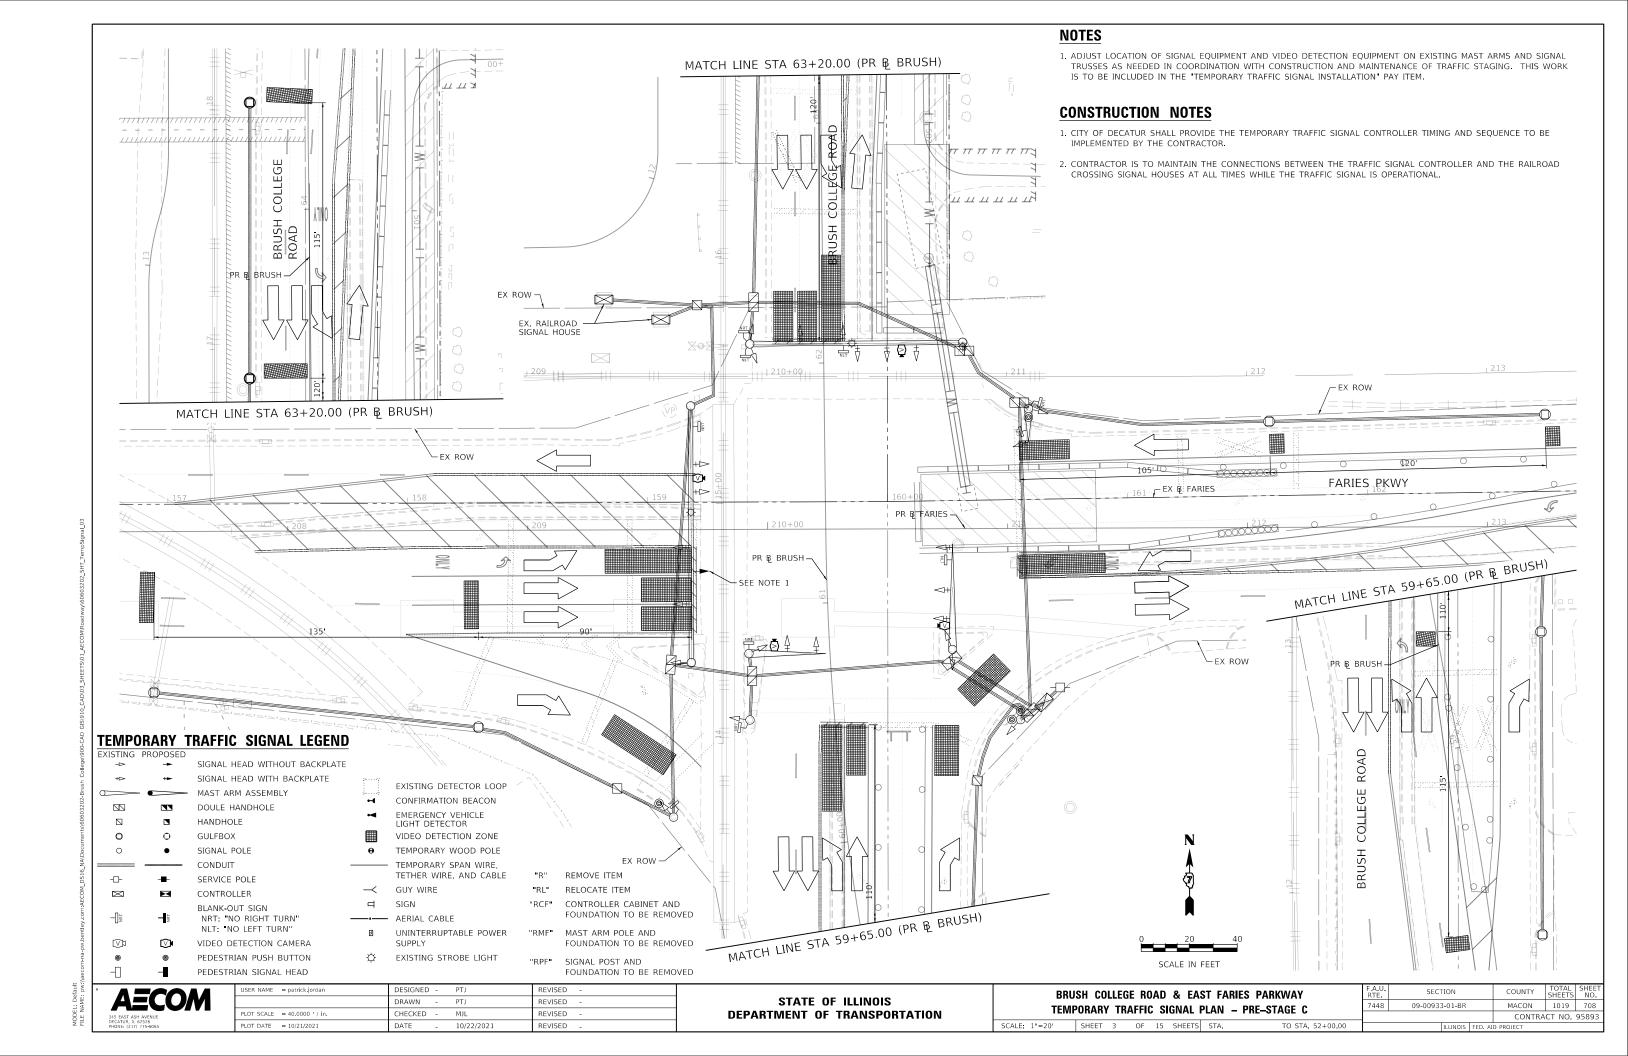

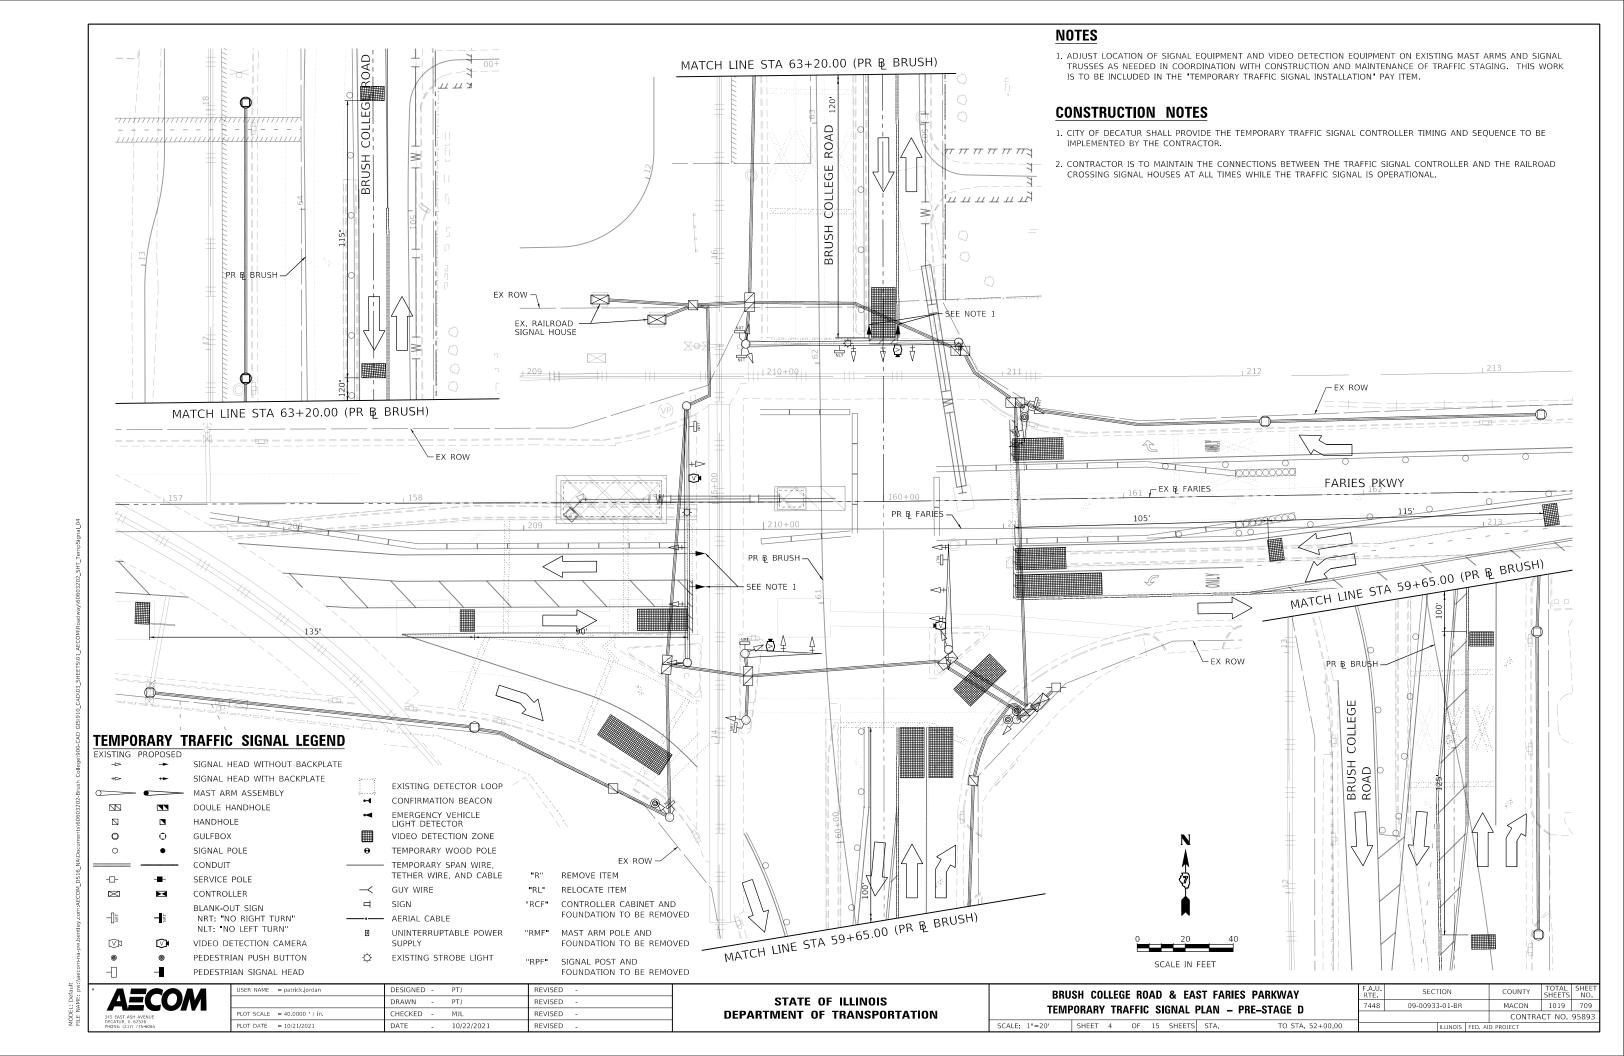


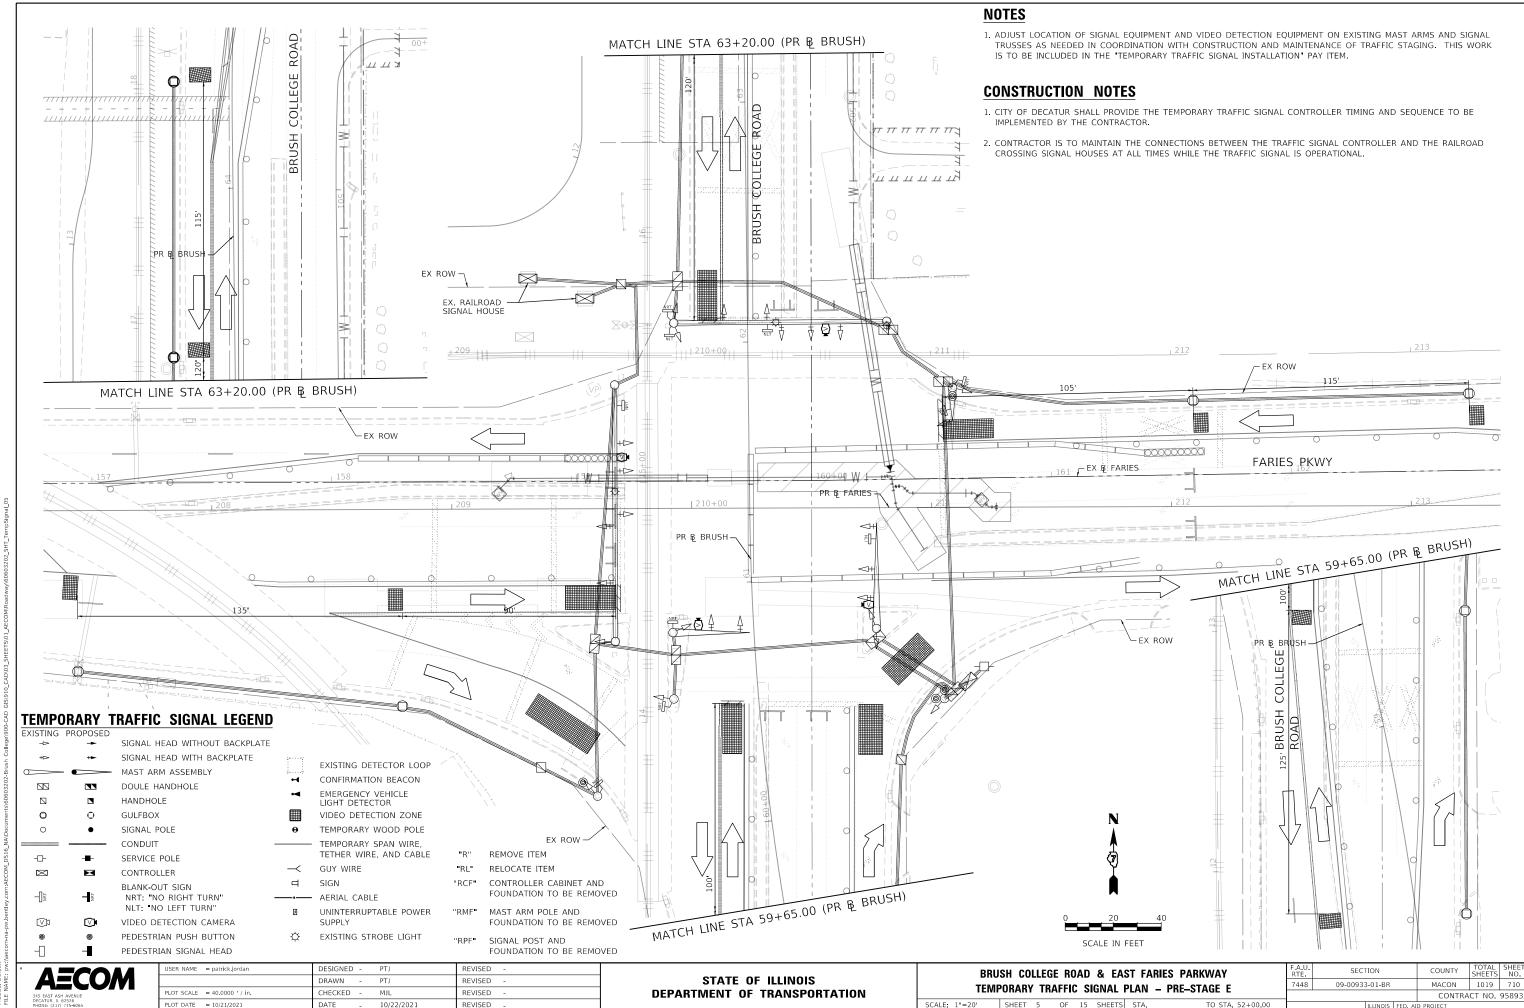


MODEL; Default

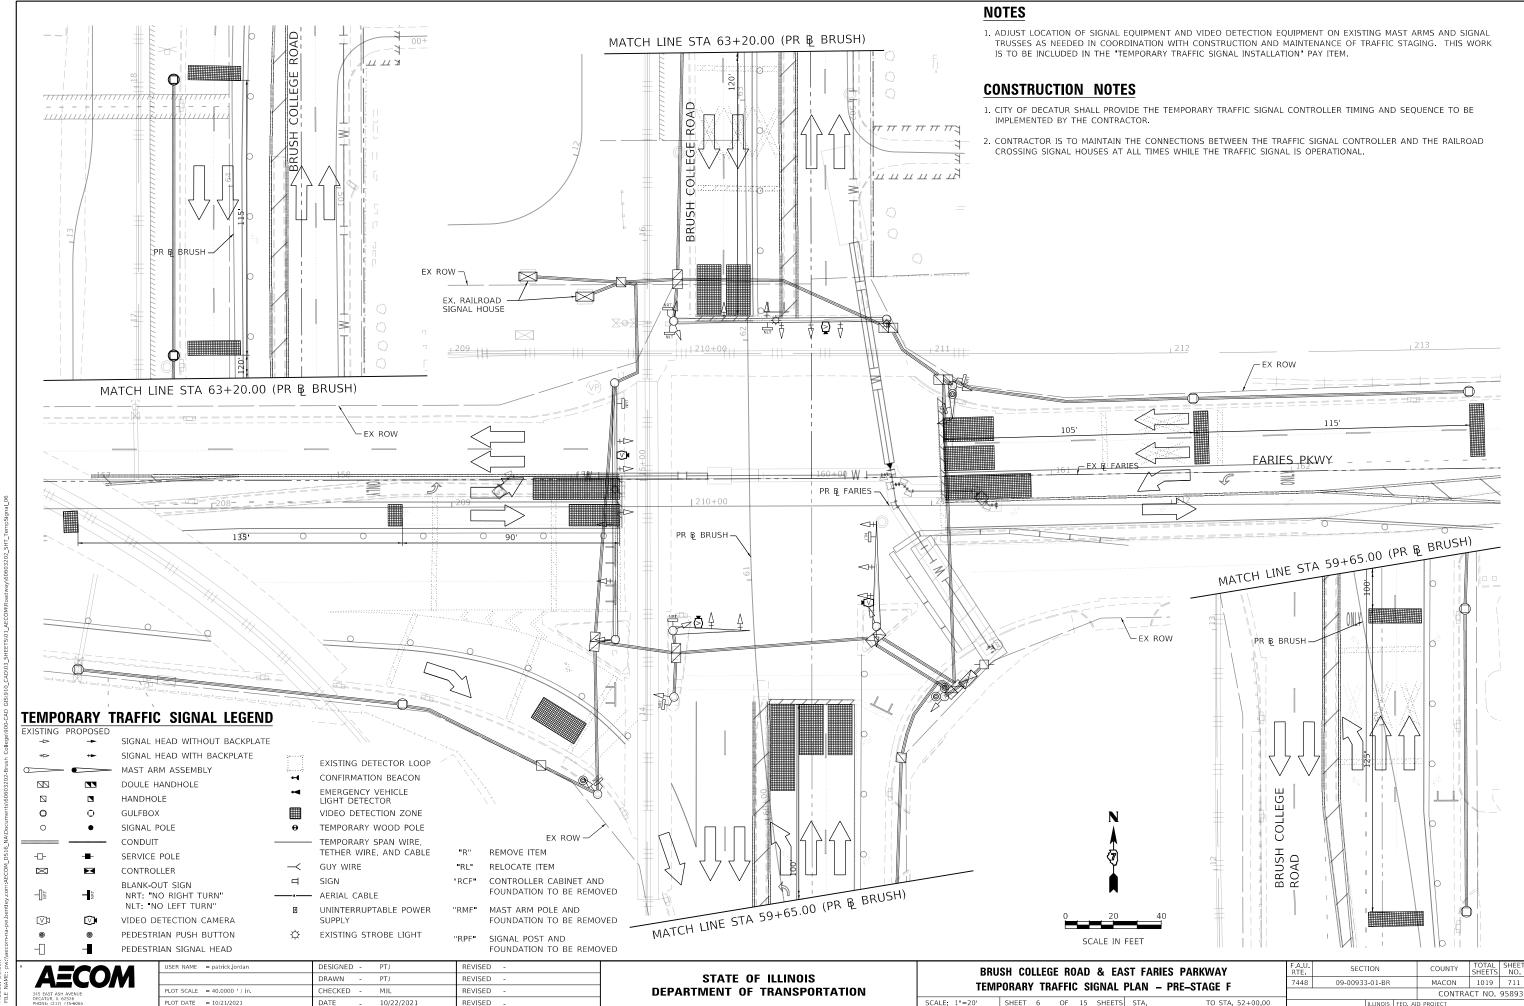

MODEL: Default

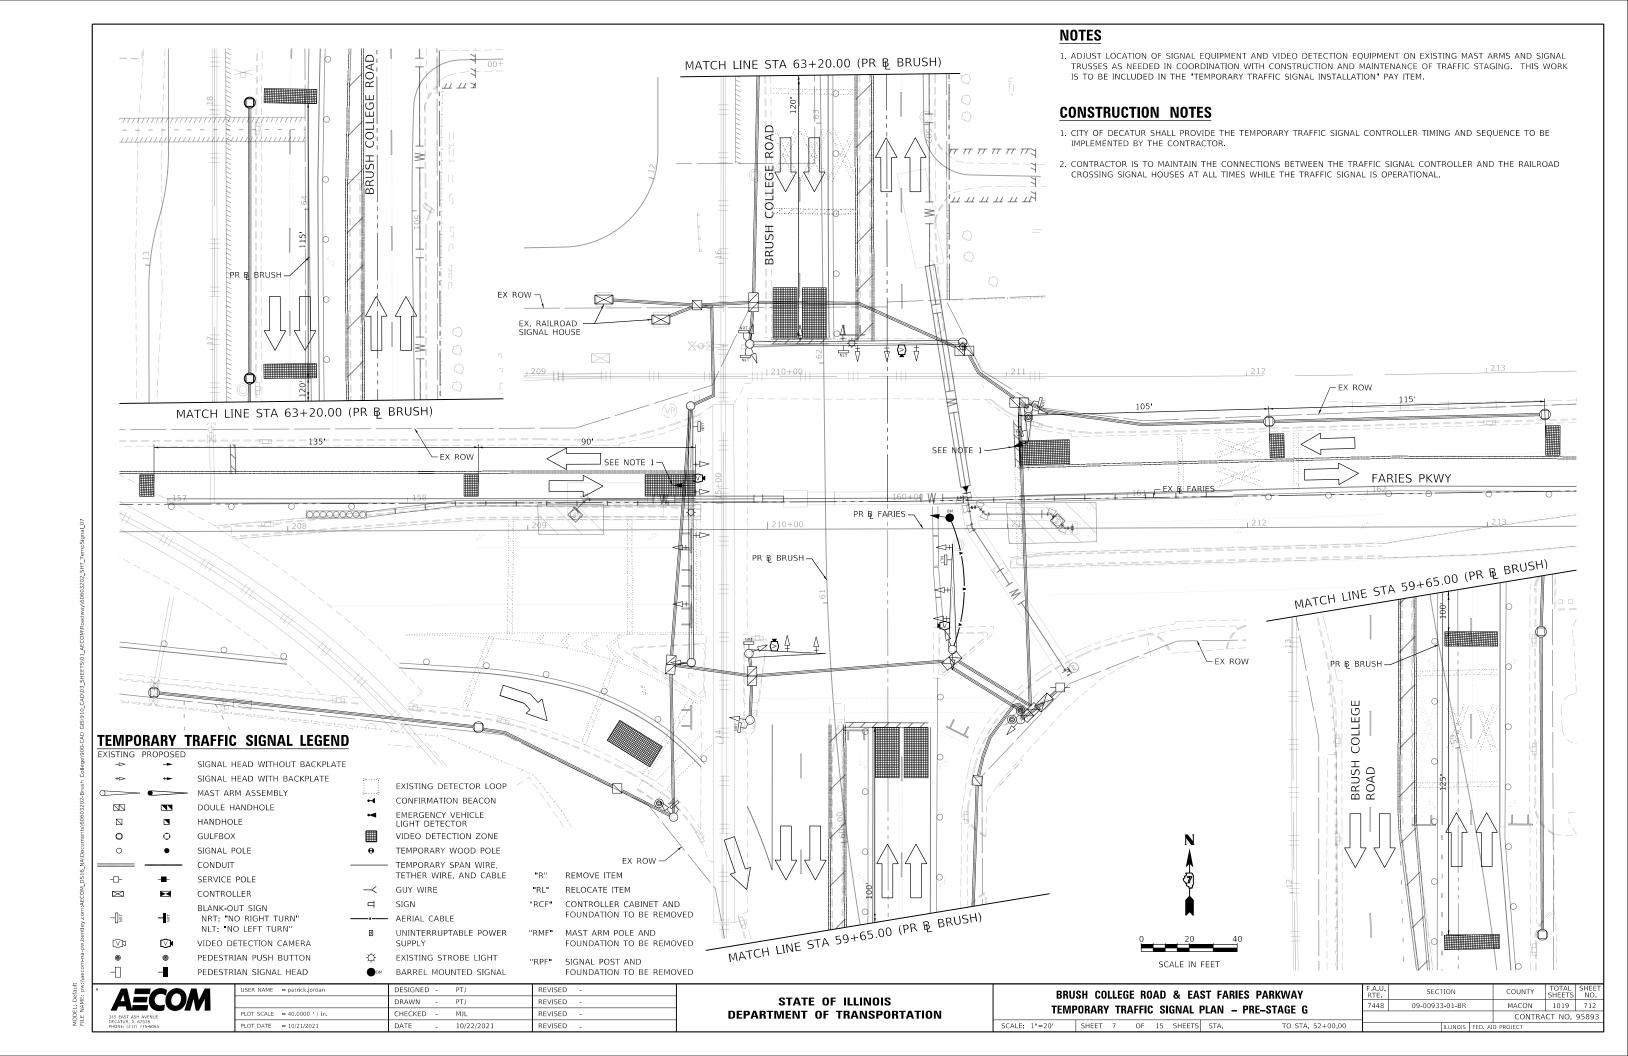

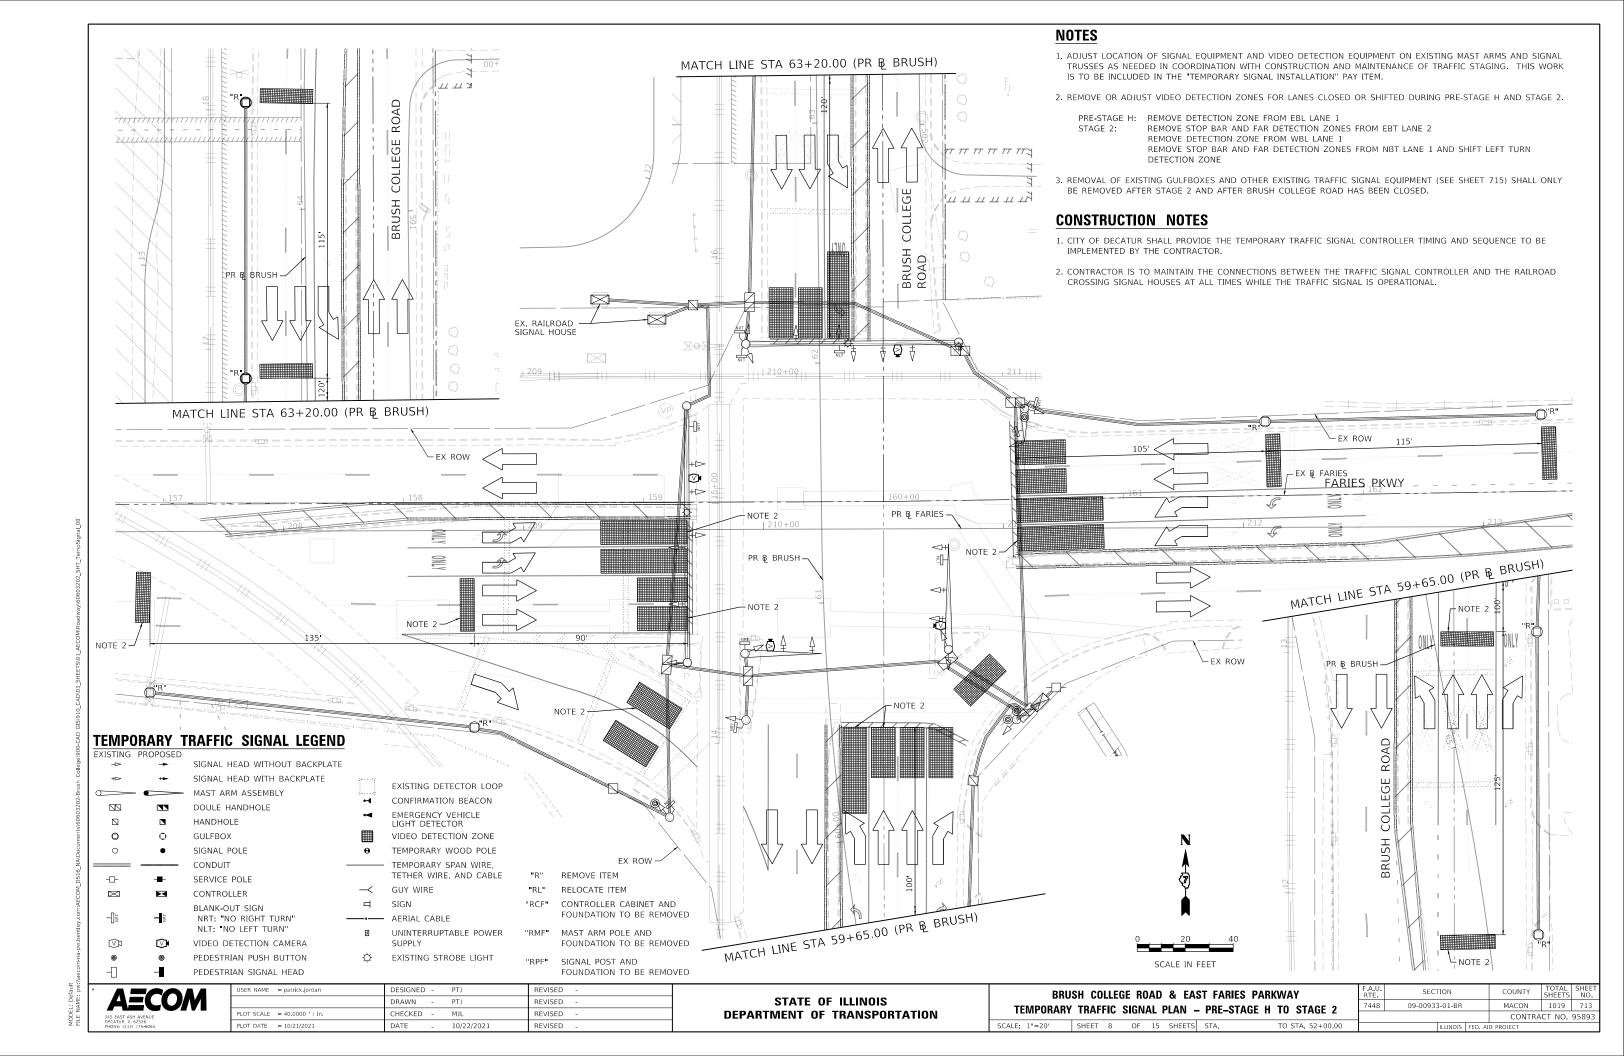

TEMPORARY PHASE DESIGNATION DIAGRAM

RIGHT TURN OVERLAP PHASE DESIGNATION

OVERLAP <u>LETTER</u>		PERMISSIVE <u>PHASE</u>	PROTECTED <u>PHASE</u>	
А	=	2	+	3
В	=	8	+	1

NOTES

- 1. MAINTAIN EXISTING TRAFFIC SIGNAL EQUIPMENT FROM PRE-STAGE A TO
- 2. LOOP DETECTION SHALL BE ABANDONED FOLLOWING INSTALLATION OF TEMPORARY VIDEO DETECTION DEVICES.
- 3. CONTRACTOR IS TO MAINTAIN THE CONNECTIONS BETWEEN THE TRAFFIC SIGNAL CONTROLLER AND THE RAILROAD CROSSING SIGNAL HOUSES AT ALL TIMES WHILE THE TRAFFIC SIGNAL IS OPERATIONAL.
- 4. BAG SIGNAL HEADS DURING PRE-STAGES D, E AND G.
- 5. BAG SIGNAL HEADS DURING PRE-STAGES D, E, F AND G.
- 6. BAG SIGNAL HEADS DURING PRE-STAGES E AND G.
- 7. BAG SIGNAL HEADS DURING PRE-STAGES F AND G.
- 8. IN PRE-STAGE G, ATTACH SIGNAL HEAD TO BARREL MOUNTED POLE AND ROUTE AERIAL CABLE TO MAST ARM.

T ELEC	TOTAL WATTAGE				
TYPE	NO. OF LAMPS	WATT XINCAND		% OPERATION	
SIGNAL (RED)	26		17	0.50	221.00
(YELLOW)	26		25	0.25	162.50
(GREEN)	26		15	0.25	97.50
ARROW	14		12	0.10	16.80
CONTROLLER	1		300	1.00	300.00
VIDEO SYSTEM	1	150	-	1.00	150.00
BLANK-OUT	10		30	0.10	30.00
STROBE LIGHT	3		12	0.10	3.60
ENERGY COSTS	TO:			TOTAL =	981.40

CITY OF DECATUR

ENERGY SUPPLY: CONTACT: SHAWN SPILLMAN, SUPERVISOR

PHONE: (888) 659-4540 COMPANY: AMEREN ILLINOIS

LEGEND



EXISTING BLANK-OUT SIGN NRT: "NO RIGHT TURN" NLT: "NO LEFT TURN"




EXISTING CABINET



STATE OF ILLINOIS

FARIES PARKWAY & JUG HANDLE CONNECTOR ROAD


SECTION COUNTY 7448 09-00933-01-BR MACON 1019 714 CONTRACT NO. 95893

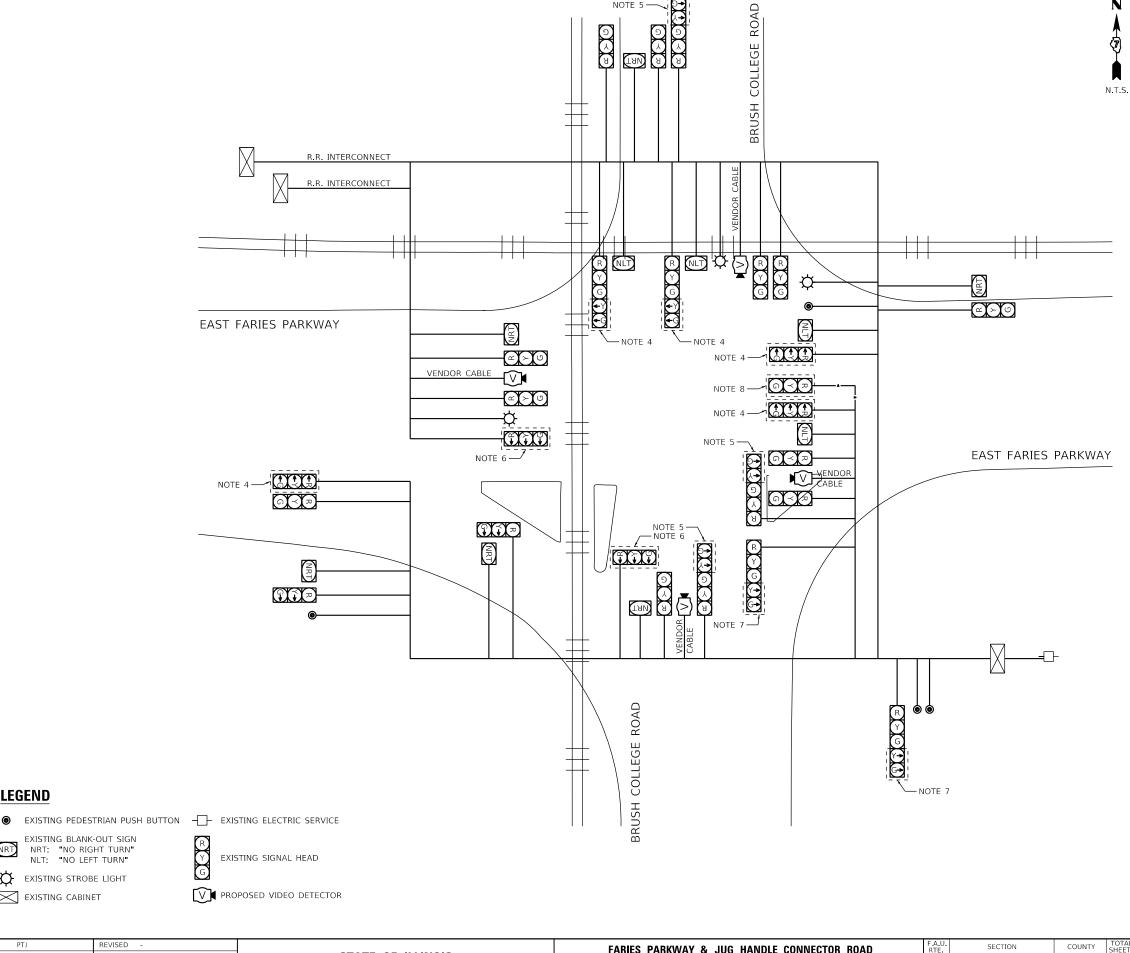



DESIGNED -REVISED DRAWN -PTJ REVISED LOT SCALE = 2.0000 ' / in. REVISED PLOT DATE = 4/28/2021 4/30/2021 REVISED

DEPARTMENT OF TRANSPORTATION

TEMPORARY TRAFFIC SIGNAL CABLE PLAN - STAGES 0A TO 2 SHEET 9 OF 15 SHEETS STA.

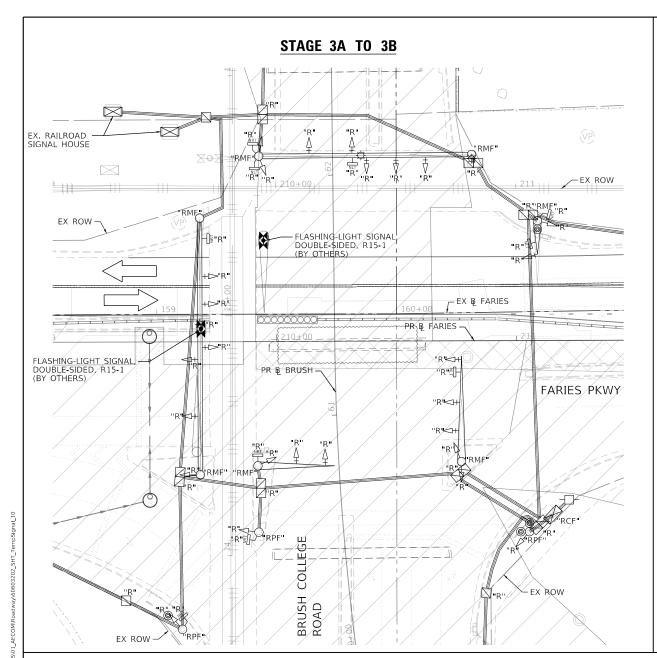

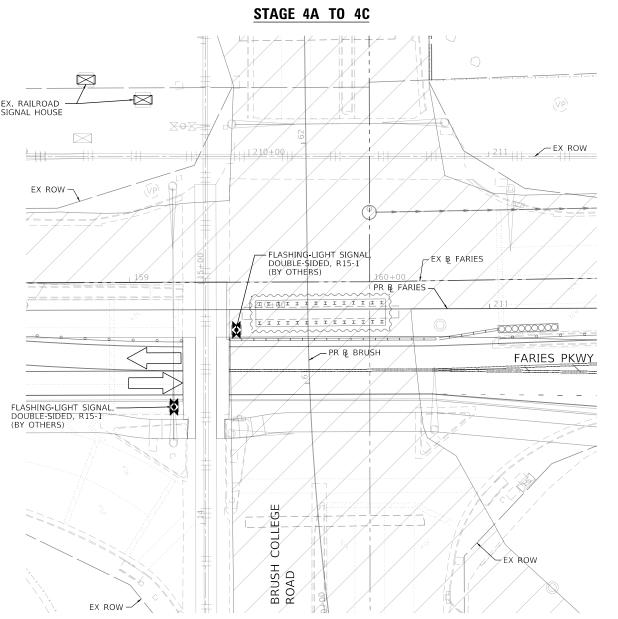

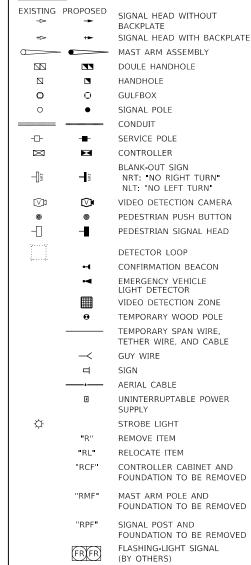

TEMPORARY TRAFFIC SIGNAL

LEGEND

NOTES

- 1. IC RR TO ADJUST LOCATION OF SIGNAL AND RAILROAD FLASHER EQUIPMENT AS NEEDED IN COORDINATION WITH CONSTRUCTION AND MAINTENANCE OF TRAFFIC STAGING.
- 2. EXISTING TRAFFIC SIGNAL EQUIPMENT SHALL ONLY BE REMOVED AFTER STAGE 2 AND AFTER BRUSH COLLEGE ROAD HAS BEEN CLOSED.
- 3. TEMPORARY RAILROAD FLASHER EQUIPMENT AND CABLES ARE TO BE INSTALLED BY IC RR. HANDHOLES AND CONDUIT INFRASTRUCTURE USED BY IC RR TO OPERATE THE TEMPORARY SIGNAL AND RAILROAD FLASHER INFRASTRUCTURE FROM STAGE 3A TO 4C SHALL REMAIN UNTIL THE PERMANENT GRADE CROSSING WARNING EQUIPMENT IS ACTIVATED.

REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT: EACH 1

THE FOLLOWING EXISTING TRAFFIC SIGNAL EQUIPMENT SHALL BE REMOVED BY THE CONTRACTOR, SHALL REMAIN THE PROPERTY OF THE CITY AND SHALL BE DELIVERED BY THE CONTRACTOR TO THE CITY YARD AS PER THE TRAFFIC SIGNAL SPECIFICATIONS OR AS DIRECTED BY THE CITY TRAFFIC ENGINEER.

- CONTROLLER
- 1 EACH CABINET (COMPLETE)

THE FOLLOWING ITEMS SHALL BE REMOVED BY THE CONTRACTOR AND SHALL BE DISPOSED OF BY THEM OUTSIDE THE RIGHT-OF-WAY AT THEIR EXPENSE. THE SALVAGE VALUE OF THE REMOVED EQUIPMENT SHALL BE REFLECTED IN THE CONTRACT BID PRICE.


- DUAL STEEL MONOTUBE TRUSS
- MAST ARM ASSEMBLY AND POLE 3 EACH 3 FACH TRAFFIC SIGNAL POST
- 1 EACH PEDESTRIAN PUSH BUTTON POST
- 3-SECTION SIGNAL HEAD
- 7 EACH 5-SECTION SIGNAL HEAD
- 4 EACH PEDESTRIAN PUSH BUTTON
- 16 EACH TRAFFIC SIGNAL BACKPLATE
- 3 EACH STROBE LIGHT
- 10 EACH ILLUMINATED BLANK OUT SIGN


CONSTRUCTION NOTES

1 TEMPORARY RATIROAD FLASHERS ARE TO BE IN OPERATION WHEN TRAFFIC SIGNAL HEADS ARE DEACTIVATED. CONTRACTOR IS TO COORDINATE WITH IC RR TO PROVIDE FLAGGERS FOR ANY PERIOD OF TIME WHEN BOTH TRAFFIC SIGNAL AND RAILROAD FLASHERS ARE NOT IN OPERATION. THIS WORK IS TO BE INCLUDED IN THE "TEMPORARY TRAFFIC SIGNAL INSTALLATION" PAY ITEM.



48" x 9" INSTALLED BY OTHERS

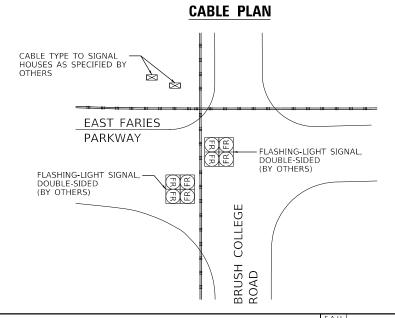

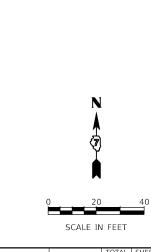


USER NAME = patrick.jordan	DESIGNED -	PTJ	REVISED -
	DRAWN -	PTJ	REVISED -
PLOT SCALE = 40.0000 ' / in.	CHECKED -	MJL	REVISED -
PLOT DATE = 10/21/2021	DATE -	10/22/2021	REVISED -

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

BRU	SH COLLEC	SE ROAD	& EA	ST FARIES	S PARKWAY
TEMPOR	ARY TRAF	FIC SIG	NAL PLA	NN – STA	GES 3A TO 4C
SCALE: 1"=20'	SHEET 10	OF 15	SHEETS	STA.	TO STA. 52+00

F.A.U. RTE	SECT	ΓΙΟΝ		COUNTY	TOTAL SHEETS	SHEET NO.
7448	09-00933-01-BR			MACON	1019	715
				CONTRA	CT NO.	95893
		ILLINO1S	FED. AI	D PROJECT		

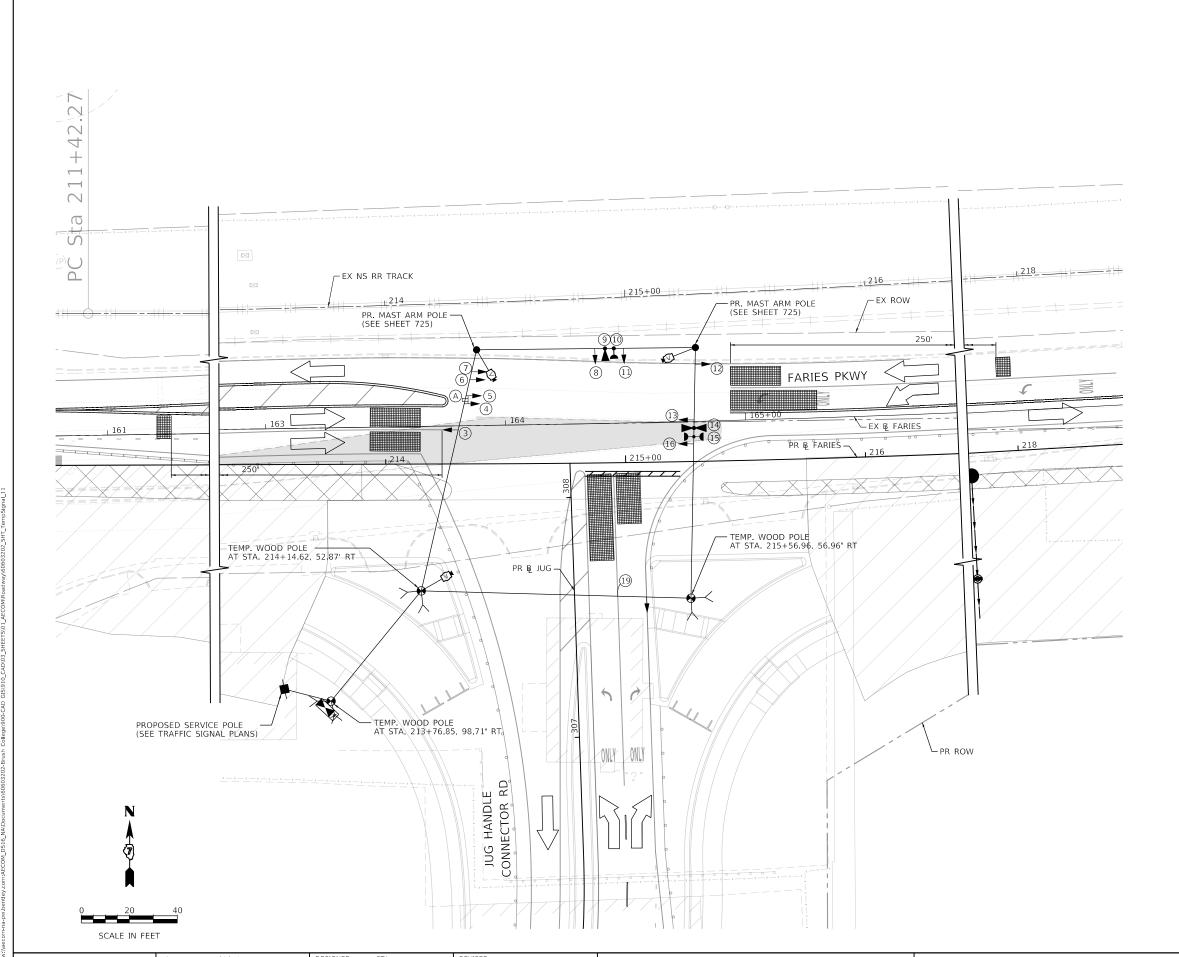

TEMPORARY TRAFFIC SIGNAL LEGEND

SIGNAL HEAD WITHOUT BACKPLATE

CONDUIT

■ SERVICE POLE

UNINTERRUPTABLE POWER SUPPLY

VIDEO DETECTION CAMERA

PEDESTRIAN PUSH BUTTON

PEDESTRIAN SIGNAL HEAD

CONFIRMATION BEACON

■ EMERGENCY VEHICLE LIGHT DETECTOR

VIDEO DETECTION ZONE

R" REMOVE ITEN

TEMPORARY WOOD POLE

TEMPORARY SPAN WIRE, TETHER WIRE, AND CABLE

→ GUY WIRE

ロ

AERIAL CABLE

PROPOSED MAST ARM POLE

NOTES

- ALL CONTROL EQUIPMENT SHALL BE FURNISHED BY THE CONTRACTOR.
- 2. ALL TRAFFIC SIGNAL SECTIONS AND PEDESTRIAN SIGNAL SECTIONS SHALL BE 12". HEADS SHALL BE PLACED AS INDICATED ON THE TEMPORARY TRAFFIC SIGNAL PLAN OR AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHALL FURNISH ENOUGH CABLE SLACK TO RELOCATE HEADS TO ANY POSITION ON THE SPAN WIRE FOR CONSTRUCTION STAGING. THE TEMPORARY TRAFFIC SIGNAL SHALL REMAIN IN OPERATION DURING ALL SIGNAL HEAD RELOCATIONS. EACH TEMPORARY TRAFFIC SIGNAL HEAD SHALL HAVE ITS OWN CABLE FROM THE CONTROLLER CABINET TO THE SIGNAL HEAD.
- 3. UNINTERRUPTIBLE POWER SUPPLY (UPS) SYSTEMS SHALL BE INSTALLED AND MADE OPERATIONAL AT TEMPORARY TRAFFIC SIGNAL INSTALLATIONS WHERE UPS IS INSTALLED AT THE EXISTING TRAFFIC SIGNAL, TEMPORARY TRAFFIC SIGNALS AT RAILROAD INSTERSECTIONS, AND TEMPORARY TRAFFIC SIGNALS AT INTERSECTIONS WITH FIRE STATION ACTUATED EMERGENCY VEHICLE PRE-EMPTION, OR WHEN INDICATED ON THE PLANS.
- 4. SEE SHEET 720 FOR TEMPORARY VIDEO DETECTION MOUNTING DETAIL.
- SEE SHEET 721 FOR STREET SIGN PANEL DETAILS. FURNISHING AND INSTALLATION OF SIGN PANELS UNDER THE TEMPOARY CONDITION AND RELOCATION OF SIGN PANELS TO THE PERMANAT MAST ARMS SHALL BE INCLUDED IN UNDER THE "SIGN PANEL - TYPE 1" PAY ITEM.

RESTORATION OF WORK AREA:

RESTORATION OF THE TRAFFIC SIGNAL WORK AREA SHALL BE INCLUDED IN THE COST OF THE RELATED PAY ITEM SUCH AS FOUNDATION, CONDUIT HANDHOLE, TRENCH AND BACKFILL, ETC., AND NO EXTRA COMPENSATION SHALL BE ALLOWED. ALL ROADWAY SURFACES SUCH AS SHOULDERS, MEDIANS, SIDEWALKS, PAVEMENT, ETC. SHALL BE REPLACED IN KIND. ALL DAMAGE TO MOWED LAWNS SHALL BE REPLACED WITH AN APPROVED SOD, AND ALL DAMAGE TO UNMOWED FIELDS SHALL BE SEEDED IN ACCORDANCE WITH STANDARD SPECIFICATIONS 252 AND 250 RESPECTIVELY.

SIGN(A)



R10-5
24" x 30"
1-REQUIRED
INCLUDED IN "TEMPORARY
TRAFFIC SIGNAL INSTALLATION"
PAY ITEM


AECOM

USER NAME = patrick.jordan	DESIGNED - PTJ	REVISED -
	DRAWN - PTJ	REVISED -
PLOT SCALE = 40.0000 ' / in.	CHECKED - MJL	REVISED -
PLOT DATE = 4/28/2021	DATE - 4/30/2021	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FARIE	S PARKWA	Y & JU	G HANDLE	CONNECTOR	ROAD
TEMPORA	ARY TRAFF	IC SIGNA	AL PLAN -	- STAGES 3A	AND 3B
SCALE: 1"=20'	SHEET 11	OF 15	SHEETS ST	Α.	TO STA.

F.A.U. RTE	SECT	ΓΙΟΝ	COUNTY	TOTAL SHEETS	SHEE NO.	
7448	09-00933	3-01-BR		MACON	1019	716
		CONTRA	CT NO.	9589.		
		ILLINO1S	FED. AI	D PROJECT		

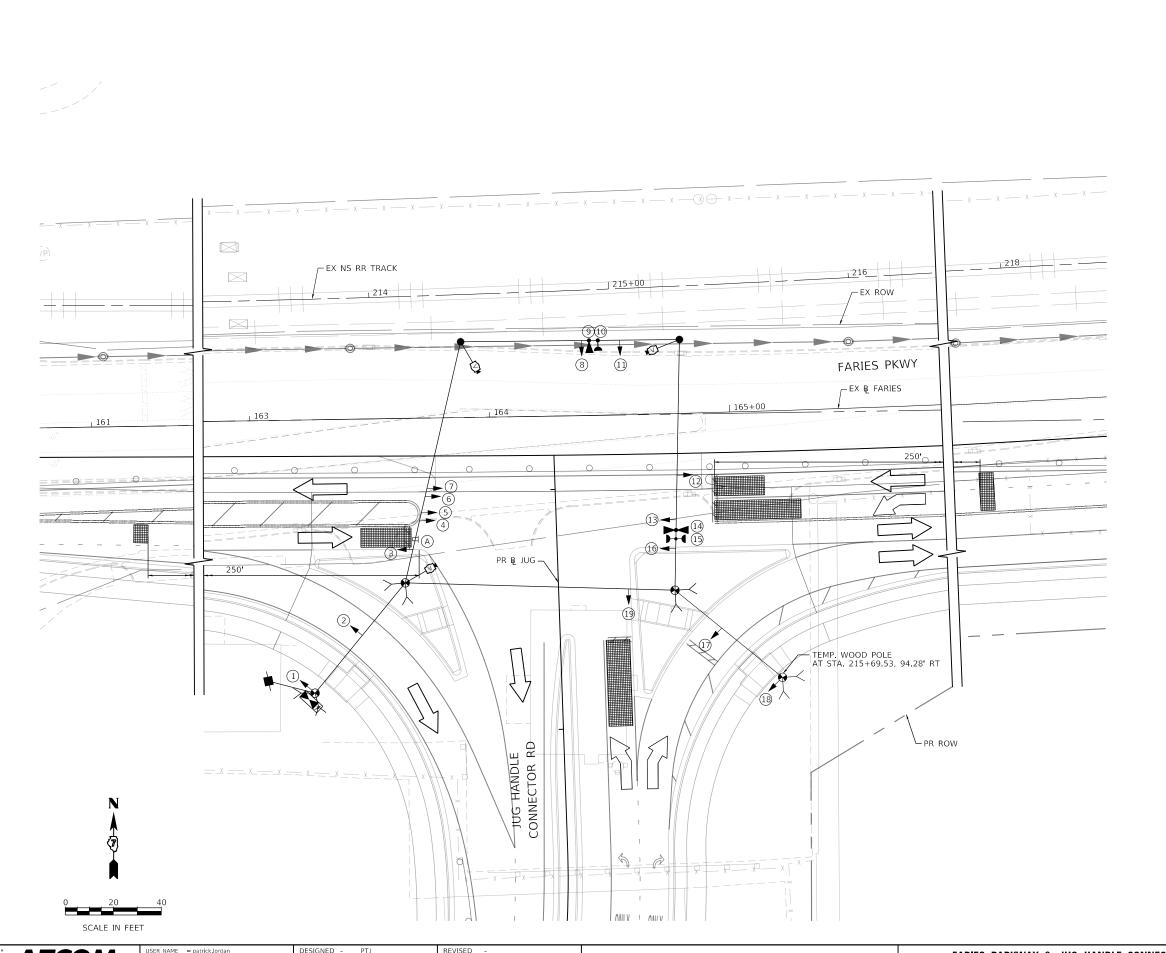

TEMPORARY TRAFFIC SIGNAL LEGEND

→ SIGNAL HEAD WITHOUT BACKPLATE

CONDUIT

■ SERVICE POLE

■ CONTROLLER

UNINTERRUPTABLE POWER SUPPLY

VIDEO DETECTION CAMERA

PEDESTRIAN PUSH BUTTON

PEDESTRIAN SIGNAL HEAD

CONFIRMATION BEACON■ EMERGENCY VEHICLE LIGHT DETECTOR

VIDEO DETECTION ZONE

R" REMOVE ITEM

TEMPORARY SPAN WIRE, TETHER WIRE, AND CABLE

→ GUY WIRE

☐ SIGN

——•— AERIAL CABLE

PROPOSED MAST ARM POLE

NOTES

1. ADJUST LOCATION OF SIGNAL EQUIPMENT AND VIDEO DETECTION EQUIPMENT ON EXISTING MAST ARMS AND SIGNAL TRUSSES AS NEEDED IN COORDINATION WITH CONSTRUCTION AND MAINTENANCE OF TRAFFIC STAGING. THIS WORK IS TO BE INCLUDED IN THE "TEMPORARY TRAFFIC SIGNAL INSTALLATION" PAY ITEM.

LEFT ON GREEN ARROW

SIGNA

R10-5 24" x 30" 1-REQUIRED INCLUDED IN "TEMPORARY TRAFFIC SIGNAL INSTALLATION" PAY ITEM




USER NAME = patrick.jordan	DESIGNED	-	PTJ	REVISED	-
	DRAWN	-	PTJ	REVISED	-
PLOT SCALE = 40.0000 ' / in.	CHECKED	-	MJL	REVISED	-
PLOT DATE = 4/28/2021	DATE	-	4/30/2021	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FARIE	S PARKW	'AY & JU	G HANDLE CO	NNECTOR ROAD
TEN	/IPORARY	TRAFFIC	SIGNAL PLAN	- STAGE 4A
SCALE: 1"=XX'	SHEET 12	OF 15	SHEETS STA.	TO STA.

F.A.U. RTE	SECTION		COUNTY	TOTAL SHEETS	SH N
7448	09-00933-01-BR		MACON	1019	7
			CONTRA	CT NO.	958
	ILLINOIS	FED. AI	D PROJECT		

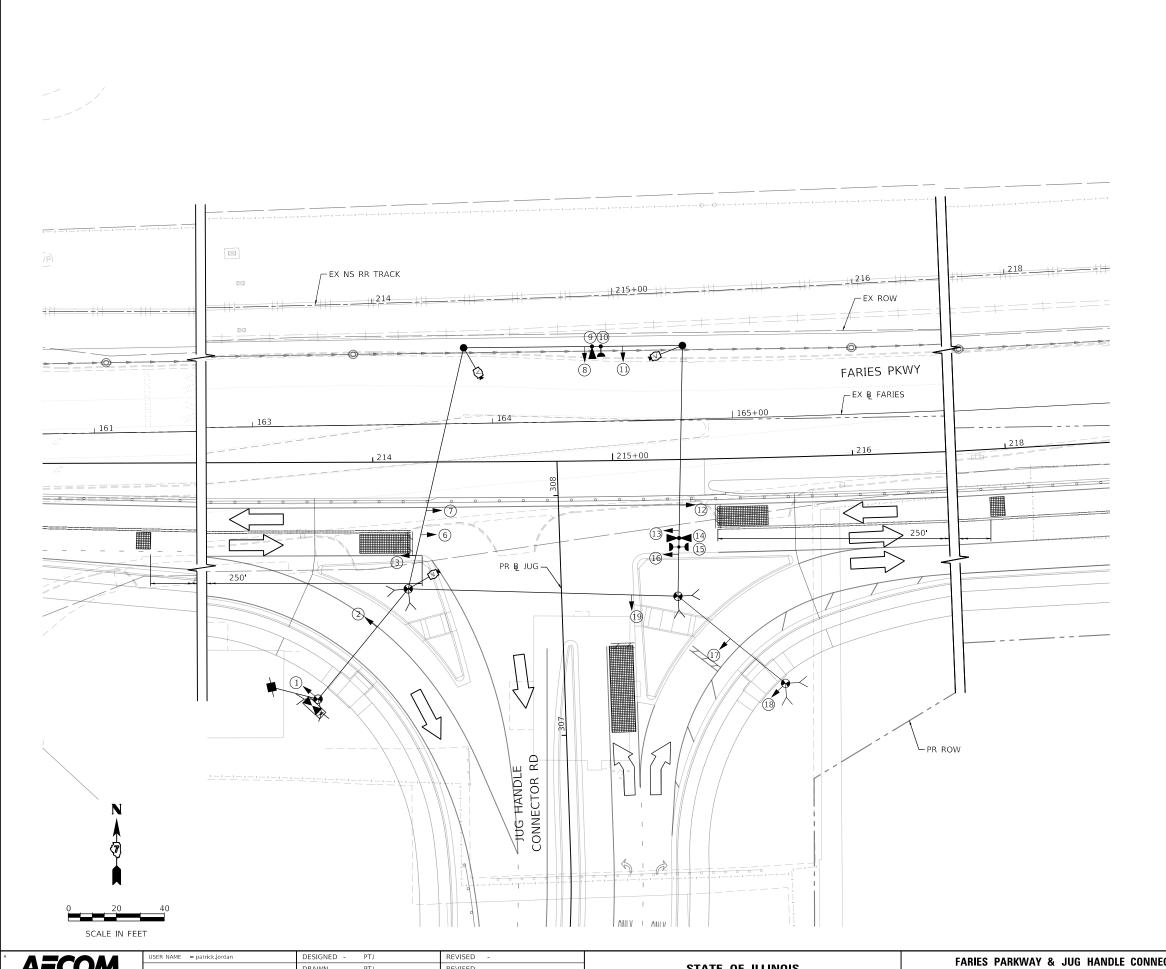

TEMPORARY TRAFFIC SIGNAL LEGEND

→ SIGNAL HEAD WITHOUT BACKPLATE

CONDUIT

■- SERVICE POLE

■ CONTROLLER

UNINTERRUPTABLE POWER SUPPLY

VIDEO DETECTION CAMERA

PEDESTRIAN PUSH BUTTON
PEDESTRIAN SIGNAL HEAD

← CONFIRMATION BEACON

EMERGENCY VEHICLE LIGHT DETECTOR

VIDEO DETECTION ZONE

R" REMOVE ITEN

TEMPORARY SPAN WIRE, TETHER WIRE, AND CABLE

→ GUY WI

□ 5

--- AERIAL CABLE

PROPOSED MAST ARM POLE

NOTES

- ADJUST WESTBOUND DETECTION ZONES AND LOCATIONS OF SIGNAL HEADS 6, 7, AND 12 TO ACCOMODATE THE SHIFT IN WESTBOUND APPROACH ALIGNMENT DURING STAGE 4C.
- 2. ADJUST LOCATION OF SIGNAL EQUIPMENT AND VIDEO DETECTION EQUIPMENT ON EXISTING MAST ARMS AND SIGNAL TRUSSES AS NEEDED IN COORDINATION WITH CONSTRUCTION AND MAINTENANCE OF TRAFFIC STAGING. THIS WORK IS TO BE INCLUDED IN THE "TEMPORARY TRAFFIC SIGNAL INSTALLATION" PAY ITEM.

AECOM


345 EAST ASH AVENUE
DECATUR, II. 69296


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FARIES PARKWAY & JUG HANDLE CONNECTOR ROAD

TEMPORARY TRAFFIC SIGNAL PLAN - STAGE 4B AND 4C

SCALE: 1"=20" SHEET 13 OF 15 SHEETS STA. TO STA.

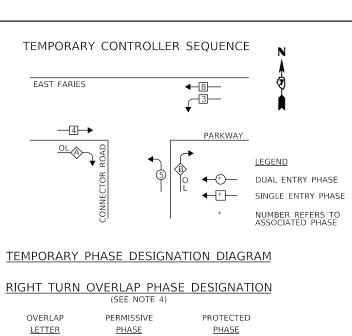


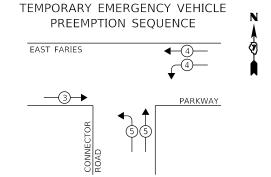

TEMPORARY EM	IERGENCY V	EHICLE PRE	EMPTOR
EMERGENCY VEHICLE PREEMPTOR	3	4	5
MOVEMENT		-	1

T ELEC	TOTAL WATTAGE				
TYPE	NO. OF LAMPS	WAT XINCAND	ΓAGE . LED ×	% OPERATION	
SIGNAL (RED)	15		17	0.50	127.50
(YELLOW)	15		25	0.25	93.75
(GREEN)	15		15	0.25	56.25
ARROW	4		12	0.10	4.80
PED. SIGNAL	0		25	1.00	0.00
CONTROLLER	1		300	1.00	300.00
VIDEO SYSTEM	1	150	-	1.00	150.00
UPS	1	-	25	1.00	25.00
ENERGY COSTS	TO:			TOTAL =	757.3

ENERGY SUPPLY: CONTACT: SHAWN SPILLMAN, SUPERVISOR
PHONE: (888) 659-4540
COMPANY: AMEREN ILLINOIS

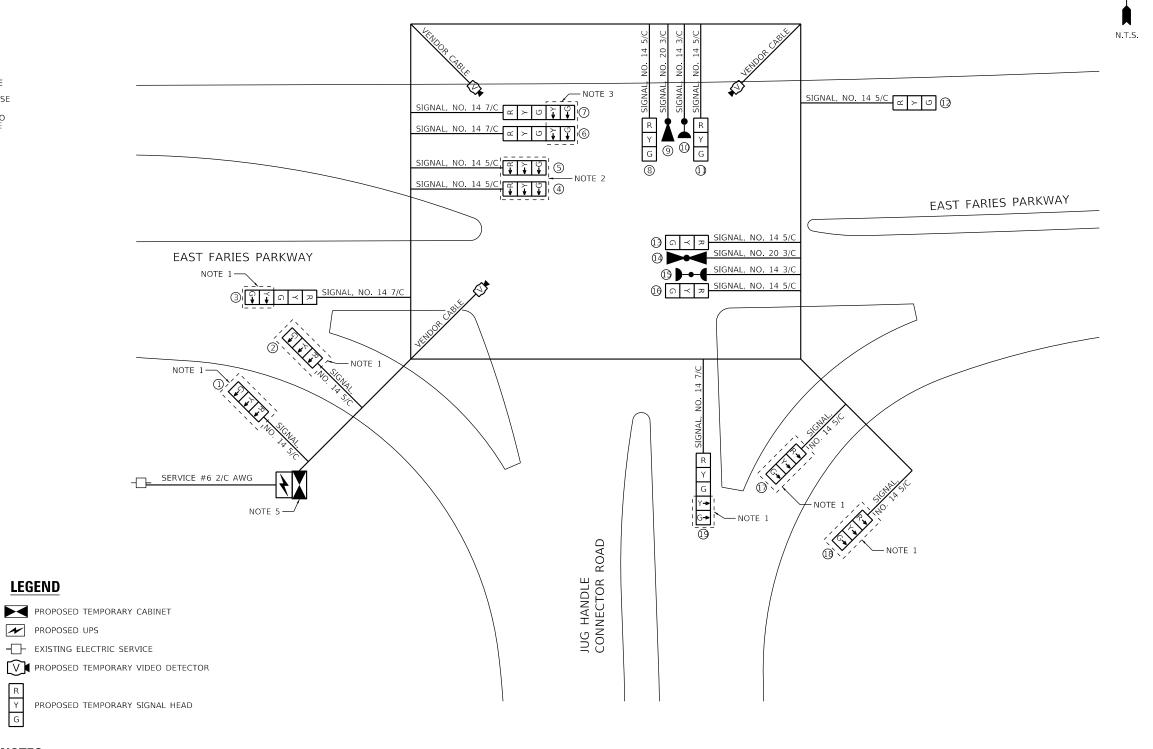

NOTES

G

- 1. BAG AND DE-ENERGIZE DURING STAGES 3A AND 3B. ENERGIZE DURING STAGES 4A, 4B, AND 4C.
- 2. BAG AND DE-ENERGIZE DURING STAGES 4B AND 4C. ENERGIZE DURING STAGES 3A, 3B, AND 4A.
- 3. BAG AND DE-ENERGIZE DURING STAGES 3A, 3B, AND 4A. ENERGIZE DURING STAGES 4B AND 4C.
- 4. OVERLAP A AND B SHALL ONLY BE IN OPERATION DURING STAGES 4A, 4B, AND 4C.
- 5. SEE SHEET 717 FOR TEMPORARY SIGNAL CONTROLLER SUPPORT PLATFORM DETAIL.

REVISED REVISED REVISED REVISED


A = CO A A	USER NAME = patrick.jordan	DESIGNE) -	PTJ
AECOM		DRAWN	-	PTJ
845 EAST ASH AVENUE	PLOT SCALE = 2.0000 ' / in.	CHECKED	-	MJL
DECATUR, IL 62526 PHONE: (217) 775-6065	PLOT DATE = 4/28/2021	DATE	-	4/30/2021


	STATE	OF	FILLINOIS	
DEF	PARTMENT	0F	TRANSPORTATIO	Ν

FARIES PARKWAY & JUG HANDLE CONNECTOR ROAD							F.A.U. RTE	SECT	ION		
TEMPORARY	TEMPORARY TRAFFIC SIGNAL CABLE PLAN - STAGES 3A TO 4C						7448	09-00933	-01-BR		
I LIVII OIIAII	1 1117		Oldiv	^_	OADLL	I LAN	- 01AGE0 3A 10 40				
LE: N.T.S.	SHEET	14	OF	15	SHEETS	STA.	TO STA.			ILLINO1S	F

F.A.U. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
7448	09-00933-01-BR	MACON	1019	719	
			CONTRA	CT NO.	95893
	ILLINOIS	FED. All	D PROJECT		

CITY OF DECATUR

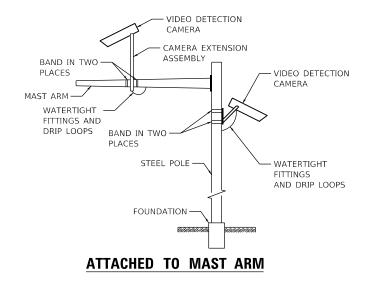

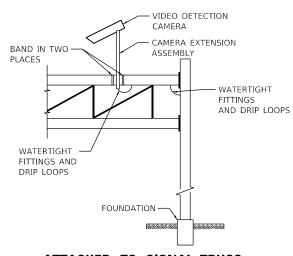


ATTACHED TO SIGNAL TRUSS

SPAN WIRE ATTACHED TO PROPOSED SIGNAL POLE

(NOT TO SCALE) BRACKET TETHER WIRE SIGNAL HEAD STEEL POLE -FOUNDATION -50000000

TEMPORARY SIGNAL CONTROLLER WOOD SUPPORT PLATFORM

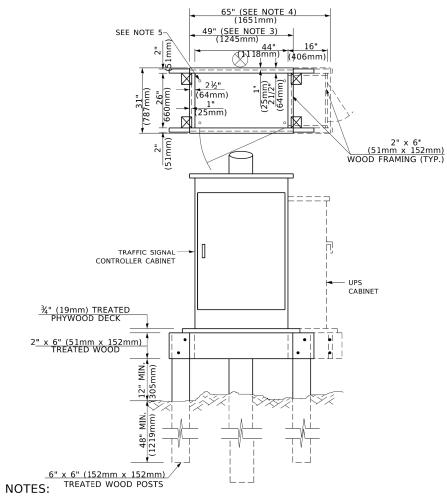

- BASED ON CONTROLLER CABINET TYPE IV WITH BASE DIMENSIONS OF 26" x 44" (660mm x 1118mm).
 ADJUST PLATFORM SIZE TO FIT CABINET BASE DIMENSIONS BEING SUPPLIED
- BASED ON UNINTERRUPTIBLE POWER SUPPLY CABINET WITH BASE DIMENSIONS OF 16" x 25" (406mm x 635mm).
 ADJUST PLATFORM SIZE TO FIT CABINET BASE DIMENSIONS BEING SUPPLIED.
- 3. PLATFORM SIZE FOR CONTROLLER CABINET TYPE IV.
- 4. PLATFORM SIZE FOR CONTROLLER CABINET TYPE IV AND UNINTERRUPTIBLE POWER SUPPLY CABINET.
- 5. DRILLED HOLES THROUGH THE PLATFORM BASE TO MATCH THE CONTROLLER CABINET BOLT TEMPLATE. FASTEN THE CONTROLLER CABINET TO THE PLATFORM WITH CARRIAGE BOLTS, WASHERS AND NUTS.
- 6. FASTEN ALL SUPPORT WOOD FRAMING TO THE WOOD POSTS WITH 2 LAG SCREWS FOR EACH CONNECTION.

USER NAME = patrick.jordan	DESIGNED - PTJ	REVISED -	
	DRAWN - PTJ	REVISED -	
PLOT SCALE = 2.0000 ' / in.	CHECKED - MJL	REVISED -	
PLOT DATE = 4/28/2021	DATE - 4/30/2021	REVISED -	

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

								F.A.U. RTE				COUNTY	TOTAL SHEETS	SHEET NO.
IE	TEMPORARY TRAFFIC SIGNAL PLAN DETAILS						7448	09-00933-01-BR			MACON	1019	720	
												CONTRA	ACT NO.	95893
- 1 :	SHEET	15	OF	15	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT						

SCALE: N.T.S.

ELECTRICAL GENERAL NOTES

- 1. ALL SIGNAL HEADS SHALL HAVE 12" SECTIONS. MOUNTING HARDWARE SHALL BE UNPAINTED ALUMINUM. ALL BOLTS, SCREWS, NUTS AND WASHERS SHALL BE STAINLESS STEEL. ANTI-SEIZE PAST COMPOUND SHALL BE USED ON ALL MOUNTING HARDWARE
- 2. BACK PLATES SHALL BE ABS PLASTIC WITH REFLECTORIZED BORDER.
- 3. THE LOCATION OF MAST ARM SUPPORTS SHALL BE APPROVED BY THE ENGINEER BEFORE FOUNDATIONS ARE CONSTRUCTED. MAST ARM POLES SHALL BE LOCATED A MINIMUM OF 10 FEET FROM THE EDGE OF PAVEMENT OR 2 FEET FROM THE EDGE OF SHOULDER, WHICHEVER DISTANCE IS GREATER. IN CURBED SECTION, THE MAST ARM POLES SHALL BE LOCATED A MINIMUM OF 5 FEET FROM THE FACE OF THE CURB. THESE DISTANCES ARE TO THE NEAR FACE OF THE MAST ARM POLE.
- 4. ALL TRAFFIC SIGNAL CABLES SHALL BE #14 A.W.G. STRANDED COPPER UNLESS OTHERWISE SPECIFIED.
- 5. ALL HANDHOLE'S SHALL BE CAST-IN-PLACE PORTLAND CEMENT CONCRETE (PER ARTICLE 814.03). THE CAST-IN-PLACE LEGEND IN THE COVER SHALL BE "TRAFFIC SIGNALS".
- 6. SLOPE HANDHOLE COVERS TO MATCH PROPOSED GRADE ELEVATIONS.
- 7. MAST ARM FOUNDATION DEPTHS SHOWN ARE APPROXIMATE. THE ENGINEER WILL PROVIDE SOIL BORINGS TO DETERMINE ACTUAL MAST ARM FOUNDATION DEPTHS. THE CONTRACTOR SHALL VERIFY REQUIRED DEPTHS PRIOR TO STEEL FABRICATION AND CONSTRUCTION OF CONCRETE FOUNDATIONS.
- 8. CENTER TO CENTER DISTANCE BETWEEN THE CONDUITS, WHERE TWO OR MORE LOOP LEAD-IN CONDUITS ARE INSTALLED FROM THE EDGE OF THE PAVEMENT TO THE NEAREST HANDHOLE, SHALL BE SIX INCHES MINIMUM AT THE EDGE OF PAVEMENT.
- 9. THERE SHALL BE FOUR (4) GROUND RODS IN THE CONTROLLER CABINET. GROUND WIRES SHALL BE TYPE XLP, NO. 6 A.W.G., STRANDED COPPER, GREEN COLOR CODED AND IN ACCORDANCE WITH STANDARD 873001 AND SECTION 873 OF THE STANDARD
- 10. CONDUIT SPLICES WILL NOT BE PAID FOR SEPARATELY, BUT SHALL BE CONSIDERED PART OF THE NEW CONDUIT INSTALLATION.
- 11. THE LOCATION OF SIGNAL HEADS ON MAST ARMS SHALL BE APPROVED BY THE ENGINEER BEFORE MAST ARMS ARE INSTALLED.
- 12. ALL UTILITIES SHALL BE LOCATED IN THE FIELD PRIOR TO ANY ATTEMPT TO CONSTRUCT ANY COMPONENT OF THE VARIOUS TRAFFIC SIGNAL INSTALLATIONS. AGENCIES KNOWN TO HAVE FACILITIES WITHIN THE LIMITS OF THIS IMPROVEMENT ARE THE FOLLOWING:

SANITARY SEWER:

SANITARY DISTRICT OF DECATUR UTILITIES OR CITY OF DECATUR UTILITIES ONE GARY K. ANDERSON PLAZA DECATUR, ILLINOIS 62523 (217) 422-6931 X216

WATER:

CITY OF DECATUR UTILITIES ONE GARY K. ANDERSON PLAZA DECATUR, ILLINOIS 62523 (217) 424-2747

COMMUNICATIONS:

1000 COMMERCE DRIVE, FLOOR 1 OAK BROOK, ILLINOIS 60523 (630) 573-6414

COMCAST (224) 229-5862

METRO COMMUNICATION 8 SOUTH WASHINGTON STREET SULLIVAN, ILLINOIS 61951 (217)-728-3605

STORM SEWER:

CITY OF DECATUR UTILITIES ONE GARY K. ANDERSON PLAZA DECATUR, ILLINOIS 62523 (217) 424-2747

ELECTRIC AND GAS:

AMEREN ELECTRIC TRANSMISSION 370 S. MAIN STREET (MC: C-25) DECATUR, ILLINOIS 62523 (800) 755-5000 OR (217)-424-6430

AMEREN GAS DISTRIBUTION & AMEREN ELECTRIC DISTRIBUTION 2460 N. JASPER STREET DECATUR, ILLINOIS 62526 (217)-424-8745

AMEREN GAS TRANSMISSION 370 S. MAIN STREET DECATUR, ILLINOIS 62521 (217)-424-8278

AMEREN IP SOUTH COLLINSVILLE, ILLINOIS 62234 618-301-5327

CITY OF DECATUR UTILITIES ONE GARY K. ANDERSON PLAZA DECATUR, ILLINOIS 62523 (217) 424-2747

THE LOCATION OF EXISTING UTILITIES AS SHOWN ON THE PLANS HAVE BEEN LOCATED AT THE TIME OF SURVEY, OR BASED ON AVAILABLE EXISTING INFORMATION. NO GUARANTEE IS IMPLIED THAT ALL UTILITIES HAVE BEEN LOCATED OR DEPICTED ON THE PLANS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR VERIFYING THE EXACT LOCATION OF ALL UTILITIES. IT MAY BE NECESSARY TO HAND DIG TEST HOLES TO EXPOSE EXISTING UTILITIES AT SOME LOCATIONS.




24" X 30" 0

FURNISH & INSTALL EIGHT (8) EACH SIGN


DETAIL OF SIGN PANEL - TYPE 1

(NOT TO SCALE)

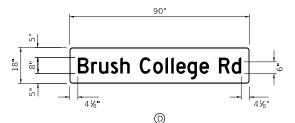

FURNISH & INSTALL ONE (1) EACH SIGN DETAIL OF SIGN PANEL - TYPE 2

(NOT TO SCALE)

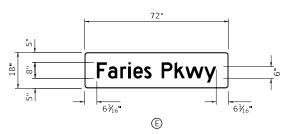

FURNISH & INSTALL ONE (1) EACH SIGN DETAIL OF SIGN PANEL - TYPE 1 (NOT TO SCALE)



9" X 15"

FURNISH & INSTALL EIGHT (8) EACH SIGN

FURNISH & INSTALL FOUR (4) EACH SIGN

DETAIL OF SIGN PANEL - TYPE 1 (NOT TO SCALE)



USER NAME = rjo	DESIGNED -	LDC	REVISED -
	DRAWN -	RJO	REVISED -
PLOT SCALE = 2.0000 / in.	CHECKED -	LDC	REVISED -
PLOT DATE = 4/27/2021	DATE -	4/30/2021	REVISED -

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

В	RUSH	COLL	EGE	RO	AD &	F.A.U. SECTION			COUNTY			
D/	\FFIC •	SICN/	\I E	N A I	NOTE	7448	09-0093	MACON				
1117	RAFFIC SIGNAL PLAN NOTES AND QUANTITIES											CONTRA
	SHEET	1	OF	10	SHEETS	STA.	TO STA.			ILLINOIS	FED. All	D PROJECT

	TRAFFIC SIGNAL QUANT	ITIES	;
CODE NO.	ITEM	UNIT	TOTAL QUANTITIES
72000100	SIGN PANEL - TYPE 1	SQFT	61
72000200	SIGN PANEL - TYPE 2	SQFT	12
73303000	OVERHEAD SIGN STRUCTURE - MONOTUBE	FOOT	91.1
73400200	DRILLED SHAFT CONCRETE FOUNDATIONS	CUYD	14.7
80500100	SERVICE INSTALLATION. TYPE A	EACH	2
	UNDERGROUND CONDUIT, PVC, 2" DIA.	FOOT	575
	UNDERGROUND CONDUIT, PVC, 3" DIA.	FOOT	258
	UNDERGROUND CONDUIT, PVC, 4" DIA.	FOOT	228
	UNDERGROUND CONDUIT, PVC. 5" DIA.	FOOT	128
	HANDHOLE	EACH	10
	DOUBLE HANDHOLE	EACH	2
	FULL-ACTUATED CONTROLLER AND TYPE IV CABINET	EACH	2
	UNINTERRUPTABLE POWER SUPPLY, STANDARD	EACH	2
	ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 3C	FOOT	4.409
	ELECTRIC CABLE IN CONDUIT, SIGNAL NO. 14 5C	FOOT	9.066
	ELECTRIC CABLE IN CONDUIT, SERVICE, NO. 6 2 C	FOOT	32
87301900	ELECTRIC CABLE IN CONDUIT, EQUIPMENT GROUNDING CONDUCTOR, NO. 6 1C	FOOT	1,712
87501000	TRAFFIC SIGNAL POST, 14 FT.	EACH	9
	PEDESTRIAN PUSH-BUTTON POST, TYPE I	EACH	4
	STEEL MAST ARM ASSEMBLY AND POLE. 28 FT.	EACH	1
	STEEL COMBINATION MAST ARM ASSEMBLY AND POLE 40 FT.	EACH	1
	STEEL COMBINATION MAST ARM ASSEMBLY AND POLE 42 FT.	EACH	1
	STEEL COMBINATION MAST ARM ASSEMBLY AND POLE 44 FT.	EACH	1
	STEEL COMBINATION MAST ARM ASSEMBLY AND POLE 52 FT.	EACH	1
	CONCRETE FOUNDATION, TYPE A	FOOT	27
87800150	CONCRETE FOUNDATION, TYPE C	FOOT	6
87800415	CONCRETE FOUNDATION, TYPE E 36-INCH DIAMETER	FOOT	73
88040070	SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, 3-SECTION, BRACKET MOUNTED	EACH	16
88040090	SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, 3-SECTION, MAST ARM MOUNTED	EACH	16
88102825	PEDESTRIAN SIGNAL HEAD, POLYCARBONATE, LED, 1-FACE, BRACKET MOUNTED WITH COUNT DOWN TIMER	EACH	12
88200510	TRAFFIC SIGNAL BACKPLATE, RETROREFLECTIVE	EACH	16
88800100	PEDESTRIAN PUSH-BUTTON	EACH	12
X1400399	VIDEO DETECTION SYSTEM COMPLETE	EACH	2
			2

1019 721

	SCHEDULE OF POST & MAST ARM ASSEMBLIES														
	BRUSH COLLEGE ROAD AND CONNECTOR ROAD														
REF.	LOCATION	TYPE	LENGTH	FOUNDATION TYPE	FOUNDATION DEPTH	STATION OFFSET		BOLT CIRCLE	NO. ANCHOR RODS	ANCHOR ROD SIZE					
MA 1	NORTHWEST QUADRANT	S MAA & P	28.0 FT	DRILL SHAFT CONC FDN *	29.0 FT.	55+70.00	61.10 LT	18 IN.	4	1 3/4" x 7'					
TRUSS 1	SOUTHWEST QUADRANT &	NOH SN STR-MOTUBE		DRILL SHAFT CONC FDN *	26.0 FT.	54+91.53	56.52 LT								
100001	SOUTHEAST QUADRANT	OH SIN SIN-WOTOBE	91.1 FT	DRILL SHAFT CONC FDN *	14.0 FT.	34+31.33	34.58 RT								
TSP 2	SOUTHEAST QUADRANT	TS POST A 14		CONC FDN TY A	3.0 FT.	54+68.40	92.38 RT								
TSP 4	SOUTHEAST QUADRANT	TS POST A 14		CONC FDN TY A	3.0 FT.	54+96.23	68.41 RT								
MA 2	NORTHEAST QUANDRANT	STL COMB MAA&P	44.0 FT.	CONC FDN TYE 36D	13.0 FT.	55+98.34	49.78 RT	21 IN.	6	1 3/4" x 7'					
TSP 5	NORTHEAST QUANDRANT	TS POST A 14		CONC FDN TY A	3.0 FT.	56+35.03	55.29 RT								
PB 1	NORTHEAST QUANDRANT	PED PUSH-BUT POST T1				56+65.24	83.70 RT								
TSP 6	NORTHEAST QUANDRANT	TS POST A 14		CONC FDN TY A	3.0 FT.	56+75.86	87.69 RT								

^{*} NOTE: SEE SHEETS 7, 8, 9, & 10 OF 10 FOR DRILLED SHAFT CONCRETE FOUNDATION DETAILS.

SCHEDULE OF HANDHOLE QUANTITIES BRUSH COLLEGE ROAD AND CONNECTOR ROAD											
REF.	LOCATION	DESCRIPTION	STATION	OFFSET							
HH-12	NORTHWEST QUADRANT	HANDHOLE	55+60.00	62.00 LT							
HH-11	SOUTHWEST QUADRANT	HANDHOLE	55+00.00	58.00 LT							
HH-4	SOUTHEAST QUADRANT	HANDHOLE	54+60.30	82.13 RT							
HH-3	SOUTHEAST QUADRANT	HANDHOLE	55+02.91	78.96 RT							
HH-2	NORTHEAST QUADRANT	HANDHOLE	56+10.66	60.90 RT							
DHH-1	NORTHEAST QUADRANT	DOUBLE HANDHOLE	56+69.30	100.69 RT							

SCHEDULE OF SIGNAL HEAD QUANTITIES BRUSH COLLEGE ROAD AND CONNECTOR ROAD									
QTY.	UNIT	ITEM	SIGNAL#						
8	EACH	SH, P, LED, 1F, 3-SEC, BM	5,8,11,12,13,14,15,16						
8	EACH	SH, P, LED, 1F, 3-SEC, MAM	1,2,3,4,6,7,9,10						
8	EACH	TRAFFIC SIGNAL BACKPLATE, FORMED PLASTIC	1,2,3,4,6,7,9,10						
6	EACH	PED, SH, P, LED, 1F, BM CT							

	SCHEDULE OF POST & MAST ARM ASSEMBLIES FARIES PARKWAY AND CONNECTOR ROAD														
REF.	LOCATION TYPE		LENGTH	FOUNDATION TYPE	FOUNDATION DEPTH	STATION	OFFSET	BOLT CIRCLE	NO. ANCHOR RODS	ANCHOR ROD SIZE					
MA 3	NORTHWEST QUADRANT	STL COMB MAA&P	52.0 FT.	CONC FDN TY E 36D	25.0 FT.	214+38.04	47.50 LT	21 IN.	6	1 3/4" x 7'					
TSP 7 SOUTHWEST QUADRANT		TS POST A 14		CONC FDN TY A	3.0 FT.	213+86.52	100.60 RT								
PB 2 SOUTHWEST QUADRANT		PED PUSH-BUT POST T1				213+97.25	96.77 RT								
TSP 8	SOUTHWEST QUADRANT	TS POST A 14		CONC FDN TY A	3.0 FT.	214+18.10	47.61 RT								
TSP 9	SOUTHWEST QUADRANT	TS POST A 14		CONC FDN TY A	3.0 FT.	214+23.19	63.51 RT								
PB 3	SOUTHWEST QUADRANT	PED PUSH-BUT POST T1				214+30.07	72.51 RT								
MA 4	NORTHEAST QUADRANT	STL COMB MAA&P	42.0 FT.	CONC FDN TY E 36D	15.0 FT.	215+30.00	47.50 LT	21 IN.	6	1 3/4" x 7'					
TSP 10	SOUTHEAST QUADRANT	TS POST A 14		CONC FDN TY A	3.0 FT.	215+21.83	72.79 RT								
PB 4	PB 4 SOUTHEAST QUADRANT PED PUSH-BUT					215+61.18	86.09 RT								
TSP 11	TSP 11 SOUTHEAST QUADRANT TS POST A 14			CONC FDN TY A	3.0 FT.	215+64.83	96.98 RT								
MA 5	SOUTHEAST QUADRANT	STL COMB MAA&P	40.0 FT.	CONC FDN TY E 36D	20.0 FT.	215+21.22	60.90 RT	21 IN.	6	1 3/4" x 7'					


	SCHEDULE OF HANDHOLE QUANTITIES FARIES PARKWAY AND CONNECTOR ROAD												
REF.	LOCATION	DESCRIPTION	STATION	OFFSET									
DHH-5	SOUTHWEST QUADRANT	DOUBLE HANDHOLE	213+70.42	92.13 RT									
HH-6	SOUTHWEST QUADRANT	HANDHOLE	214+09.34	51.08 RT									
HH-7	SOUTHEAST QUADRANT	HANDHOLE	215+25.23	48.05 RT									
HH-8	SOUTHEAST QUADRANT	HANDHOLE	215+51.34	93.90 RT									
HH-9	NORTHWEST QUADRANT	HANDHOLE	214+09.34	43.50 LT									
HH-10	NORTHEAST QUADRANT	HANDHOLE	215+20.00	43.50 LT									

SCHEDULE OF SIGNAL HEAD QUANTITIES FARIES PARKWAY AND CONNECTOR ROAD											
QTY.	UNIT	ITEM	SIGNAL#								
8	EACH	SH, P, LED, 1F, 3-SEC, BM	21,24,27,28,29,30,31,32								
8	EACH	SH, P, LED, 1F, 3-SEC, MAM	17,18,19,20,22,23,25,26								
8	EACH	TRAFFIC SIGNAL BACKPLATE, FORMED PLASTIC	17,18,19,20,22,23,25,26								
6	EACH	PED, SH, P, LED, 1F, BM CT									

SCALE:

USER NAME = rjo	DESIGNED - LDC	REVISED -	
	DRAWN - RJO	REVISED -	
PLOT SCALE = 2.0000 ' / in.	CHECKED - LDC	REVISED -	
PLOT DATE = 4/27/2021	DATE - 4/30/2021	REVISED -	

В	RUSH COLL	F.A.U. RTE	SEC ⁻	ΓΙΟΝ		COUNTY	TOTAL SHEETS	SHEET NO.				
	TRAFFIC SIGNAL PLAN SCHEDULES						09-00933-01-BR			MACON	1019	722
	IIIAIII					CONTRA	ACT NO.	95893				
	SHEET 2	OF 10	SHEETS	STA.	TO STA.			ILLINOIS	FED. A	ID PROJECT		

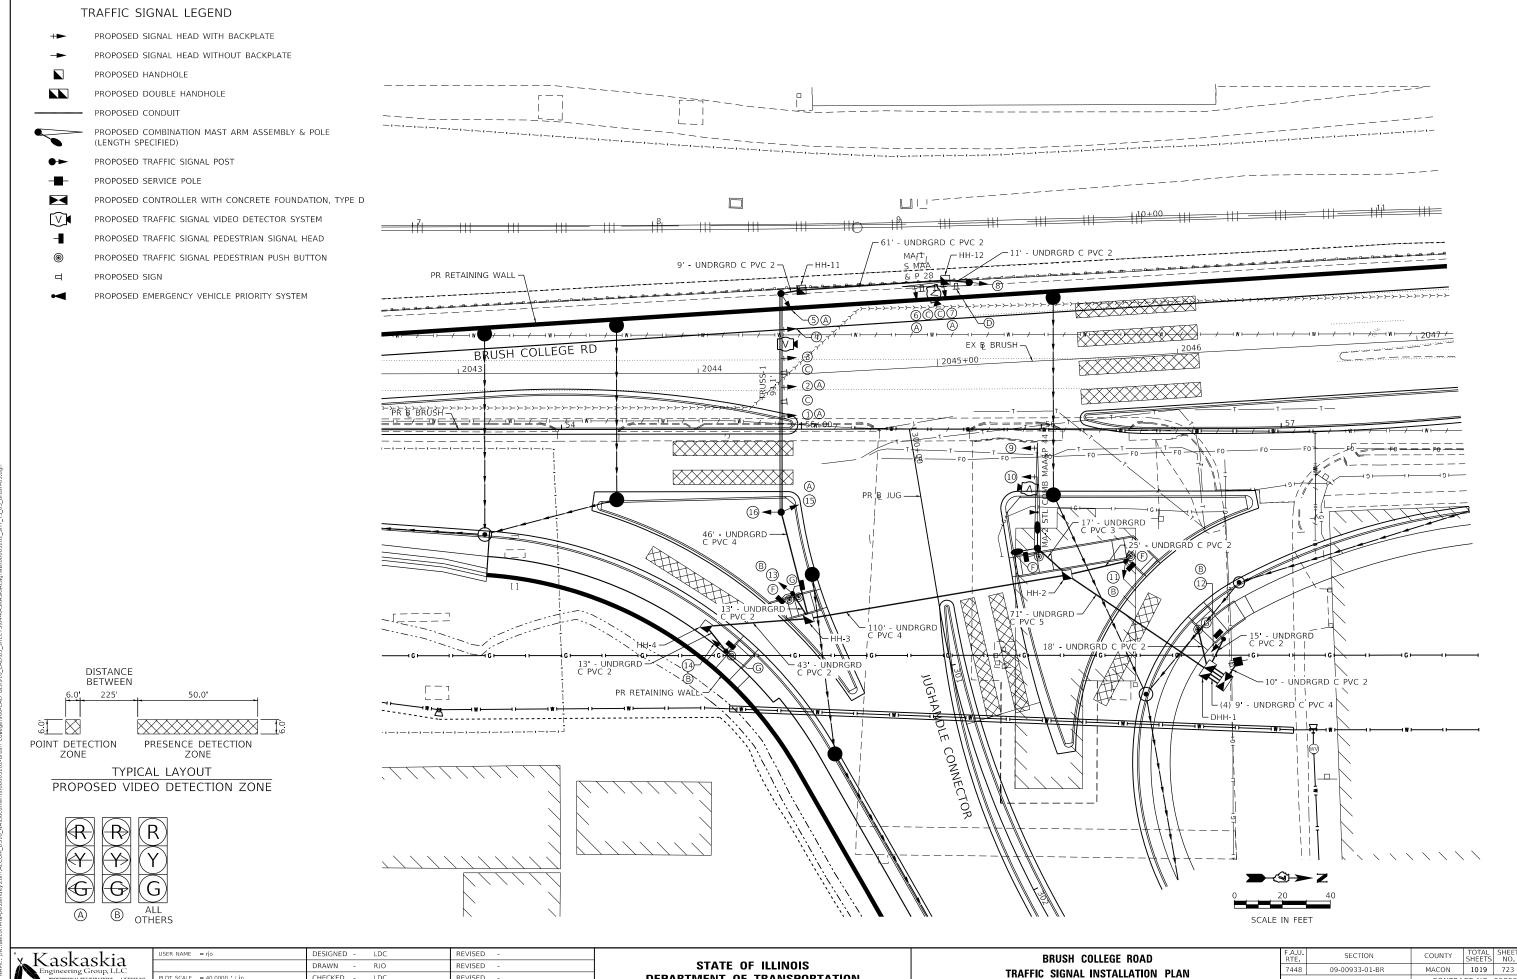

DEPARTMENT OF TRANSPORTATION

CONTRACT NO. 95893

SHEET 3 OF 10 SHEETS STA. 52+00.00 TO STA. 57+75.00

LOT SCALE = 40.0000 ' / in.

REVISED

PROPOSED SERVICE INSTALLATION

AMERICAN WIRE GAUGE (AWG) SIZE 14 CONDUCTORS (SEE GENERAL NOTES)

C.D. CALL DELAY (SEE GENERAL NOTES)

C.C.O. CALL CARRY OVER (SEE GENERAL NOTES)

CABLE SPLICE (SEE GENERAL NOTES)

TRAFFIC SIGNAL VIDEO DETECTOR SYSTEM

(PEDESTRIAN PUSH BUTTON **∱** 88 PEDESTRIAN SIGNAL HEAD


WITH COUNTDOWN DISPLAY EMERGENCY VEHICLE PRIORITY SYSTEM

-6 _1_

BRUSH COLLEGE ROAD

 $\bigcirc \blacksquare$

•




PHASE DESIGNATION DIAGRAM

SEQUENCE OF OPERATIONS

	FULL-ACTUATED CONTROLLER AND TYPE IV CABINET									
	PHASE Ø 1		2	3	3 4		6	7	8	
MOVEMENT		EB LT	 WB	NB LT	N/A	N/A	EB	N/A	N/A	
	ONCURRENT MOVEMENT PERMITTED	6 OR OLD	6	OLA			2			

PEDESTRIAN SIGNAL BY ACTUATION ONLY

GROUNDING #6 1/C AWG

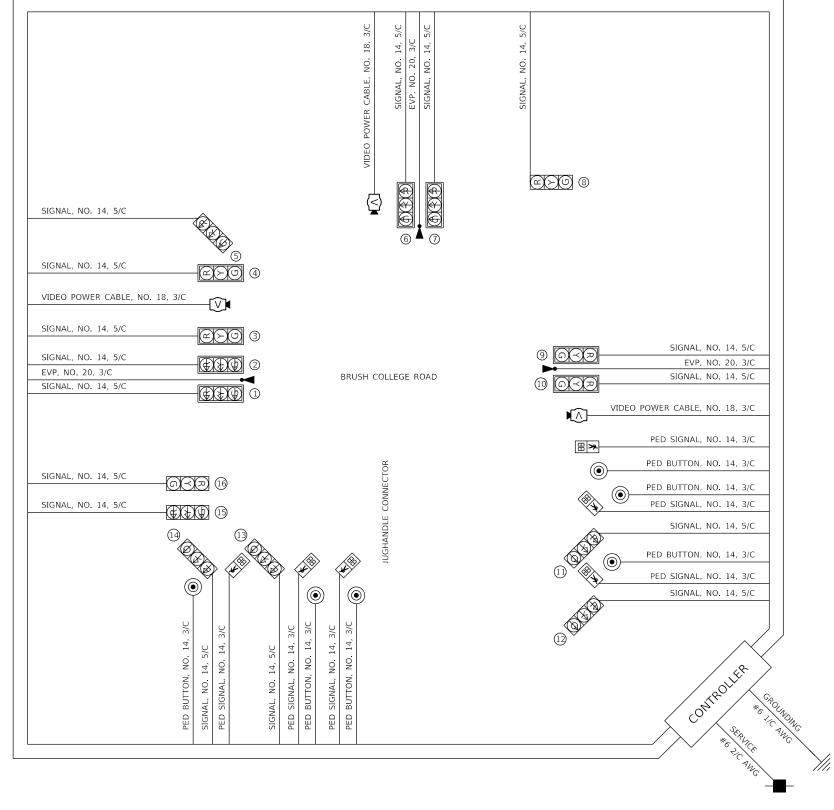

SCALE:


K	askaski ngineering Group, L	
7	PROFESSIONAL REGISTRATIONS	LICENSE NO.
,	Illinois Professional Design Firm	184.004773
	Professional Engineering Group	20-5080586

USER NAME = rjo	DESIGNED	-	LDC	REVISED	-
	DRAWN	-	RJO	REVISED	=
PLOT SCALE = 40.0000 / in.	CHECKED	-	LDC	REVISED	-
PLOT DATE = 4/27/2021	DATE	-	4/30/2021	REVISED	-

	BRUS	Н	COLLEGE	ROA	D	F.A.U. RTE	SECTION
TRAFFIC	SIGN	ΛI	DIANI ('ARIF	DIAGRAM	7448	09-00933-01-BF
IIIAIIIU	JIGIN		ILAN	ADLL	DIAGNAM		
SHEET 4	OF	10	SHEETS	STA	TO STA.		II LINOIS

→③→ Z

COUNTY MACON 1019 724 CONTRACT NO. 95893

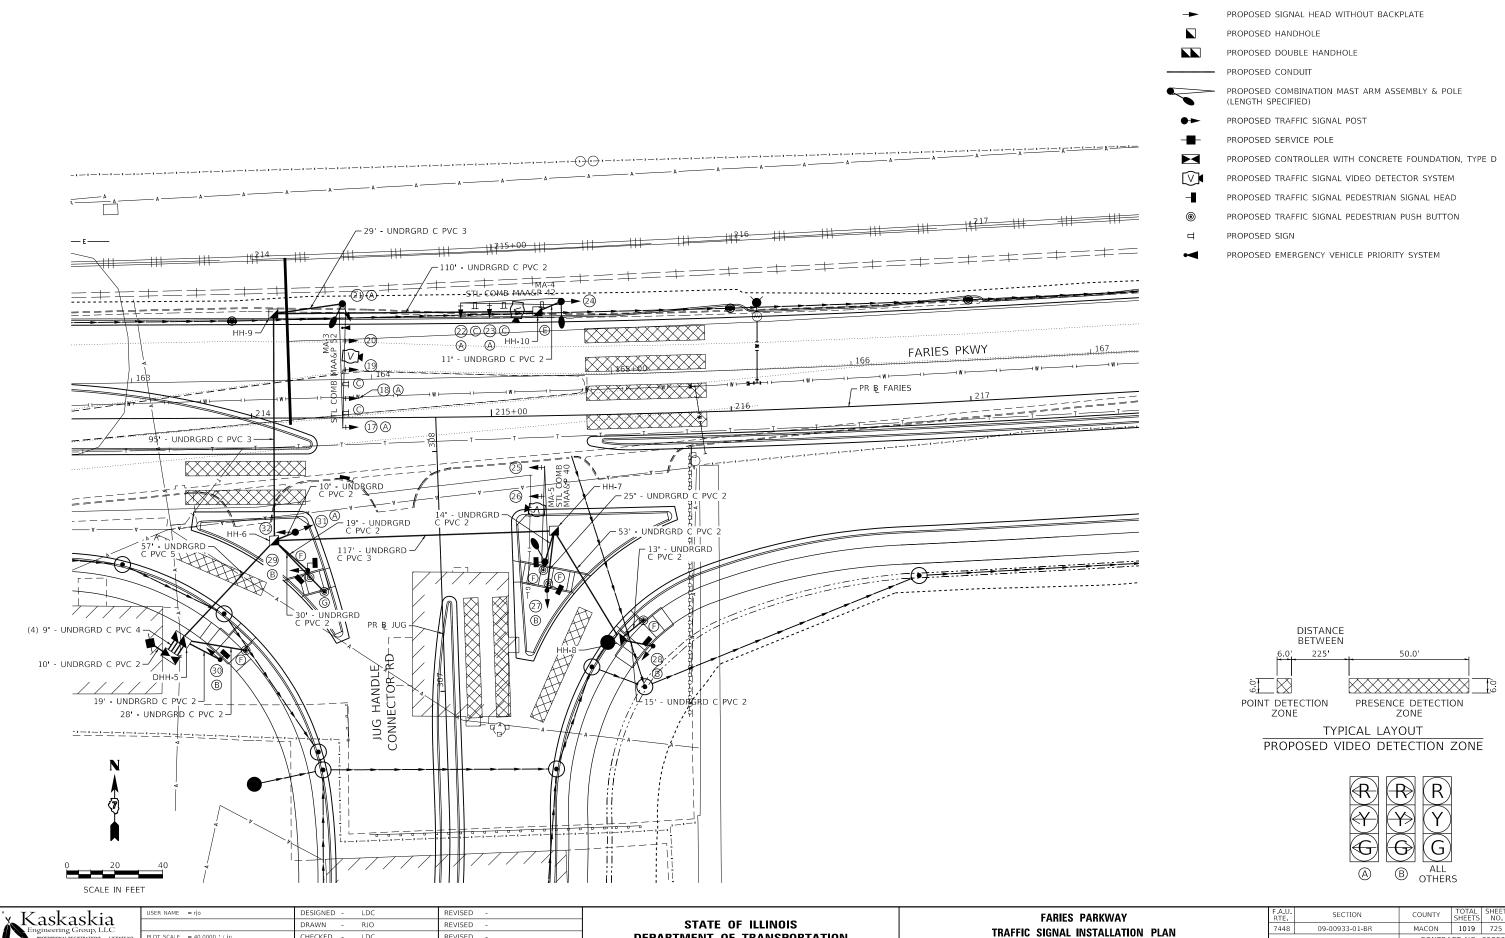

DEPARTMENT OF TRANSPORTATION

REVISED

TRAFFIC SIGNAL LEGEND

PROPOSED SIGNAL HEAD WITH BACKPLATE

CONTRACT NO. 95893

SHEET 5 OF 10 SHEETS STA. 213+25.00 TO STA. 219+00.00

PROPOSED SERVICE INSTALLATION

AMERICAN WIRE GAUGE (AWG) SIZE 14 CONDUCTORS (SEE GENERAL NOTES)

C.D. CALL DELAY (SEE GENERAL NOTES)

C.C.O. CALL CARRY OVER (SEE GENERAL NOTES)

CABLE SPLICE (SEE GENERAL NOTES) $\bigcirc \blacksquare$

TRAFFIC SIGNAL VIDEO DETECTOR SYSTEM

(

∱ 88


PEDESTRIAN PUSH BUTTON

PEDESTRIAN SIGNAL HEAD WITH COUNTDOWN DISPLAY

EMERGENCY VEHICLE PRIORITY SYSTEM

-8-

FARIES PARKWAY



PHASE DESIGNATION DIAGRAM

SEQUENCE OF OPERATIONS

	FULL-ACTUATED CONTROLLER AND TYPE IV CABINET										
PHASE Ø	1	2	3	4	5	6	7	8			
MOVEMENT	N/A	N/A	NB LT	SB	WB LT	N/A	N/A	NB			
CONCURRENT MOVEMENT PERMITTED			OLA	8	OLB			3			

PEDESTRIAN SIGNAL BY ACTUATION ONLY

DESIGNED -LDC REVISED DRAWN RJO REVISED LOT SCALE = 40.0000 ' / in. CHECKED LDC REVISED LOT DATE = 4/27/2021 REVISED DATE 4/30/2021

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

(**1**3)

GROUNDING #6 1/C AWG

SIGNAL, NO. 14, 5/C

EVP, NO. 20, 3/C

VIDEO POWER CABLE, NO. 18, 3/C

FARIES PARKWAY TRAFFIC SIGNAL PLAN CABLE DIAGRAM SHEET 6 OF 10 SHEETS STA.

SECTION COUNTY 7448 09-00933-01-BR MACON 1019 726 CONTRACT NO. 95893

SIGNAL, NO. 14, 5/C - OKO 32 PED BUTTON, NO. 14, 3/C SIGNAL, NO. 14, 5/C **(**

SCALE:

FARIES PARKWAY

PED SIGNAL, NO. 14, 3/C SIGNAL, NO. 14, 5/C PED BUTTON, NO. 14, 3/C PED SIGNAL, NO. 14, 3/C SIGNAL, NO. 14, 5/C

SIGNAL, NO. 14, 5/C

SIGNAL, NO. 14, 5/C

PED SIGNAL, NO. 14, 3/C

PED BUTTON, NO. 14, 3/C

VIDEO POWER CABLE, NO. 18, 3/C

EVP, NO. 20, 3/C


25 037

29 N3/2

出 >>

N

Kaskaskia

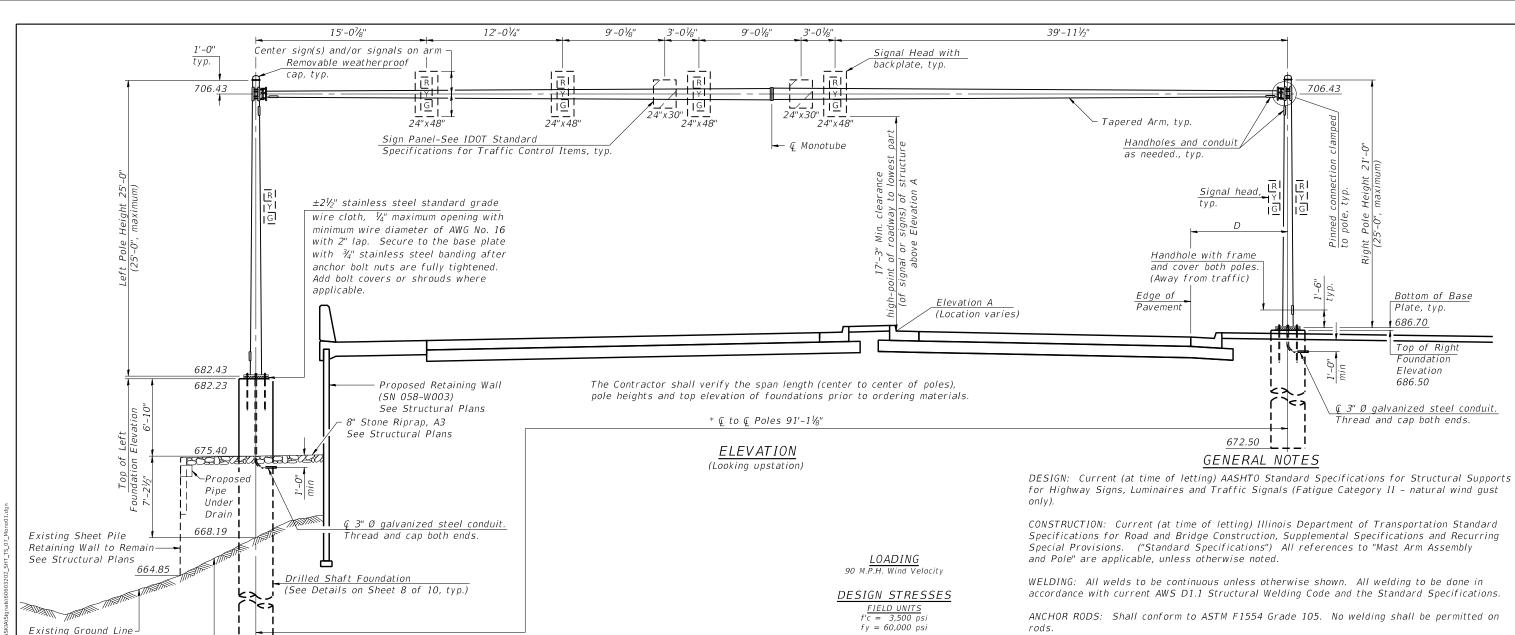

BILL OF MATERIAL

ITEM	UNIT	TOTAL
OVERHEAD SIGN STRUCTURE MONOTUBE SINGLE	Foot	91.1
DRILLED SHAFT CONCRETE FOUNDATIONS	Cu. Yds.	9.4

SIGN STRUCTURE DATA TABLE

FASTENERS: All connection bolts shall be High Strength Bolts M164, Galvanize M232 (A153), Type 3, or stainless steel heavy hex conforming to ASTM A193, Grade B8 or B8M, Class 1. U-bolts shall be produced from ASTM A276 Type 304, 304L, 316 or 316L, Condition A, cold finished, or an equivalent material acceptable to the Engineer. Nuts for stainless steel bolts shall be stainless steel conforming to ASTM A194, Grade 8 (AISI Type 304) or Grade 8F (AISI Type 303). All nuts shall be "locknuts" with nylon or steel inserts and semifinished hexagonal heads equivalent to the finished heavy hex series of the American National Standard. Washers for stainless steel bolts shall be stainless steel conforming to ASTM A240, Type

REINFORCEMENT BARS: Reinforcement Bars designated (E) shall be epoxy coated in accordance with the Standard Specifications.

CAMBER: Minimum AASHTO camber = L / 1000 + dead load camber.

FOUNDATIONS: The contract unit price for Drilled Shaft Concrete Foundations shall include reinforcement bars complete in place.

SIGNS AND SIGNALS: See sheets 1 thru 4 of 10 for details of proposed signs and signals.

* Due to non-standard monotube, Contractor/fabricator is to required to submit shop drawings

						<u> 51011</u>	1 31 NOCTO	NL DATA	TABLE				and des	sign sealed by	an IL license .	SE.
Ct. 1		C to C	E1 1:		Actual			Left Foundatio	n				Right F	oundation		Class SI
Structure Number	Station	ų to ų Poles	Elevation A	Dimension D	Sign/Signal Area	Elevation Top	Elev. Bottom	А	В	F	Elevation Top	Elev. Bottom	А	В	F	Concrete (Cu. Yds.)
7M058LBRUR001.0	54+91.53	91'-11/8"	686.43	8'-7"	42 Sq Ft	682.23	656.23	14'-0"	12'-0"	26'-0"	686.50	672.50	31/4"	13'-8¾"	14'-0"	9.4
I .																

K Er	askaski ngineering Group, L	
	PROFESSIONAL REGISTRATIONS	LICENSE NO.
<i>*</i>	Illinois Professional Design Firm	184.004773
₹	Professional Engineering Group	20-5080586

Future Grade Line-

By Others


656.23

	USER NAME = rjo	DESIGNED -	MLC	REVISED -	
		DRAWN -	RJO	REVISED -	
0.	PLOT SCALE = 2.0000 ' / in.	CHECKED -	JW	REVISED -	
	PLOT DATE = 4/27/2021	DATE -	4/30/2021	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCALE:

MONOTURE CICAL CERTIFICATION								SECTION		COUNTY	TOTAL SHEETS	SHEET NO.
MONOTUBE SIGN STRUCTURE						7448	09-00933-0	01-BR	MACON	1019	727	
										CONTRA	CT NO.	95893
SHEET	7	OF	10	SHEETS	STA.	TO STA.		IL	LINOIS FED.	. AID PROJECT		

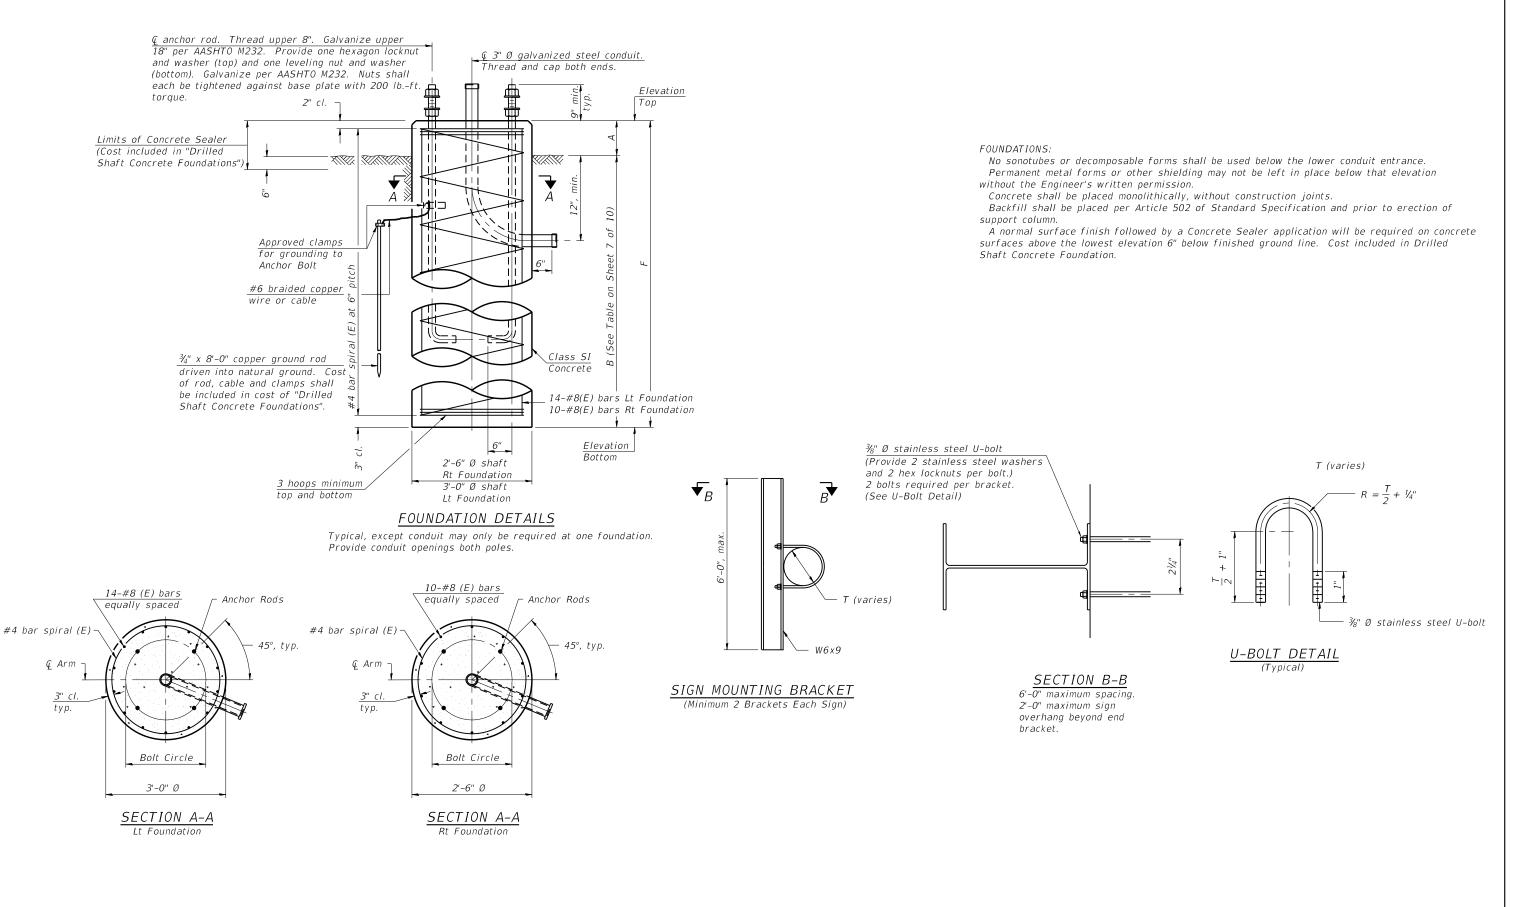

NOTE:

SCALE:


See Standard Plan 880006.01 Traffic Signal Mounting Details for signal head mounting details.



	USER NAME = rjo	DESIGNED -	MLC	REVISED -
		DRAWN -	RJO	REVISED -
_	PLOT SCALE = 2.0000 ' / in.	CHECKED -	JW	REVISED -
	PLOT DATE = 4/27/2021	DATE -	4/30/2021	REVISED -

MONOTUBE	MONOTUBE SIGN STRUCTURE					NC		COUNTY	TOTAL SHEETS	SHEET NO.
FOUNDATION AND SIGN BRACKETS				7448 09-00933-01-BR		MACON	1019	728		
FUUNDATION AND SIGN BRACKETS								CONTRA	CT NO.	95893
SHEET 8 OF 10	SHEETS	STA.	TO STA.	ILLINOIS FED. A			FED. AII	D PROJECT		

SHEET NO.

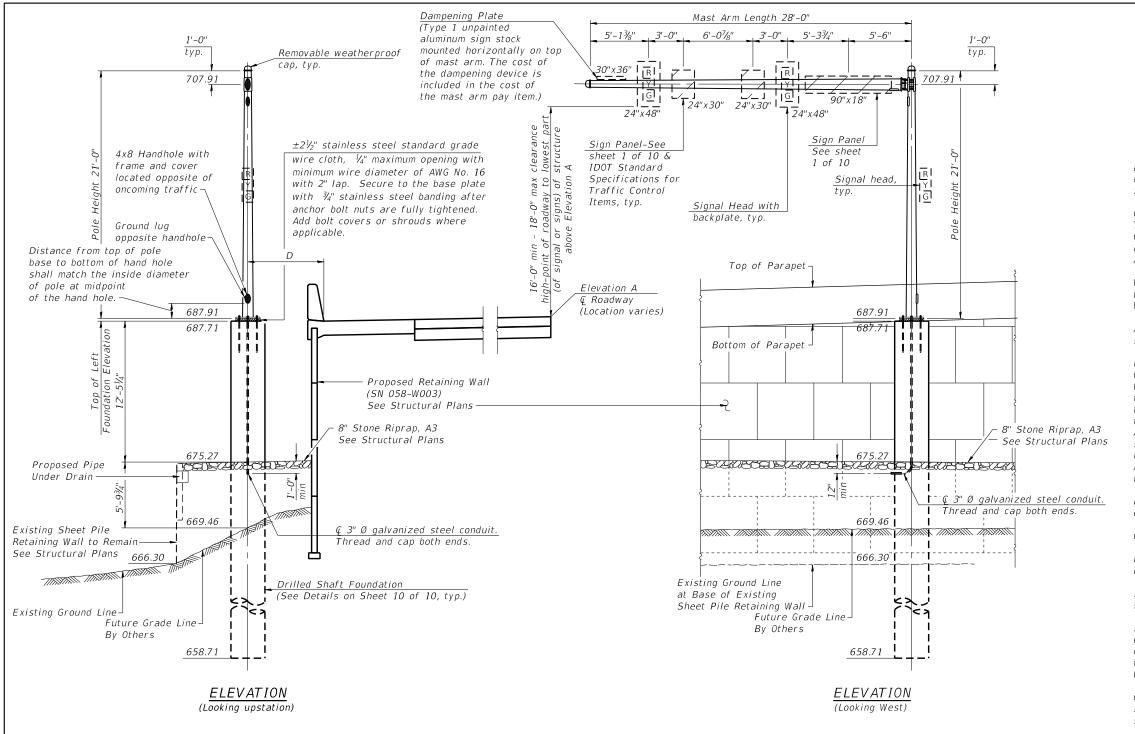

GENERAL NOTES

DESIGN: Current (at time of letting) AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals (Fatigue Category II – natural wind gust only).

CONSTRUCTION: Current (at time of letting) Illinois Department of Transportation Standard Specifications for Road and Bridge Construction, Supplemental Specifications and Recurring Special Provisions. ("Standard Specifications") All references to "Mast Arm Assembly and Pole" are applicable, unless otherwise noted.

WELDING: All welds to be continuous unless otherwise shown. All welding to be done in accordance with current AWS D1.1 Structural Welding Code and the Standard Specifications.

ANCHOR RODS: Shall conform to ASTM F1554 Grade 105. No welding shall be permitted on rods.

FASTENERS: All connection bolts shall be High Strength Bolts M164, Galvanize M232 (A153), Type 3, or stainless steel heavy hex conforming to ASTM A193, Grade B8 or B8M, Class 1. U-bolts shall be produced from ASTM A276 Type 304, 304L, 316 or 316L, Condition A, cold finished, or an equivalent material acceptable to the Engineer. Nuts for stainless steel bolts shall be stainless steel conforming to ASTM A194, Grade 8 (AISI Type 304) or Grade 8F (AISI Type 303). All nuts shall be "locknuts" with nylon or steel inserts and semifinished hexagonal heads equivalent to the finished heavy hex series of the American National Standard. Washers for stainless steel bolts shall be stainless steel conforming to ASTM A240, Type 302 or 304.

REINFORCEMENT BARS: Reinforcement Bars designated (E) shall be epoxy coated in accordance with the Standard Specifications.

CAMBER: Minimum AASHTO camber = L / 1000 + dead load camber.

FOUNDATIONS: The contract unit price for Drilled Shaft Concrete Foundations shall include reinforcement bars complete in place.

SIGNS AND SIGNALS: See sheets 1 thru 4 of 10 for details of proposed signs and signals.

SIGN SUPPORT STRUCTURES: Sign support structures may be subject to damaging vibrations and oscillations when sign panels are not in place during erection or maintenance of the structure. To avoid these vibrations and oscillations, consideration should be given to attaching temporary blank sign panels to the structure.

Cost of Mast Arm and Pole paid for under pay item 87700180 - STEEL MAST ARM ASSEMBLY AND POLE, 28 FT. See signal schedule on sheet 2 of 10 and Traffic Signal Quantities on sheet 1 of 10.

<u>LOADING</u> 90 M.P.H. Wind Velocity

DESIGN STRESSES FIELD UNITS

<u>FIELD UNITS</u> f'c = 3,500 psi fy = 60,000 psi

SIGN STRUCTURE DATA TABLE

		<i></i>	Act			Foundation				
Structure Number	Station	Elevation A	Dimension D	Sign/Signal Area	Elevation Top	Elev. Bottom	А	В	F	Concrete (Cu. Yds.)
7C058LBRUL0001.0	55+70.00	688.78	6'-8½"	38 Sq Ft	687.71	658.71	18'-3"	10'-9"	29'-0"	5.3

BILL OF MATERIAL

ITEM	UNIT	TOTAL
DRILLED SHAFT CONCRETE FOUNDATIONS	Cu. Yds.	5.3

Kaskaskia
Engineering Group, LLC
PROFESSIONAL REGISTRATIONS
Dilinoir Professional Design Firm
Professional Engineering Group
Professional Engineering Group


	USER NAME = rjo	DESIGNED -	MLC	REVISED -
		DRAWN -	RJO	REVISED -
0.	PLOT SCALE = 2.0000 ' / in.	CHECKED -	JW	REVISED -
	PLOT DATE = 4/27/2021	DATE -	4/30/2021	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION


MA	-1 STEE	L MAST	ARM	ASSEMBL	/ &	POLE 28
		F0U	NDATI	ON PLAN		
	SHEET 9	OF	10 SH	EETS STA.		TO STA.

SCALE:

F.A.U. RTE	SECT	ΓΙΟΝ		COUNTY	TOTAL SHEETS	SHE
7448	09-00933	3-01-BR		MACON	1019	72
				CONTRA	CT NO.	958
		ILL INIOIC	CED AL	D DDOJECT		

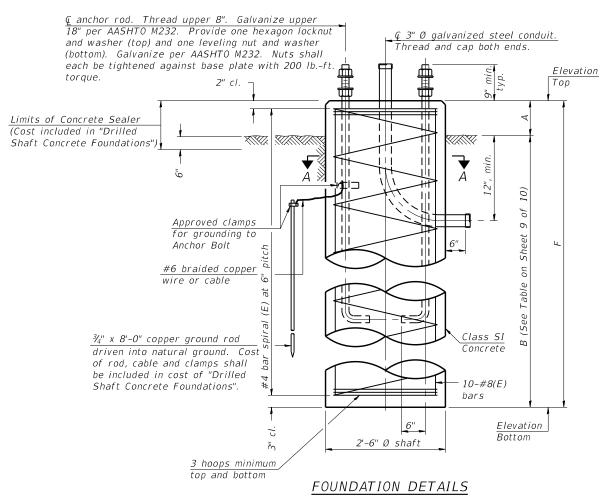

Typical, except conduit may only be required at one foundation. Provide conduit openings both poles.

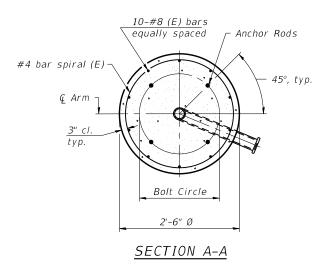

FOUNDATIONS:

No sonotubes or decomposable forms shall be used below the lower conduit entrance. Permanent metal forms or other shielding may not be left in place below that elevation without the Engineer's written permission.

Concrete shall be placed monolithically, without construction joints.

Backfill shall be placed per Article 502 of Standard Specification and prior to erection of support column.

A normal surface finish followed by a Concrete Sealer application will be required on concrete surfaces above the lowest elevation 6" below finished ground line. Cost included in Drilled Shaft Concrete Foundation.

NOTE:

See Standard Plan 880006.01 Traffic Signal Mounting Details for signal head mounting details. See sheet 3 of 10 for anchor rod diameter and bolt circle dimension.




USER NAME = rjo	DESIGNED -	MLC	REVISED -	
	DRAWN -	RJO	REVISED -	
PLOT SCALE = 2.0000 ' / in.	CHECKED -	JW	REVISED -	
PLOT DATE = 4/27/2021	DATE -	4/30/2021	REVISED -	

					F.A.U. RTE	SECTION	V	COUNTY	TOTAL SHEETS	SHEET NO.
	FOUNDATION PLAN					7448 09-00933-0		MACON	1019	730
	FOUNDATION FLAN							CONTRA	CT NO.	95893
SCALE:	SHEET 10	OF 10 SHE	ETS STA.	TO STA.	ILLINOIS FED. AID PROJECT					

ELECTRICAL SYMBOLS FOR PROPOSED WORK

			
•	PROPOSED LIGHTING UNIT 40' M.H., 12' MA, LED LUMINAIRE, 240V ALUMINUM POLE	_ 4	LIGHTED SIGN STRUCTURE-CANTILEVER TYPE (NUMBER OF FLUORESCENT FIXTURES AS INDICATED - TYP.)
—	PROPOSED COMBINATION LIGHTING UNIT 45' M.H., 1 OR 2 LIGHTING 15' MA, LED LUMINAIRE, 240V, MOUNTED ON TRAFFIC SIGNAL MAST ARM ASSEMBLY AND POLE	<u>□</u> ××××1 6	LIGHTED SIGN STRUCTURE-TRUSS TYPE LIGHTED SIGN STRUCTURE-BRIDGE MOUNT TYPE
LED •	UNDERPASS LUMINAIRE: LED, TYPE AS SHOWN ON PLANS (PRIMARY DISTRIBUTION PATTERN DIRECTION AS INDICATED BY ARROW)		DYNAMIC MESSAGE SIGN
M	MANHOLE ELECTRIC HANDHOLE: TYPE AS INDICATED	FBS	FLASHING BEACON SIGN CLOSED CIRCUIT TELEVISION CAMERA
	TYPE E1: PRECAST CONCRETE, 21.5"x21.5"x30", IDOT STANDARD 814001	М	MICROWAVE DETECTOR
	TYPE E2: PRECAST CONCRETE-HEAVY DUTY, 22"x22"x30", IDOT STANDARD 814001	→ OR	DETECTOR LOOP
	TYPE C1: COMMUNICATIONS VAULT, 49%"x32%"x57" TYPE S1: PRECAST CONCRETE-HEAVY DUTY, 22"x22"x36"		PROPOSED LIGHTING CONTROLLER CABINET 100A, 120/240V, 1-PH, 3 WIRE CITY MAINTAINED
	TYPE S2: PRECAST CONCRETE-HEAVY DUTY SPECIAL, 30"x30"x36"	A	AERIAL CABLE
нн	DOUBLE HANDHOLE	0	FLEXIBLE CONDUIT
J	JUNCTION BOX: TYPE AND SIZE AS INDICATED ON PLANS		RACEWAY EMBEDDED IN STRUCTURE
Р	PULL BOX: TYPE AND SIZE AS INDICATED ON PLANS		EXPOSED CONDUIT
T	TELEPHONE CONNECTION	ι -	RACEWAY OR DIRECT BURIAL CABLE UNDERGROUND WITHOUT ENCASEMENT
	PAD MOUNTED ELECTRIC UTILITY TRANSFORMER		RIGID GALVANIZED STEEL CONDUIT SLEEVE, INSTALLED BELOW PAVEMENT
ф	ELECTRIC UTILITY POLE		SEELL, INSTITUTE SEEL TO THE TOTAL THE TOTAL TO THE TOTAL THE TOTAL TO THE TOTAL TH
Ť	GROUND ROD	•••	UNDERGROUND REINFORCED CONCRETE ENCASED CONDUIT DUCTBANK, UNLESS NOTED OTHERWISE. (NUMBER, TYPE, AND SIZE OF DUCTS AS SHOWN)
\Box	MAIN SERVICE FUSED DISCONNECT SWITCH (RATING AS INDICATED ON THE PLANS)	0•	
PC	PHOTOCELL		CONDUIT TURNED DOWN
			CONDUIT TURNED UP

GENERAL ELECTRICAL CALLOUTS

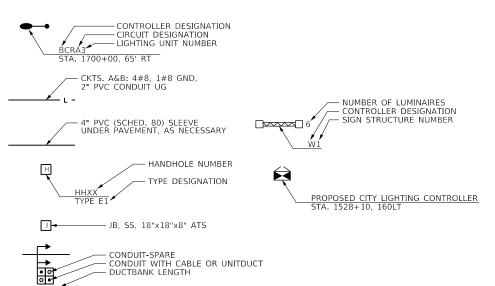

ı		
		ABBREVIATIONS
	ABBREVIATION	DESCRIPTION
	AC A/C	ALTERNATING CURRENT AERIAL CABLE
	A.D.A. AFG	AMERICANS WITH DISABILITIES ACT
	A/R	ABOVE FINISHED GRADE AERIAL CABLE TO BE REMOVED
	ATS B	ATTACHED TO STRUCTURE BASELINE
	вое Св	IDOT BUREAU OF ELECTRICITY CIRCUIT BREAKER
	CKT	CIRCUIT
	Ψ CLC	CENTERLINE COMBINATION LIGHTING CONTROLLER
	CM CNC	CENTIMETER COILABLE NONMETALLIC CONDUIT
	CP CT	CONTROL PANEL CURRENT TRANSFORMER
	DA	DAVIT ARM
	DC DIA	DIRECT CURRENT DIAMETER
	DP E	DISTRIBUTION PANEL EXISTING UNIT TO REMAIN
	ECA EM	ELECTRIC CABLE ASSEMBLY
		EXISTING UNIT TO BE MODIFIED (e.g. NEW LUMINAIRE, BALLAST OR MAST ARM)
	EOP ER	EDGE OF PAVEMENT EXISTING RELOCATED UNIT IN PROPOSED LOCATION
	ET ETR	EXISTING TEMPORARY UNIT TO REMAIN EXISTING TEMPORARY RELOCATED UNIT
	FT FND BW	FEET OR FOOT FOUNDATION BARRIER WALL
	FND BW OS	FOUNDATION BARRIER WALL OFFSET
	FND CON FND CON OS	FOUNDATION CONCRETE FOUNDATION CONCRETE OFFSET
	FND MET FND PW	FOUNDATION METAL FOUNDATION PARAPET WALL
	FU GFCI	FUSE GROUND FAULT CIRCUIT INTERRUPTER
	GND	GROUND
	HID HPS	HIGH INTENSITY DISCHARGE HIGH PRESSURE SODIUM
	IDOT JB	ILLINOIS DEPARTMENT OF TRANSPORTATION JUNCTION BOX
	KVA KW	KILOVOLT-AMPERE KILOWATTS
	LT	LEFT
	LTFMC LTG	LIQUIDTIGHT FLEXIBLE METAL CONDUIT LIGHTING
	M MA	METER MAST ARM
	MM MTG HT	MILLIMETER MOUNTING HEIGHT
	MW NO. #	MESSENGER WIRE NUMBER
	P	PROPOSED
	PB PH, ⊘	PUSH BUTTON PHASE
	PNL PVC	PANEL POLYVINYL CHLORIDE
	PVCC RGC PT	PVC COATED RIGID GALVANIZED STEEL CONDUIT POTENTIAL TRANSFORMER
	R	EXISTING UNIT TO BE REMOVED (OWNER SALVAGED U.N.O.)
	RR RECP	EXISTING UNIT TO BE REMOVED AND RELOCATED RECEPTACLE
	RGC RT	RIGID GALVANIZED STEEL CONDUIT RIGHT
	SEL SW SPARE	SELECTOR SWITCH SPARE
	SPACE SS	SPACE STAINLESS STEEL
	STA	STATION
	STRUCT T	STRUCTURE TEMPORARY LIGHTING UNIT
	TMP TR	TEMPORARY TEMPORARY UNIT TO BE REMOVED,
	TRR	SALVAGE EQUIPMENT AS SPECIFIED TEMPORARY UNIT TO BE REMOVED
		AND RELOCATED
	TUR	TEMPORARY UNIT ON UTILITY POLE TO BE REMOVED
	TYP. UD	TYPICAL UNIT DUCT
	ŪĞ U.N.O.	UNDERGROUND UNLESS NOTED OTHERWISE
	WP XEMR	WOOD POLE TRANSFORMER

GENERAL NOTES:

- 1. THE CONTRACTOR SHALL VERIFY ALL OF THE INFORMATION SHOWN ON THE CONTRACT DRAWINGS, WHICH WOULD AFFECT THE WORK UNDER THIS CONTRACT.
- 2. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO ASCERTAIN EXISTING FIELD CONDITIONS BEFORE BIDDING ON THIS PROJECT, SPECIFICALLY AS THEY RELATE TO LUMP SUM ITEMS AND UNIT PRICE ITEMS.
- 3. ALL NEW CONDUIT, UNIT DUCTS, DIRECT BURIAL CABLE, AND APPURTENANCES ARE INDICATED DIAGRAMMATICALLY ON THE DRAWINGS. THE ACTUAL LOCATIONS IN THE FIELD SHALL MEET WITH APPROVAL OF THE ENGINEER
- 4. THE ELECTRICAL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE IDOT STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND ASSOCIATED SUPPLEMENTAL CONDITIONS.
- 5. THE SCALE SHOWN ON PLAN DRAWINGS APPLIES ONLY TO THE FULL SIZE PLANS AND NOT TO REDUCED SIZE PLANS.
- 6. THE CONTRACTOR SHALL FURNISH AND INSTALL LUMINAIRES IN ACCORDANCE WITH THE SUPPLIER'S RECOMMENDATIONS AND IN ACCORDANCE WITH THE SPECIFICATIONS. THE COST OF THIS WORK AND MATERIAL SHALL BE INCLUDED IN THE APPLICABLE LUMINAIRE PAY ITEM. SEPARATE PAYMENT WILL NOT BE MADE.
- 7. ALL LUMINAIRES SHALL BE ORIENTED WITH THE OPTICS PERPENDICULAR TO THE ROADWAY UNLESS OTHERWISE INDICATED OR DIRECTED BY THE ENGINEER. THIS WORK SHALL BE CONSIDERED INCLUDED IN THE APPLICABLE LUMINAIRE PAY ITEMS. SEPARATE PAYMENT WILL NOT BE MADE.
- 8. ALL LIGHTING EQUIPMENT REMOVED AS PART OF THIS CONTRACT SHALL REMAIN THE PROPERTY OF THE CITY AND SHALL BE DELIVERED TO THE STATE MAINTENANCE
- 9. CONDUITS AND UNIT DUCTS SHALL BE INSTALLED AT A MINIMUM 760 MM (30 INCHES) DEPTH BELOW GRADE AND POSITIONED IN THE FIELD TO AVOID CONFLICT WITH ROADWAY UNDER DRAINS AND OTHER EXISTING AND PROPOSED UTILITIES. THE CONTRACTOR SHALL INCREASE DEPTH OF UNIT DUCT AND CONDUIT AS REQUIRED AT NO ADDITIONAL COST TO THE STATE/CITY. THE CONTRACTOR SHALL COORDINATE RACEWAY DEPTH WITH THE ELECTRICAL DETAILS AND THE ENGINEER.
- 10. WHERE THE CONTRACTOR'S EXCAVATION MEETS AN OBSTRUCTION, THE CONTRACTOR SHALL NOTIFY THE ENGINEER FOR DIRECTION IN WRITING PRIOR TO EXCAVATION. THE CONTRACTOR SHALL RESTORE ANY DAMAGE TO EXISTING SYSTEMS OR UTILITIES AND REMOVE EXISTING OBSTRUCTIONS AND FOUNDATIONS TO THE SATISFACTION OF THE ENGINEER. THIS WORK SHALL BE CONSIDERED INCIDENTAL TO THE APPROPRIATE PAY
- 11. WHEREVER THE TEMPORARY AERIAL CABLE IS REQUIRED TO CROSS AN EXISTING AND/OR PROPOSED ROADWAY, THE CONTRACTOR SHALL MAINTAIN A MINIMUM OF 6
 METER (20 FEET) OF VERTICAL CLEARANCE OVER THE ROADWAY AT ALL TIMES.
- 12. THE POLES SHALL BE KEPT OUT OF DITCH AREA AND PLACED CLOSER TO THE ROADWAY, IF NEEDED, TO GET OUT OF FLOW LINE.
- 13. COORDINATE ALL WORK WITH OTHER DISCIPLINES AND CONTRACTORS INCLUDING TRAFFIC SIGNAL WORK. INSTALL LIGHT FIXTURES AND LIGHTING MAST ARMS ON COMBINATION TRAFFIC AND LIGHTING POLES ACCORDING TO IDOT STANDARDS AND
- 14. ALL MATERIALS, EQUIPMENT AND LABOR NEEDED TO INSTALL AND CONNECT THE SERVICE FROM THE UTILITY TRANSFORMER (GROUND OR POLE MOUNTED) OR SERVICE PEDESTAL TO THE LIGHTING CONTROLLER CABINET SHALL BE INCLUDED UNDER PAY ITEM NO. 80400100 - ELECTRIC SERVICE INSTALLATION. WORK SHALL INCLUDE THE SERVICE WEATHER HEAD, RISERS, TRANSFORMER CONCRETE BASE (IF REQUIRED), CABLE, CONDUIT AND TRENCHING FOR THE CONDUIT AS SHOWN ON THE PLANS OR AS NEEDED TO COMPLETE THE INSTALLATION. ALL OTHER HARDWARE, CONNECTIONS, SPLICING, AND WIRING TO THE NEW LIGHTING CONTROLLER ARE ALSO INCLUDED UNDER THE SAME PAY ITEM. THE ELECTRIC SERVICE CABLE AND CONDUIT SIZE MUST BE AS SHOWN ON THE PLANS OR REQUIRED BY CODE. THE CONTRACTOR WILL BE REIMBURSED FOR ANY PAYMENT MADE DIRECTLY TO THE ELECTRIC UTILITY FOR ITS WORK UNDER A SEPARATE PAY ITEM.
- 15. THE CONTRACTOR MUST OBTAIN ALL NECESSARY AND REQUIRED PERMITS PRIOR TO COMMENCING WORK AND MUST COMPLY WITH ALL STATE, COUNTY AND CITY RULES AND REGULATIONS.
- 16. THE CONTRACTOR MUST COORDINATE ALL CONSTRUCTION ACTIVITIES WITH THE UTILITIES BEFORE STARTING WORK. COORDINATE NEW ELECTRIC SERVICES WITH AMEREN-ILLINOIS AS SOON AS NOTICE TO PROCEED IS GIVEN IN ORDER TO AVOID DELAYS IN OBTAINING THE ELECTRIC SERVICES.
- 17. CONTRACTOR MUST VERIFY ALL LIGHT POLE LOCATIONS PROPOSED TO BE INSTALLED ON STRUCTURES PRIOR TO THE ORDERING OF MATERIALS FOR INSTALLATION OF LIGHT POLES ON WALLS, PARAPETS AND OTHER STRUCTURES. COORDINATE ALL LIGHTING AND ELECTRICAL WORK WITH STRUCTURAL PLANS AND DETAILS. REFER ALL CONFLICTS AND ISSUES TO THE CONSTRUCTION MANAGER FOR RESOLUTION BEFORE ACQUIRING ANY MATERIALS OR PROCEEDING WITH INSTALLATION OF CONCRETE FOR FOUNDATIONS.

RL-01


DESIGNED -MAE REVISED DRAWN CAM REVISED HECKED WDS REVISED PLOT DATE = 10/29/2021 REVISED DATE 10/22/2021


STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

SCALE: N.T.S

SHEET

PROPOSED LIGHTING PLAN	F.A.U. RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
ELECTRICAL SYMBOLS AND ABBREVIATIONS	7448	09-00933-01-BR	MACON	1019	731
ELECTRICAL STRIDGES AND ADDREVIATIONS			CONTRA	CT NO.	95893
SHEET 1 OF 11 SHEETS STA TO STA	THE INDICATE OF THE PROJECT				

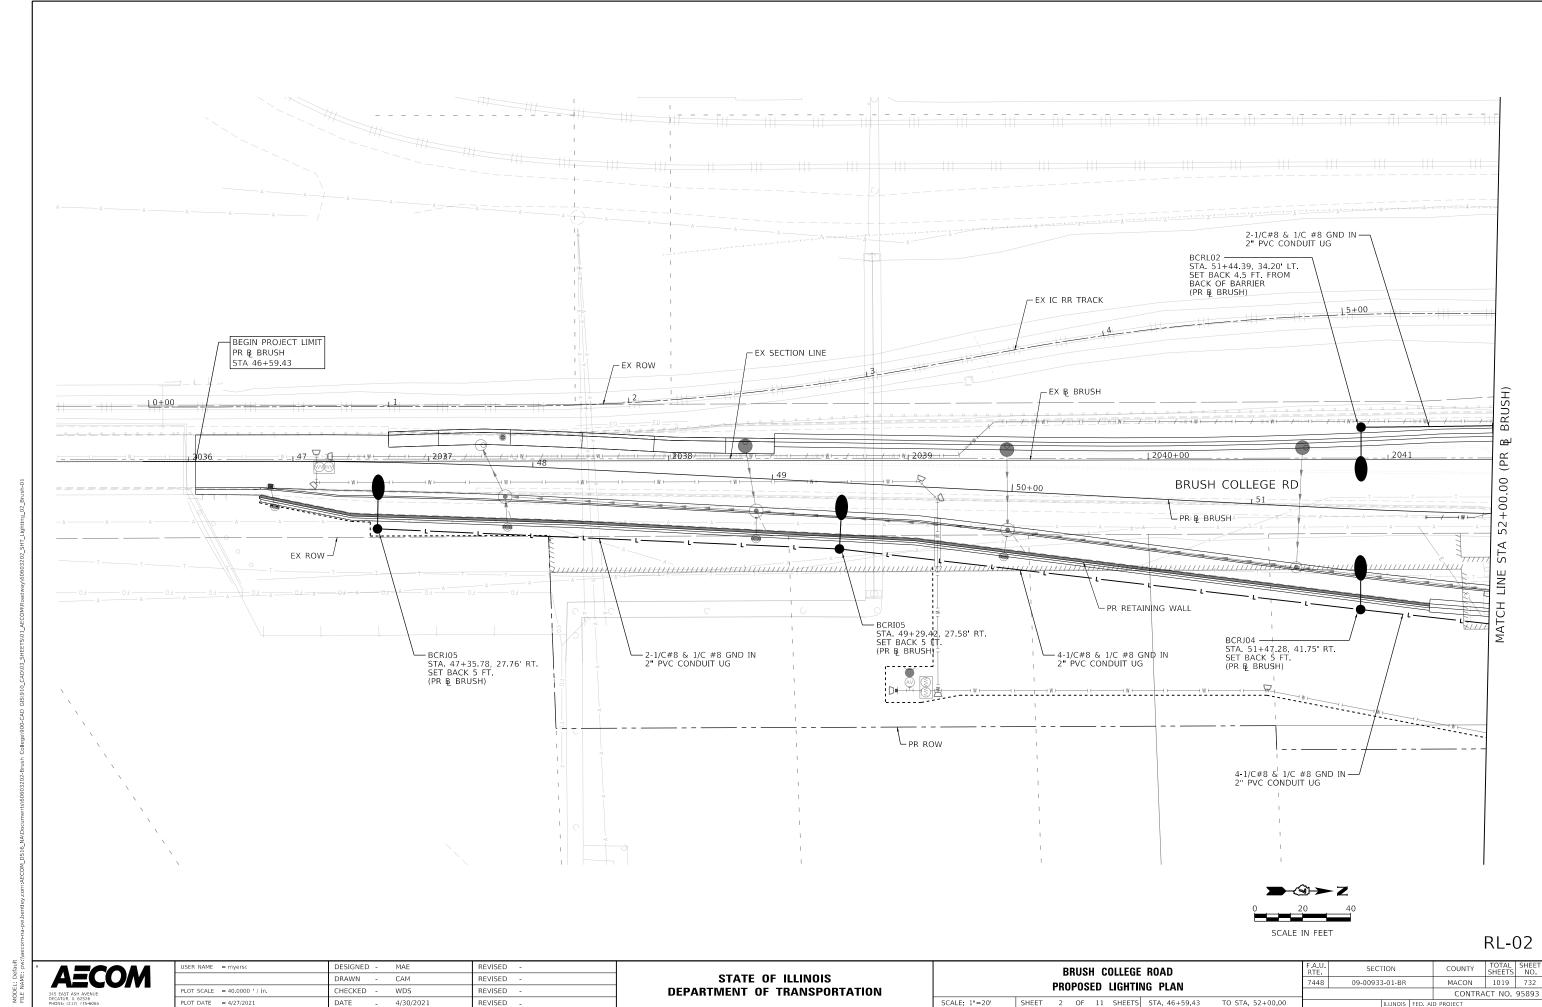

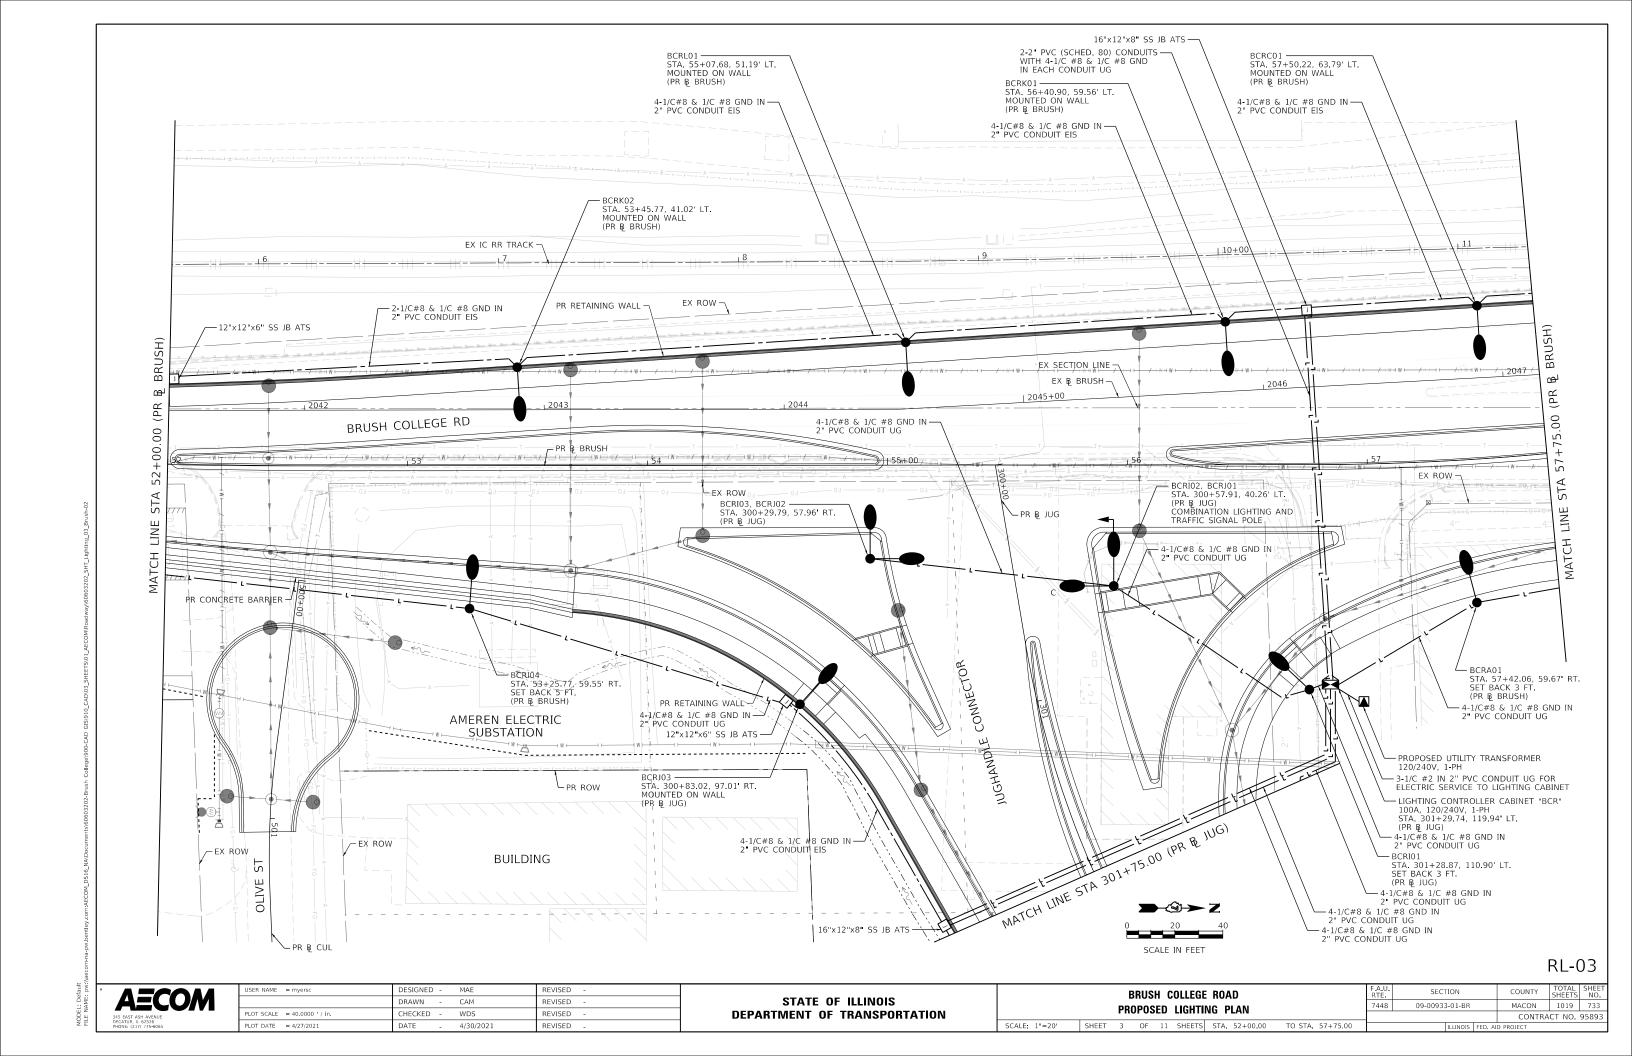

RL-04


AECOM

345 EAST ASH AVENUE
DECATUR. II. 62576
PHONE: CIJI) 775-6065

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCALE IN FEET

,—EX ROW

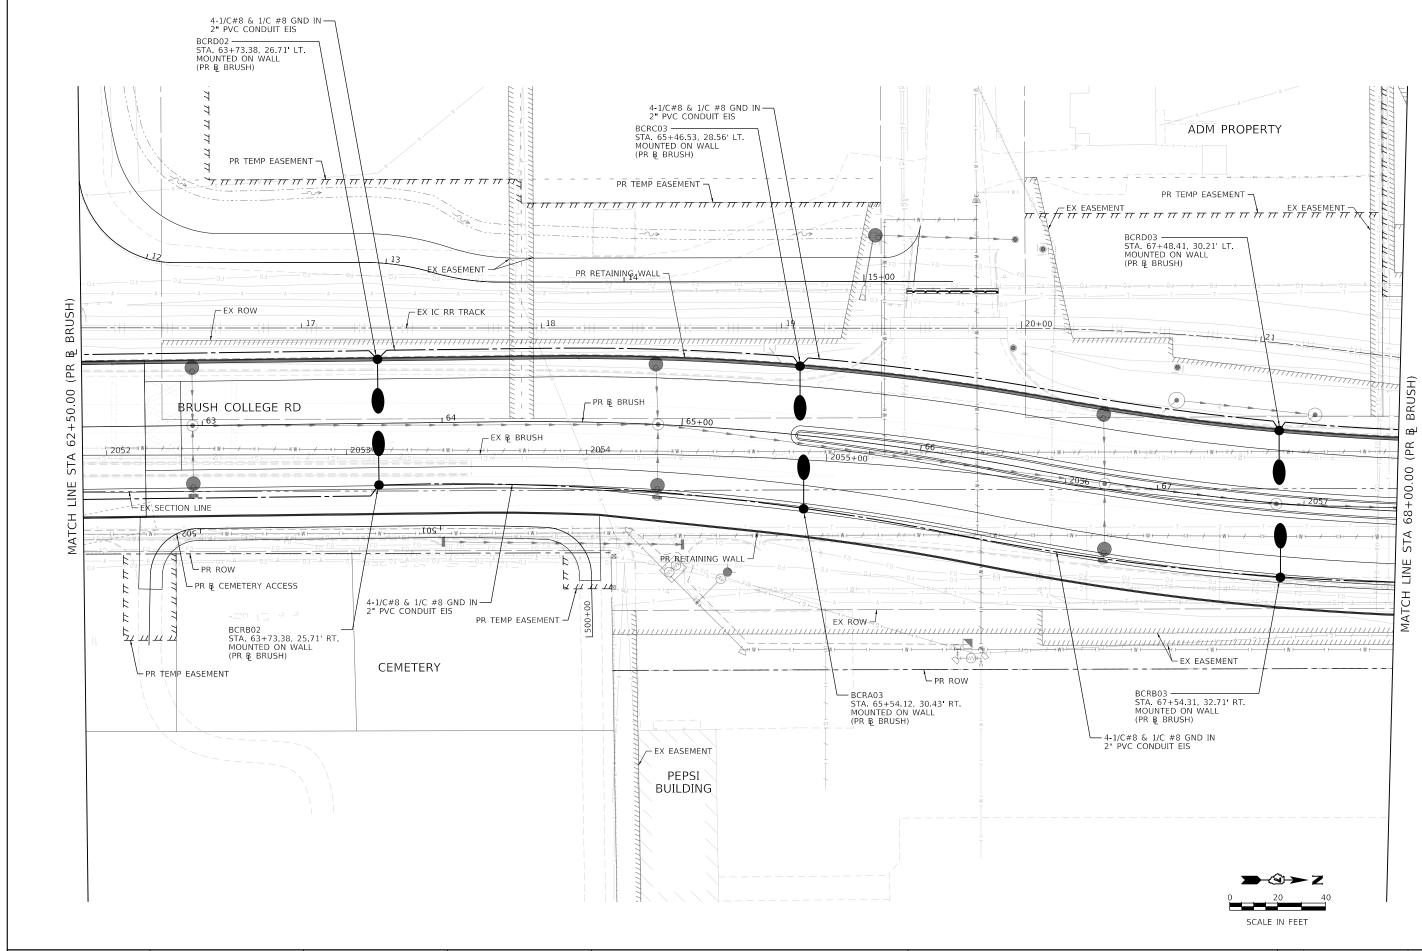

RL-05

AECOM

345 EAST ASH AVENUE
DECATUR, IL 62526

 USER NAME
 = myersc
 DESIGNED - MAE
 REVISED - REVISED - MAE

 PLOT SCALE
 = 40,0000 ' / in.
 CHECKED - WDS
 REVISED - REVISED - MAE

 PLOT DATE
 = 10/29/2021
 DATE - 10/22/2021
 REVISED - MAE


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

 FAUL RTE. 7448
 SECTION
 COUNTY SHEETS NO.
 TOTAL SHEETS NO.
 SHEETS NO.

 7448
 09-00933-01-BR
 MACON
 1019
 735

 CONTRACT NO.
 95893

 ILLINOIS
 FED. AID PROJECT

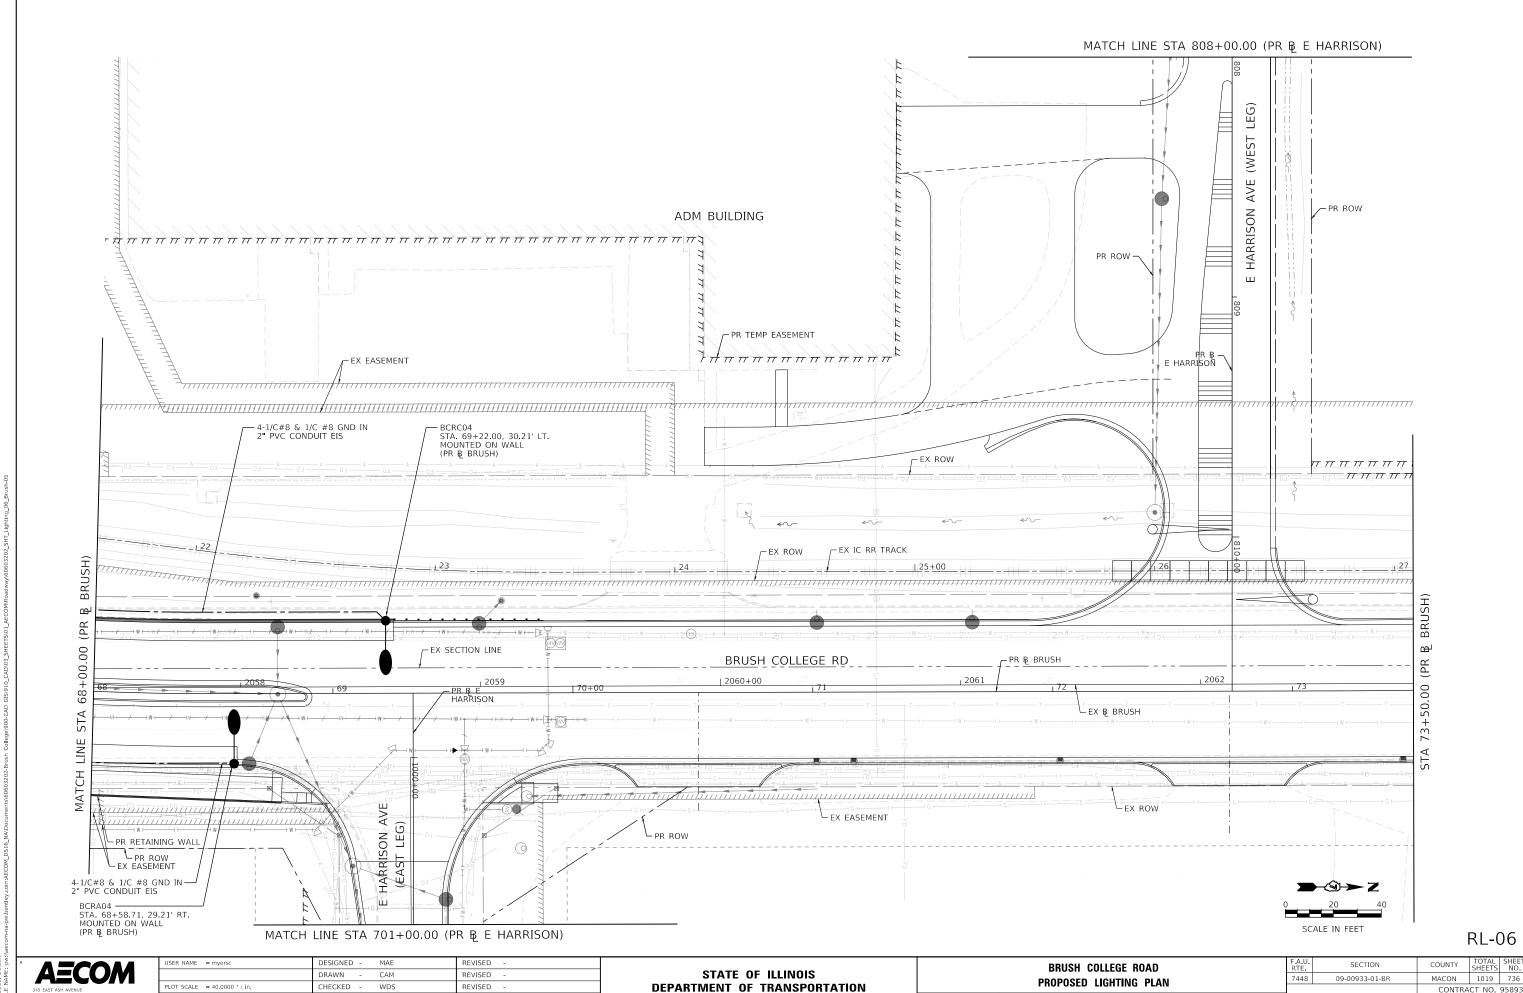



4/30/2021

RL-06

CONTRACT NO. 95893

SCALE: 1"=20' SHEET 6 OF 11 SHEETS STA. 68+00.00 TO STA. 73+50.00

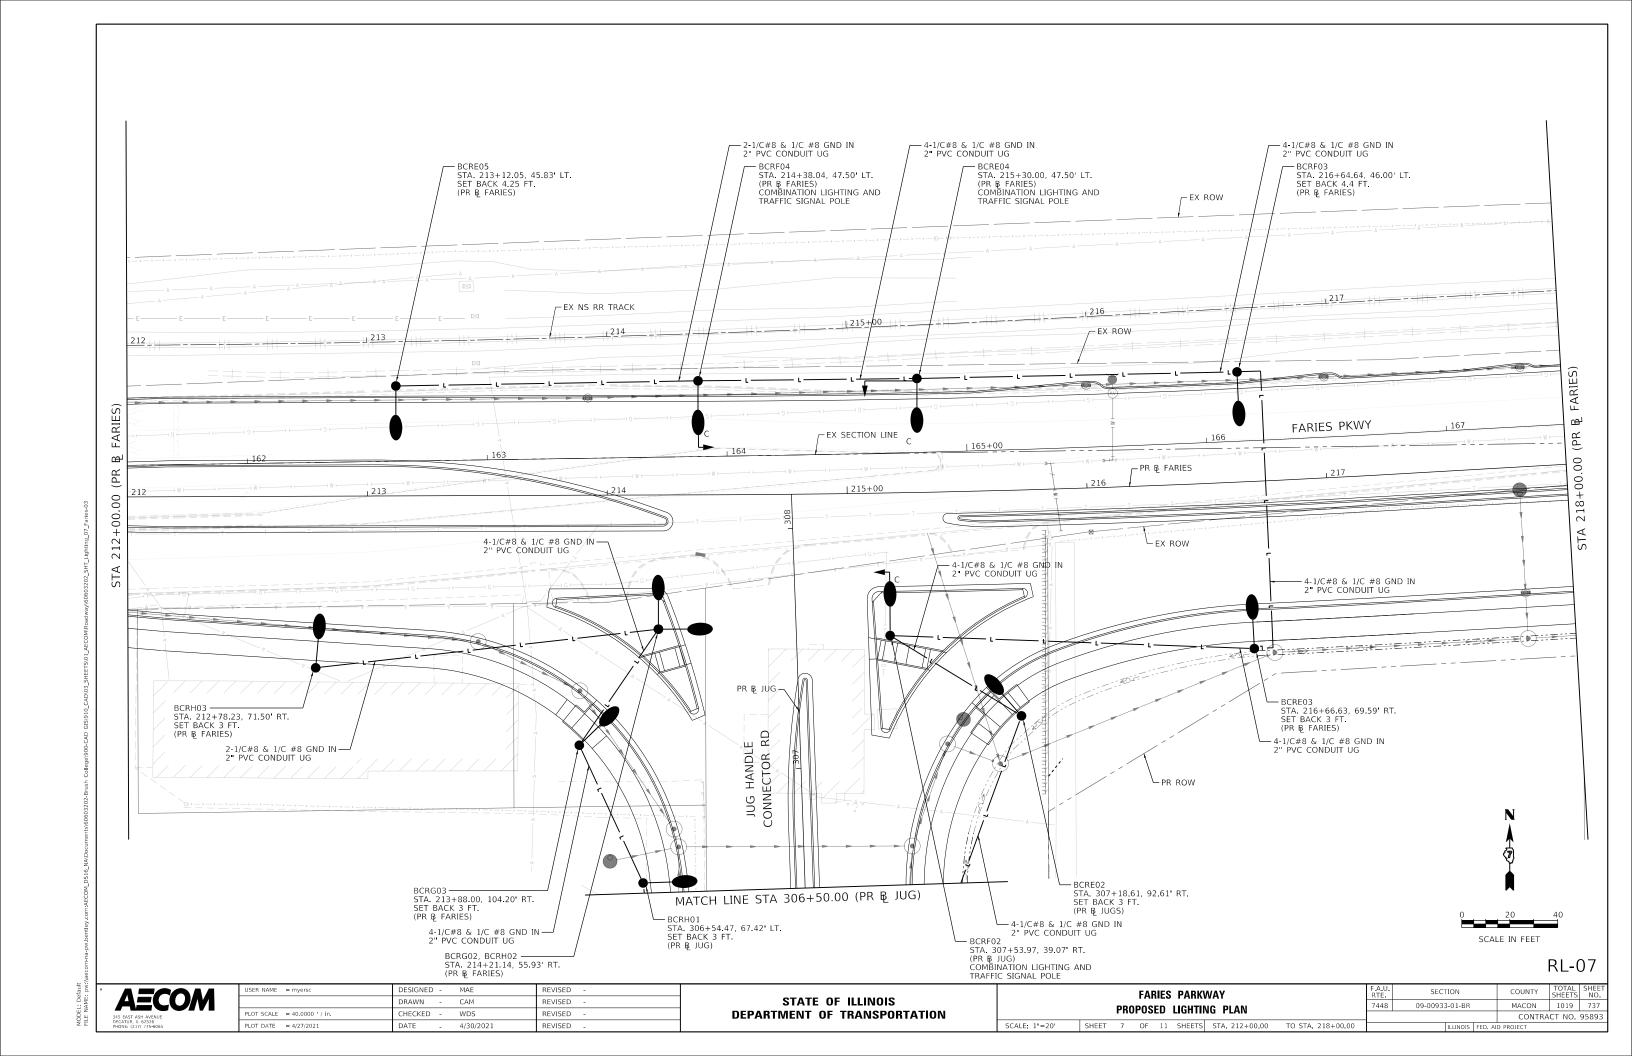

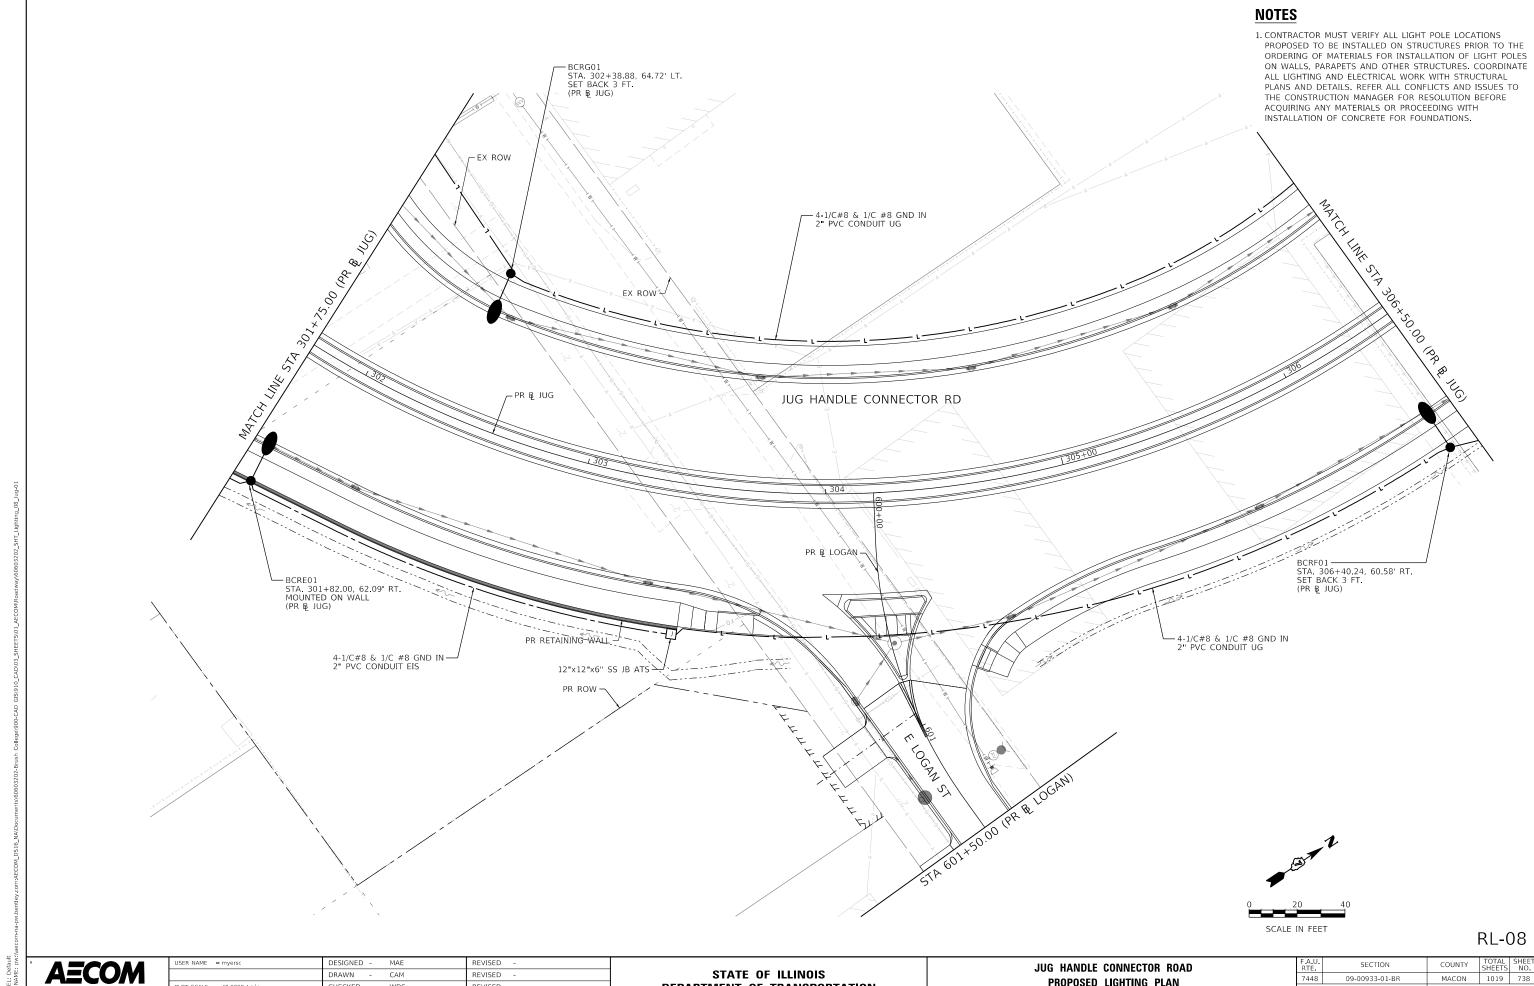


LOT SCALE = 40.0000 / in. CHECKED WDS REVISED PLOT DATE = 10/29/2021 REVISED 10/22/2021

DEPARTMENT OF TRANSPORTATION

PROPOSED LIGHTING PLAN SCALE: 1"=20' SHEET 8 OF 11 SHEETS STA. 301+75.00 TO STA. 306+50.00

09-00933-01-BR MACON 1019 738 7448 CONTRACT NO. 95893

- 2. FURNISH AND INSTALL A 2-POLE CIRCUIT BREAKER IN LIGHTING CONTROL CABINET FOR EACH 240V LIGHTING CIRCUIT PLUS TWO ADDITIONAL SPARE BREAKERS. INCLUDE ALL TERMINAL AND SPLICE BLOCKS IN THE
- 3. PROVIDE ALL THE NECESSARY PARTS AND MATERIALS IN THE LIGHTING CABINET TO FACILITATE THE WIRING OF ALL LIGHTING CIRCUITS AS SHOWN IN THE PLANS
- 4. FURNISH AND INSTALL LIGHTING CONTROLLER CABINET, BASE MOUNTED ACCORDING TO IDOT STANDARD 825021-04. INCLUDE ALL NECESSARY PARTS AND MATERIALS AS SHOWN IN THE STANDARD AND IN THESE PLANS TO ALLOW FOR THE CIRCUITING OF ALL LIGHT POLES. PROVIDE ALL ADDITIONAL CIRCUIT BREAKERS, TERMINAL BLOCKS, WIRING, ETC... THIS

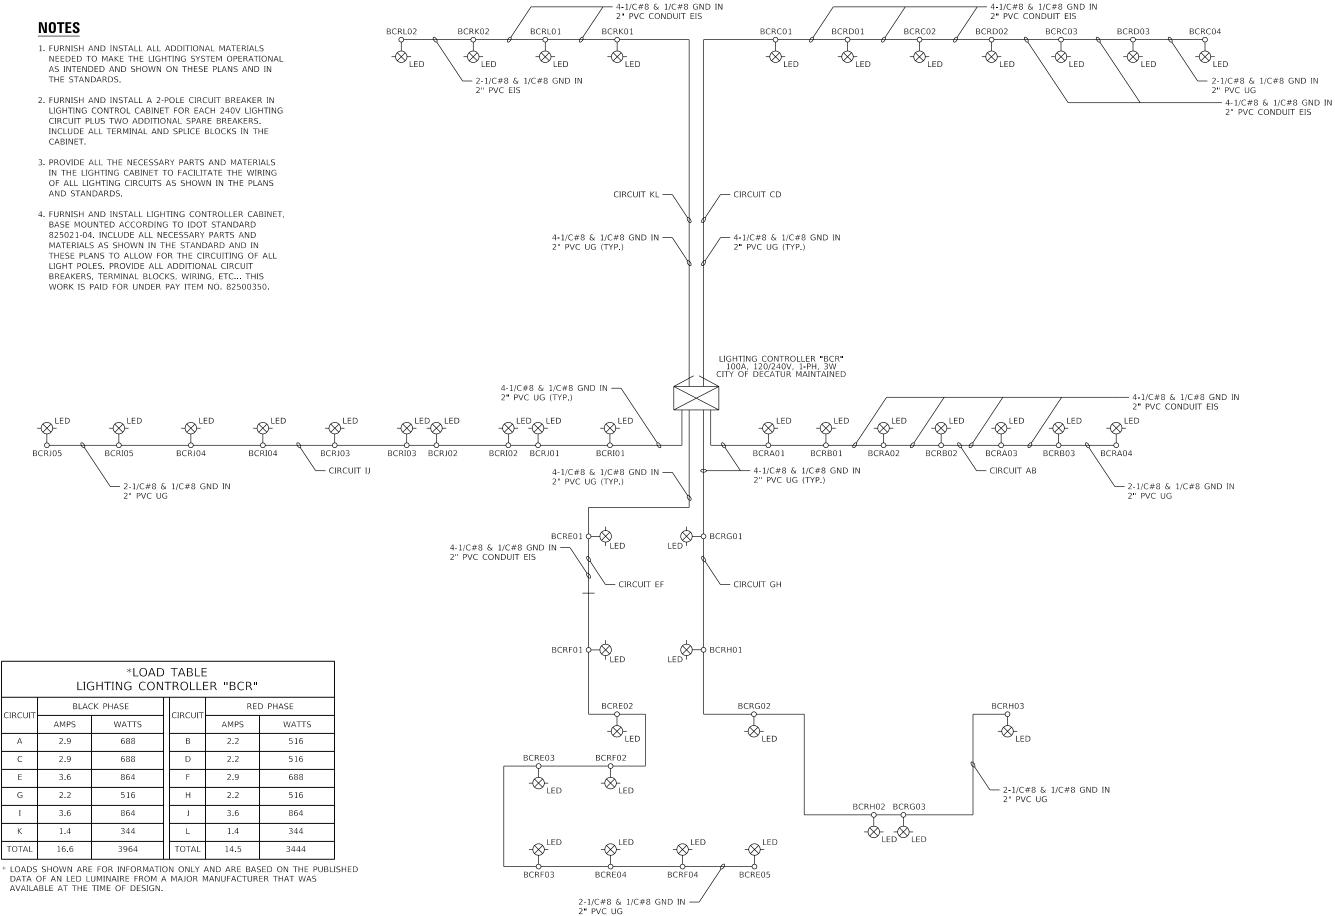

*LOAD TABLE LIGHTING CONTROLLER "BCR"											
CIRCUIT-	BLAC	CK PHASE	CIRCUIT	REI	D PHASE						
	AMPS	WATTS	CIRCUIT	AMPS	WATTS						
А	2.9 688		В	2.2	516						
С	2.9	2.9 688		2.2	516						
Е	3.6	864	F	2.9	688						
G	2.2	516	Н	2.2	516						
I	3.6	864	J	3.6	864						
К	1.4	344	L	1.4	344						
TOTAL	AL 16.6 3964		TOTAL	14.5	3444						

DATA OF AN LED LUMINAIRE FROM A MAJOR MANUFACTURER THAT WAS AVAILABLE AT THE TIME OF DESIGN.

USER NAME = myersc	DESIGNED -	MAE	REVISED	-
	DRAWN -	CAM	REVISED	-
PLOT SCALE = 40.0000 ' / in.	CHECKED -	WDS	REVISED	-
PLOT DATE = 4/27/2021	DATE -	4/30/2021	REVISED	-

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

SCALE: N.T.S

PROPOSED LIGHTING PLAN	F.A.U. RTE	SECT
LIGHTING CONTROLLER WIRING DIAGRAM	7448	09-00933
LIGHTING CONTROLLER WHIRING DIAGRAM		
CHEET O OF 11 CHEETE CTA TO CTA		


4-1/C#8 & 1/C#8 GND IN

CTION COUNTY 33-01-BR MACON 1019 739 CONTRACT NO. 95893


RL-09

COMBINATION POLE WIRING DETAIL

(NOT TO SCALE)

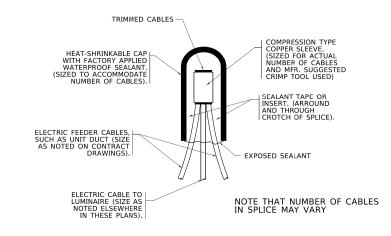

TYPICAL SPLICE DETAIL N.T.S.

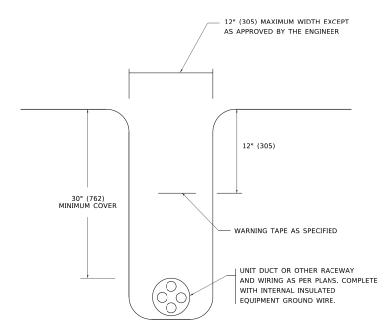

TYPICAL WIRING IN TRENCH DETAIL N.T.S.

" AECOM

345 EAST ASH AVENUE
DECATUR, IL 62526

 USER NAME
 = myersc
 DESIGNED
 MAE
 REVISED

 DRAWN
 CAM
 REVISED


 PLOT SCALE
 = 40,0000 ' / in.
 CHECKED
 WDS
 REVISED

 PLOT DATE
 = 4/27/2021
 DATE
 4/30/2021
 REVISED


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SCALE: N.T.S SHEET 10 OF 11 SHEETS STA.

SIDE VIEW (TRUSS ARM) N.T.S.

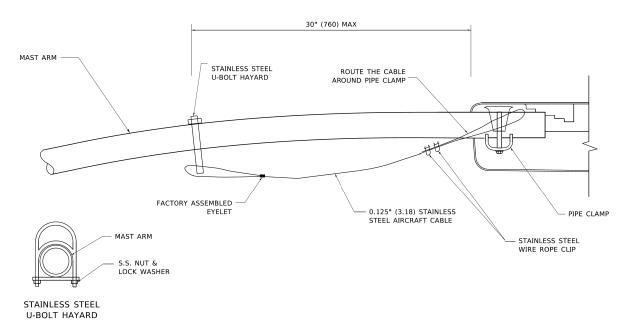

$\frac{\text{SIDE VIEW}}{\text{N.T.S.}} \hspace{0.1cm} \frac{\text{(SINGLE MEMBER OR DAVIT ARM)}}{\text{N.T.S.}}$

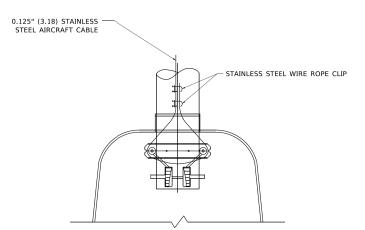

BOTTOM VIEW N.T.S.

NOTES:

SCALE: N.T.S

- 1. ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.
- 2. CONTRACTOR SHALL ADJUST THE WIRE CLIP TO ELIMINATE ANY SLACK FROM THE WIRE ROPE.
- 3. THE 0.125" (3.18) STAINLESS STEEL AIRCRAFT CABLE SHALL REMAIN VISIBLE FROM THE GROUND LEVEL.
- 4. THE BREAKING STRENGTH OF THE CABLE SHALL BE 1700 LBS. MIN.

AECOM

USER NAME = myersc	DESIGNED -	MAE	REVISED -
	DRAWN -	CAM	REVISED -
PLOT SCALE = 40.0000 / in.	CHECKED -	WDS	REVISED -
PLOT DATE = 4/27/2021	DATE -	4/30/2021	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

								F.A.U. RTE.	SEC ⁻	TION		COUNTY	TOTAL SHEETS	SHEET NO.
ELECTRICAL DETAILS							7448 09-00933-01-BR				MACON	1019	741	
										CONTRA	ACT NO.	95893		
	SHEET	11	OF	11	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT						



DECATUR, ILLINOIS

ILLINOIS CENTRAL RAILROAD STALEY HOLE LEAD TRACK

INDEX OF DRAWINGS XISTING GRADE CROSSING REMOVAL AT EXISTING EAST HARRISON AVENUE XISTING GRADE CROSSING REMOVAL AT EXISTING ADM ENTRANCE

AL SHALL BE ON THE RESIDENCE BRUSH COLLEGE ROAD SCALE IN FEET

PROJECT LOCATION AND KEYMAP

100% DESIGN

USER NAME = Seth.Walker	DESIGNED - SJM	REVISED -
	DRAWN - MLW	REVISED -
PLOT SCALE = 400.0000 ' / in.	CHECKED - RAC	REVISED -
PLOT DATE = 10/21/2021	DATE - 10/22/2021	REVISED -

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

BRUSH COLLEGE ROAD IC RR TITLE SHEET SCALE: 1"=200' SHEET 742 OF 1019 SHEETS STA.

SECTION 7448 09-00933-01-BR MACON 1019 742 CONTRACT NO. 95893

PROJECT INFORMATION

ILLINOIS CENTRAL RAILROAD COMPANY

FACILITY OWNER/OPERATOR: ILLINOIS CENTRAL RAILROAD COMPANY

PLANS DEVELOPED BY:

AECOM CONTACT: RUSSELL COATE 303 EAST WACKER DRIVE

SUITE 1400 CHICAGO, IL 60601 PHONE: (312) 861-4062

ILLINOIS CENTRAL RAILROAD COMPANY PROJECT OWNER:

CHICAGO DIVISION 17641 S ASHLAND AVE HOMEWOOD, IL 60430

REFERENCE DATUM:

HORIZONTAL: NAD 83 VERTICAL: NAVD 1988 SURVEY FEET

PROJECT SPECIFICATIONS:

CONTRACTOR SHALL ADHERE TO CN ENGINEERING SPECIFICATIONS FOR INDUSTRIAL TRACKS EFFECTIVE JUNE 15, 2011


PROJECT NOTES: ICRR FORCES AND/OR RAILROAD


CONTRACTOR TO COORDINATE WITH ROADWAY CONTRACTOR FOR SCHEDULE AND SEQUENCE OF CONSTRUCTION OF GRADE CROSSING CLOSURES AND PROPOSED GRADE


CROSSING CONSTRUCTION

	BRUSH COLLEGE ROAD										
	ICRR BILL OF MATERIALS										
ITEM	DESCRIPTION	QTY	UNIT								
1	Remove Track; Rails, Wood Ties and OTM (ADM Entrance)	80	TF								
2	Track Crossing Panel Removal (3 xings)	210	TF								
3	Track Ballast	100	TΝ								
	Includes Lift and Line and Unloading Ballast Cars										
4	No. 2 Hardw ood Track Ties (20" centers)	48	EA								
5	New Crossing Ties and all OTMs for ADM entrance	80	TF								
6	Rail, 115LB RE, CWR	160	LF								
7	Cut Spike fasteners	1	KEGS								
	(Assume min. 2 spikes per plate and 4 per plate at box										
	anchors, 240/keg)										
8	Box Anchors	96	EΑ								
	(Every other tie per A11)										
9	Tie Plates	96	EA								
10	Track Surface and Line	80	TF								
11	Track Crossing Panels - Timber Panels	80	TF								
12	Railroad Crossing Equipment (signal bungalow, gates,	2	EΑ								


NOTE: SEE ROADWAY PLANS FOR ROADWAY QUANTITIES

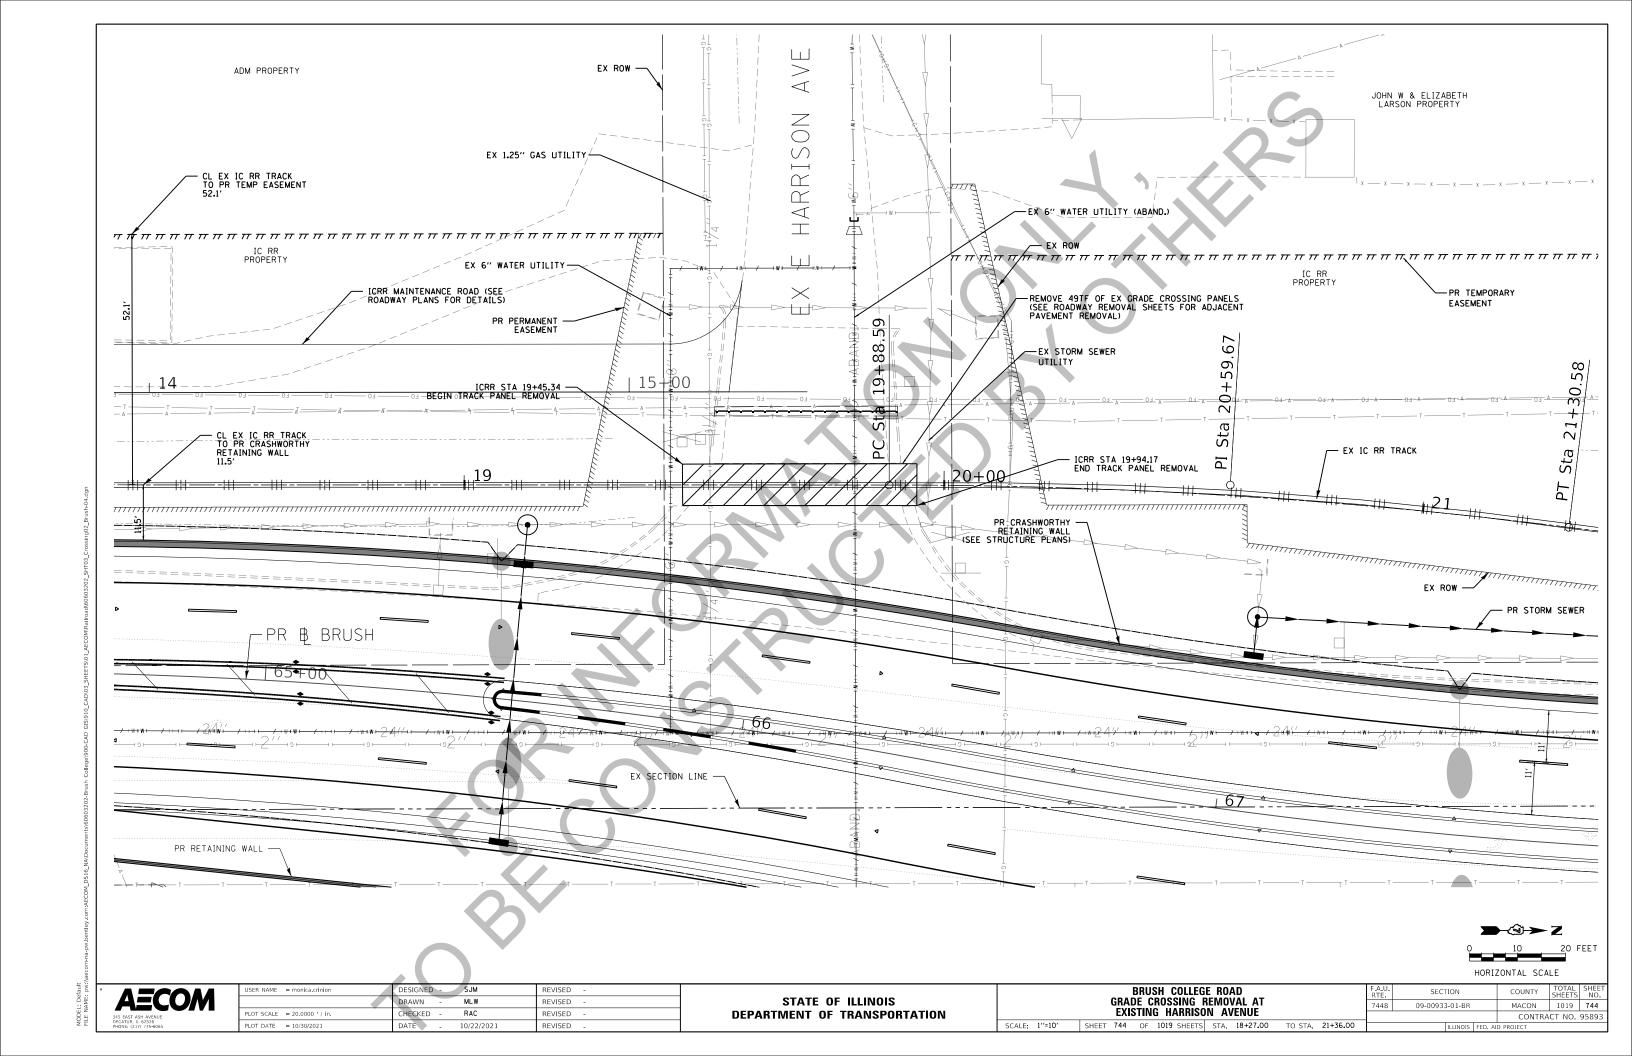


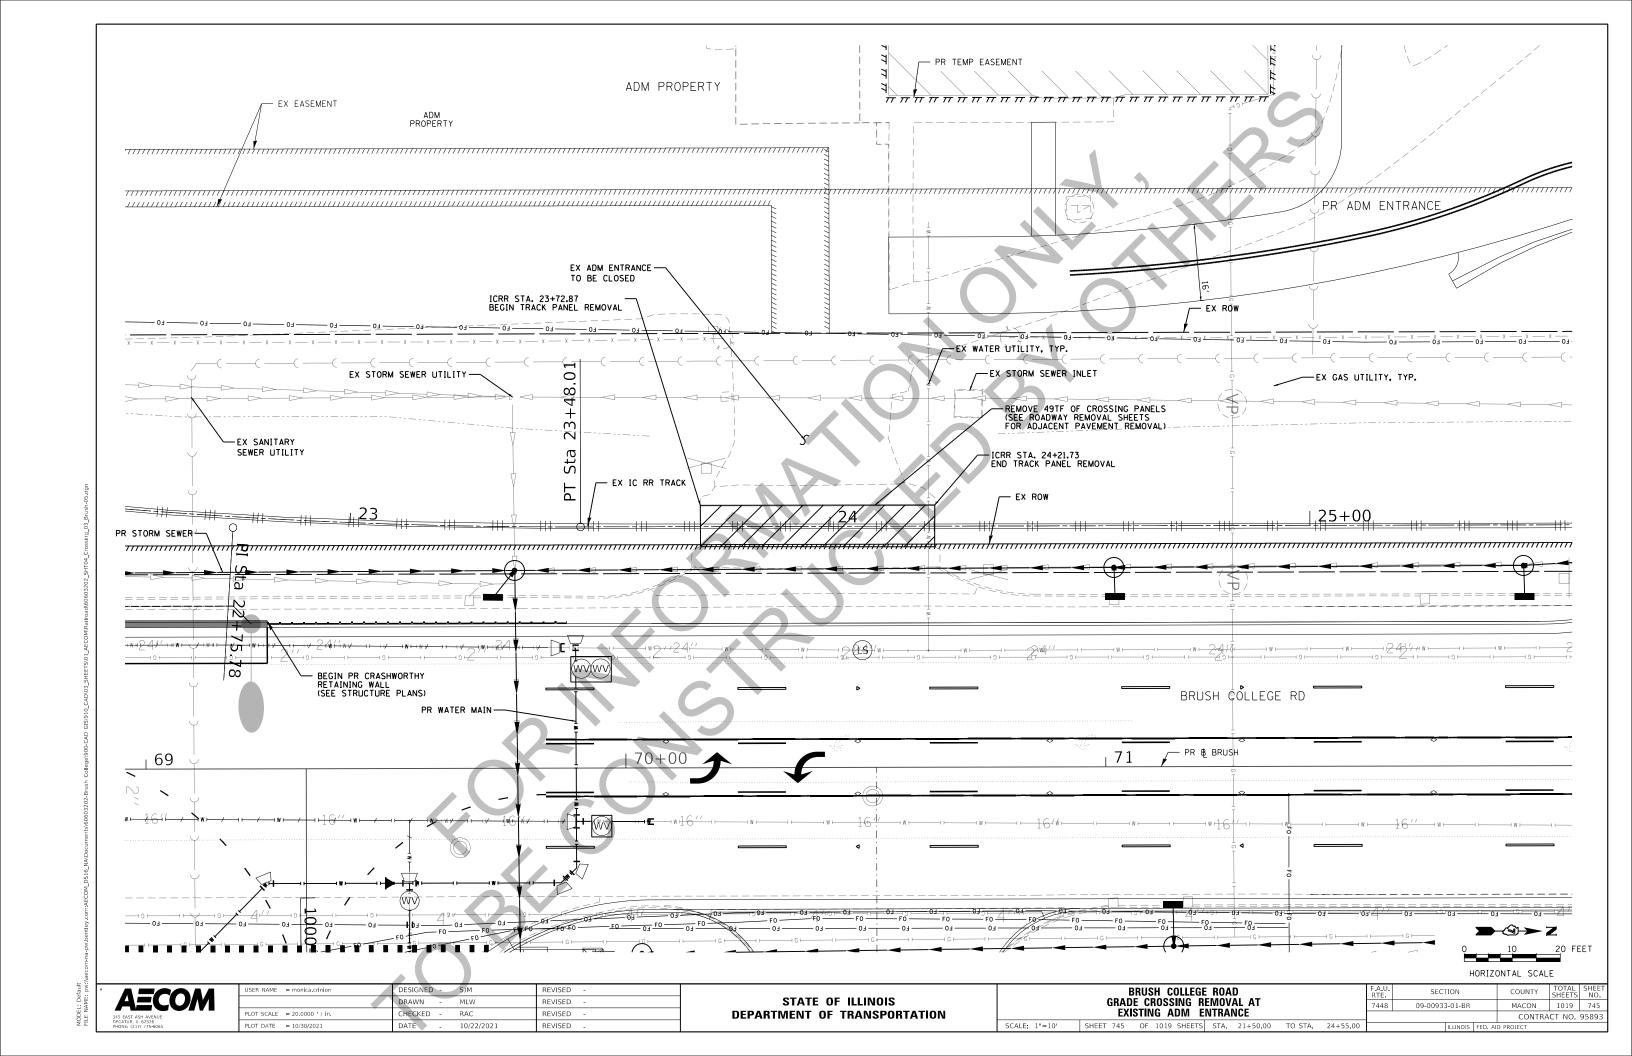


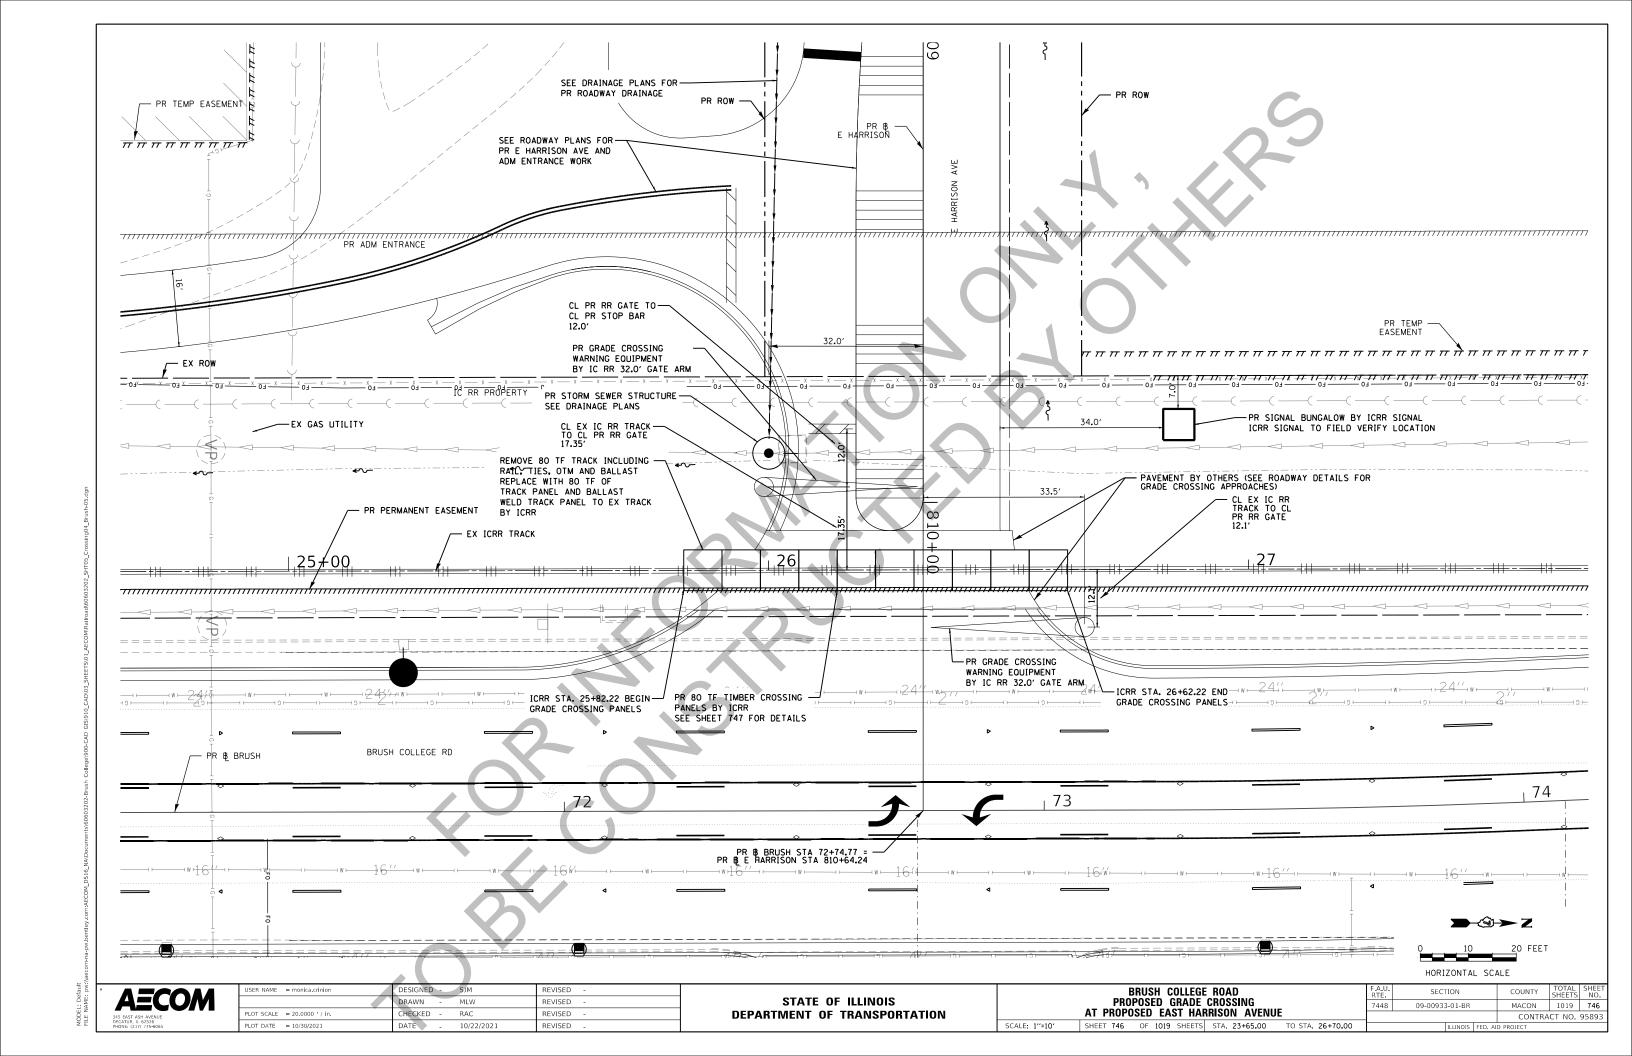

HALF SECTION SOLID TIMBER OR COMPOSITE CROSSING N.T.S.

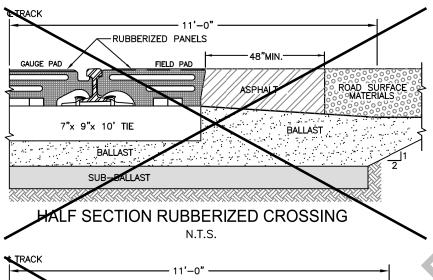

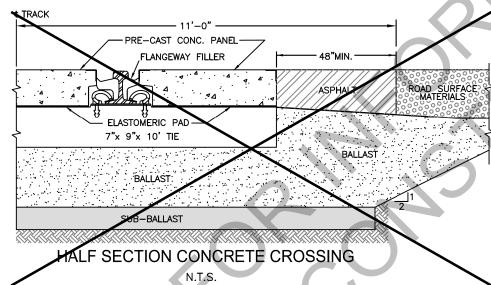

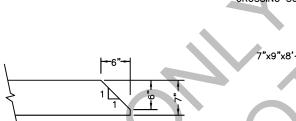



END CHAMFER DETAIL FOR WOOD CROSSING TIMBER ONLY N.T.S.


PANEL END DETAIL

CROSSING PANELS ARE TO BE BUTTED TOGETHER OVER THE & OF TIE

N.T.S.

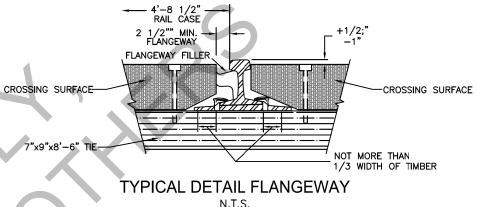

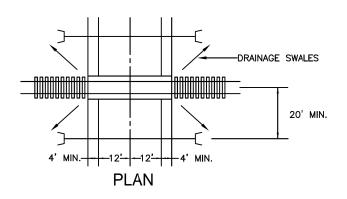


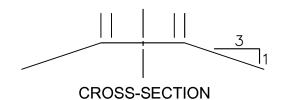

NOTES:

- 1. CROSSING LENGTH SHOULD EXTEND ENTIRE WIDTH OF USABLE SHOULDERS.
- 2. CROWN IN ROADWAY SHOULD BE ELIMINATED AT CROSSING SO AS TO MATCH GRADE AND PROFILE OF RAILROAD.
- 3. DRAINAGE CULVERTS IN TRACKSIDE DITCHES SHOULD BE APPROPRIATELY SIZED (24"MINIMUM DIAMETER) AND INSTALLED AT AN ELEVATION WHICH PERMITS UNRESTRICTED FLOW. CULVERTS SHOULD ALSO BE OF SUFFICIENT LENGTH AND/OR EQUIPPED WITH FLARED ENDS OR HEADWALLS TO PRECLUDE COLLAPSE OF ROADWAY SHOULDER AT OR AROUND CULVERT ENDS.

- 1. FASTENING TO BE WITH 5/8" DRIVE SPIKE OF A LENGTH TO PENETRATE CROSS TIE 3" OR MORE.
- 2. USE ONE FASTENING PER TIMBER PER CROSS TIE, ALTERNATE POSITION BORE TIMBER 9/16" AND COUNTERSINK PILOT BORE CROSS TIE.
- 3. FULLY ASPHALTED OR AGGREGATE CROSSINGS ARE NOT ALLOWED
- 4. CROSSINGS IN CURVES WILL NEED TIES TO BE SPACED IN RADIAL FAN ARRANGEMENT
- 5. CROSSINGS IN CURVES MAY NEED TO BE SPECIALLY ORDERED.

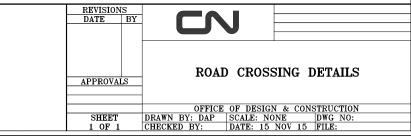


DRAWN - MLW REVISED - PLOT SCALE = 20,0000 ' / in. CHECKED - RAC REVISED -	USER NAME = stephen.moore	DESIGNED - SJM	REVISED -
PLOT SCALE = 20.0000 ' / in. CHECKED - RAC REVISED -		DRAWN - MLW	REVISED -
	PLOT SCALE = 20.0000 ' / in.	CHECKED - RAC	REVISED -
PLOT DATE = 4/26/2021 DATE - 4/30/2021 REVISED -	PLOT DATE = 4/26/2021	DATE - 4/30/2021	REVISED -


		GI	RADE	CRO	SSING	ROAD DETAILS STANDARD)	
SCALE: 1	N.T.S.	SHEET 747	OF	1019	SHEETS	STA.	TO STA.

COUNTY 7448 09-00933-01-BR MACON 1019 **747** CONTRACT NO. 95893

A19

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

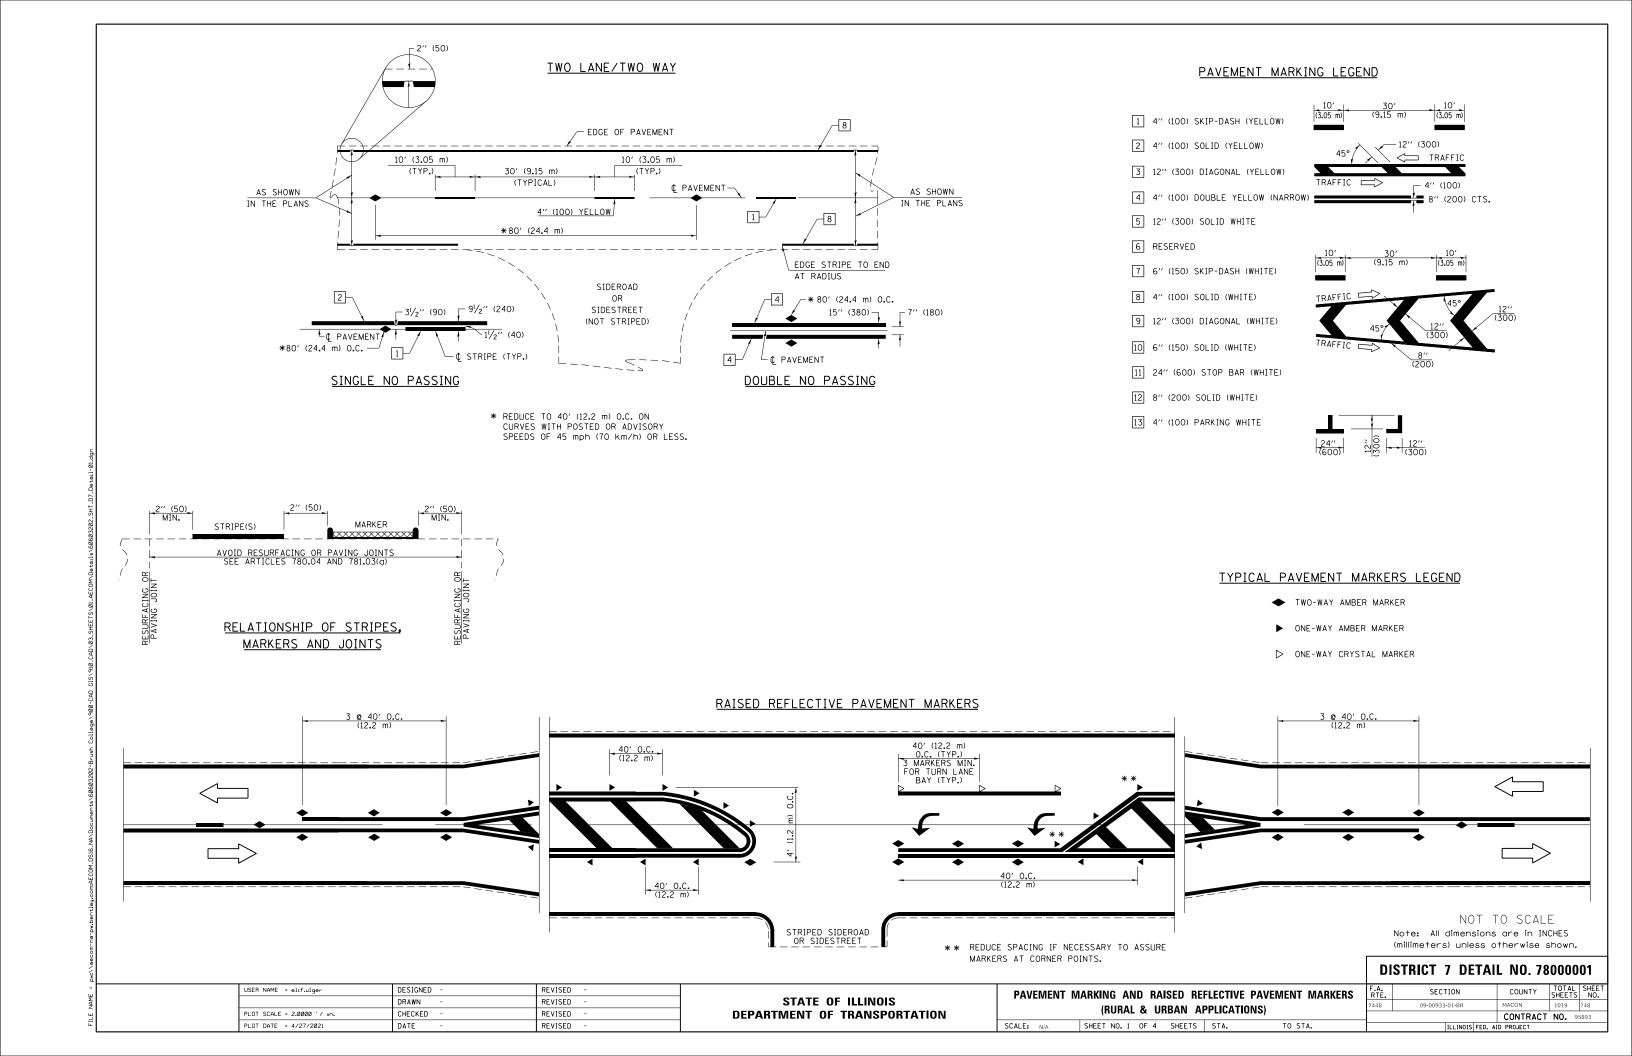

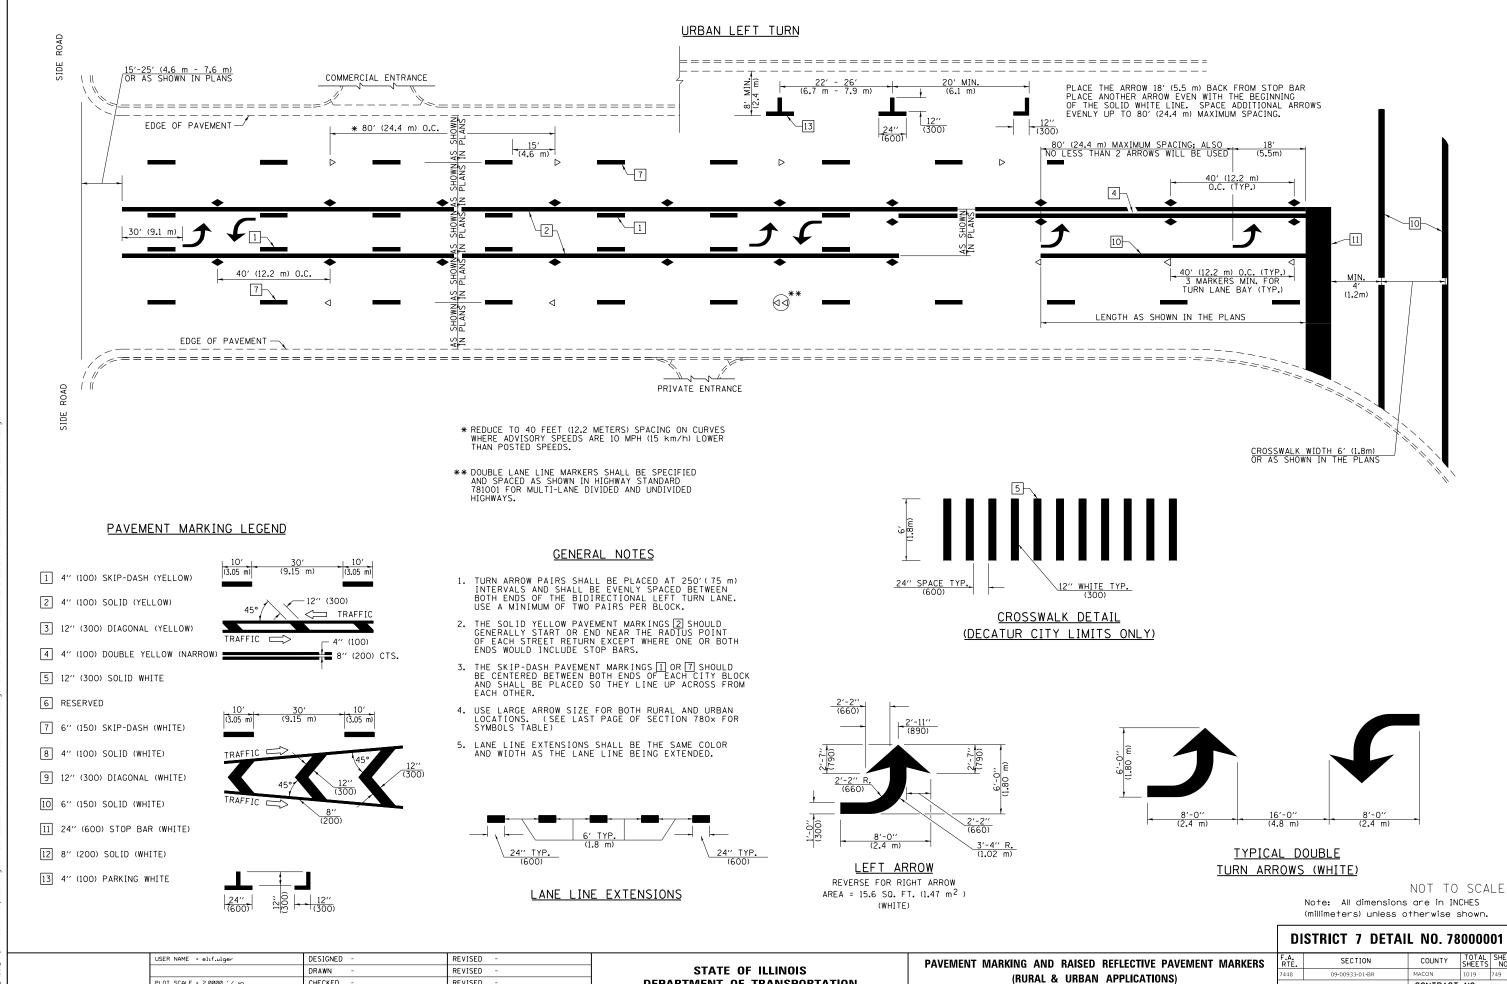

DEPARTMENT OF TRANSPORTATION

SCALE: N/A

SHEET NO. 2 OF 4 SHEETS STA.

CONTRACT NO. 95893


CHECKED

DATE

PLOT DATE = 4/27/2021

REVISED

REVISED

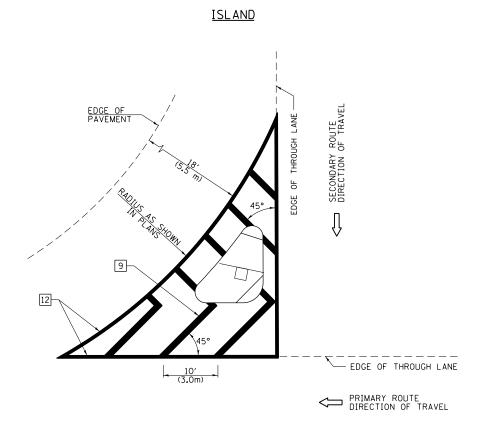

4


500' (164 m) MIN. NO PASSING ZONE 8

USER NAME = elif.ulger

PAVEMENT MARKING LEGEND

- 1 4" (100) SKIP-DASH (YELLOW)
- 2 4" (100) SOLID (YELLOW)
- 3 12" (300) DIAGONAL (YELLOW)

- 13 4" (100) PARKING WHITE

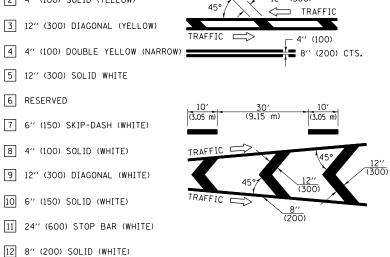



GENERAL NOTES

3. PAVEMENT MARKINGS ARE TO BE EXTENDED THROUGH OMISSIONS WHEN APPLICABLE.

THE DIAGONAL PAVEMENT MARKING SPACING:

<30 MPH (<50 km/h)

30-45 MPH (50-75 km/h >45 MPH (>75 km/h

1. RAISED AND CORRUGATED MEDIANS SHALL BE OUTLINED WITH 2 IF PRESENT.


2. SOME OF THE INFORMATION INCLUDED WITH THIS DETAIL MAY NOT BE APPLICABLE TO THIS IMPROVEMENT.

4. FINAL PAVEMENT MARKINGS SHALL BE IN PLACE PRIOR TO PLACING ANY RAISED REFLECTIVE PAVEMENT MARKERS.

5. THE FOLLOWING CRITERIA SHALL BE USED FOR SELECTING

15' (4.5 m)

20' (6.0 m) 30' (9.0 m)

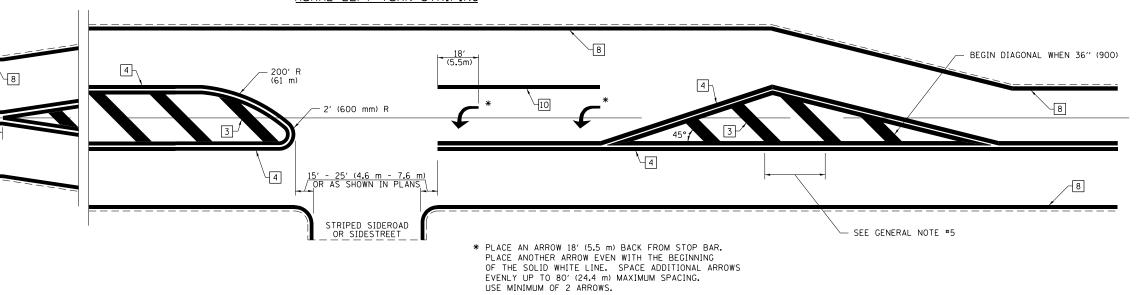

NOT TO SCALE

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

DISTRICT	7	DETAIL	NO.	78000001
----------	---	---------------	-----	----------

DRAWN REVISED CHECKED REVISED PLOT DATE = 4/27/2021 DATE REVISED


REVISED

DESIGNED


STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION** PAVEMENT MARKING AND RAISED REFLECTIVE PAVEMENT MARKERS (RURAL & URBAN APPLICATIONS) SHEET NO. 3 OF 4 SHEETS STA.

SECTION COUNTY CONTRACT NO. 95893




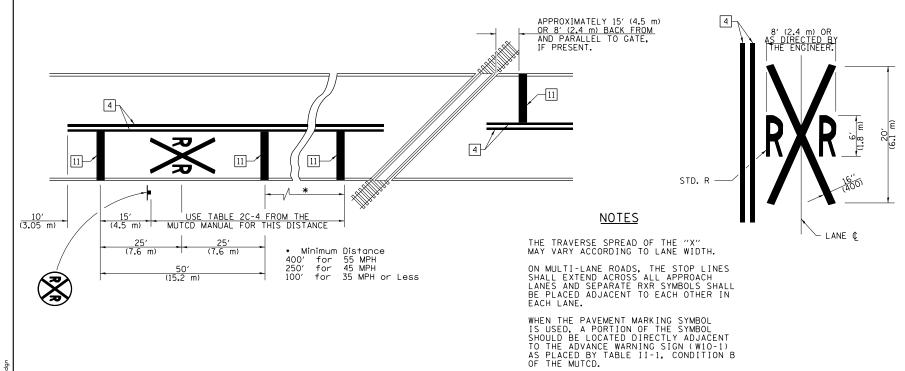


PAVEMENT MARKING LEGEND

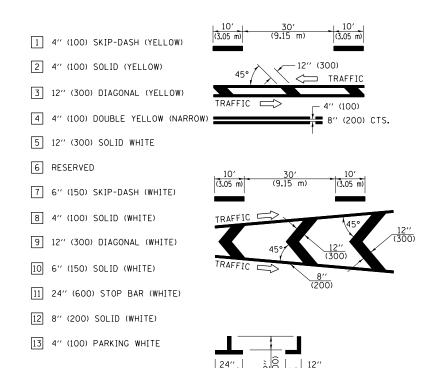

RAILROAD CROSSING WITH INTERCONNECT ONLY

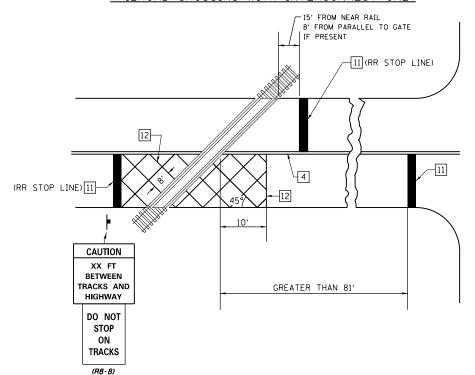

RAILROAD CROSSING WITH INTERCONNECT AND PRE-SIGNALS

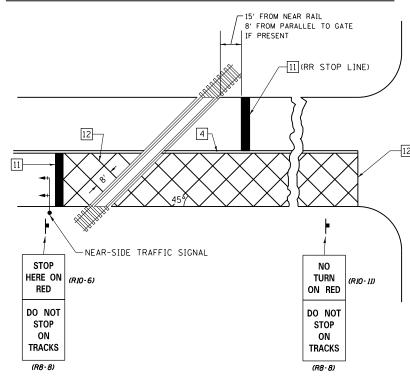

SUPPLEMENTAL PAVEMENT MARKING TREATMENT FOR RAILROAD-HIGHWAY GRADE CROSSING

GENERAL NOTES

- 1. SUPPLEMENTAL PAVEMENT MARKINGS TO BE INSTALLED ONLY ON APPROACHES TO INTERSECTIONS CONTROLLED BY TRAFFIC SIGNALS WHICH ARE INTERCONNECTED WITH THE RAILROAD WARNING SIGNALS.
- 2. EXTEND PAVEMENT MARKINGS TO THE INTERSECTION ONLY WHERE NEAR-SIDE TRAFFIC SIGNALS ARE USED.

NOT TO SCALE


1019 751


Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

DISTRICT	7	DETAIL	NO.	78000001

DESIGNED REVISED USER NAME = elif.ulger SECTION COUNTY PAVEMENT MARKING AND RAISED REFLECTIVE PAVEMENT MARKERS STATE OF ILLINOIS DRAWN REVISED (RURAL & URBAN APPLICATIONS) PLOT SCALE = 2.0000 '/ in. CHECKED REVISED **DEPARTMENT OF TRANSPORTATION** CONTRACT NO. 95893 SCALE: N/A SHEET NO. 4 OF 4 SHEETS STA. TO STA. PLOT DATE = 4/27/2021 DATE REVISED

TYPICAL PLACEMENT OF PRISMATIC CURB REFLECTORS

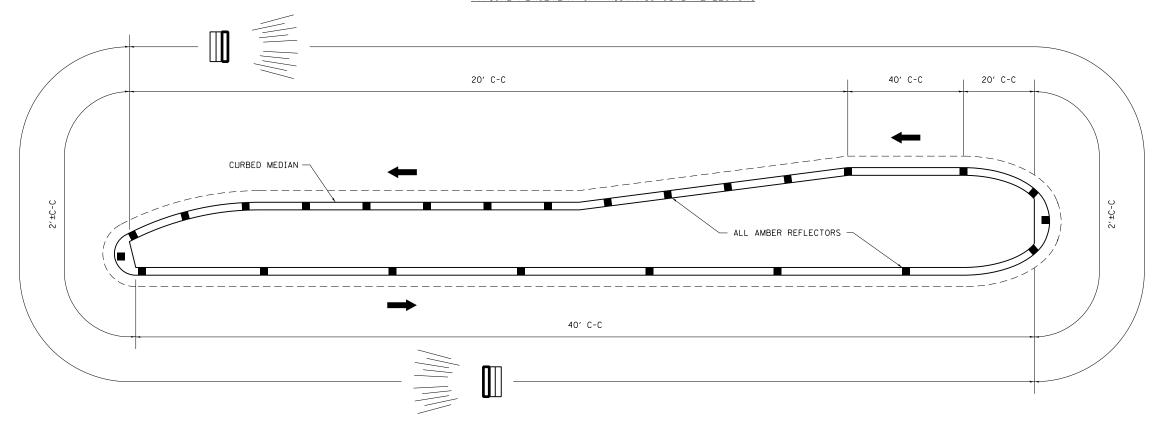





3. PRISMATIC REFLECTORS SHALL BE EITHER AMBER OR CRYSTAL IN COLOR.

<u>LEGEND</u>

- 4. REFER TO SCHEDULES FOR PRISMATIC REFLECTOR QUANTITIES.
- 5. USE A MINIMUM OF 3 REFLECTORS ON ISLAND NOSES.

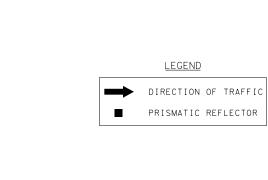

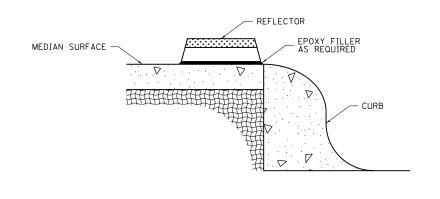

SECTION VIEW


NOT TO SCALE

	DIST	RICT	7	DETAIL	NO.	7820030	0
--	------	------	---	--------	-----	---------	---

	USER NAME = elif.ulger	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION					F.A. RTE.	SECTION	COUNTY	TOTAL SHEE SHEETS NO.	Ē.
		DRAWN -	REVISED -		PRISMATIC CURB REFLECTOR			7448	09-00933-01-BR	MACON	1019 752		
	PLOT SCALE = 2.0000 '/ in.	CHECKED -	REVISED -					_		CONTRACT	NO. 95893	0. 95893	
	PLOT DATE = 4/27/2021	DATE -	REVISED -		SCALE: N/A	SHEET NO. 1 OF 1 SHEETS	STA.	TO STA.	FED. ROAD	DIST. NO. ILLINOIS FED. AI	PROJECT		

CURBED CORNER ISLAND -

ALL CRYSTAL REFLECTORS

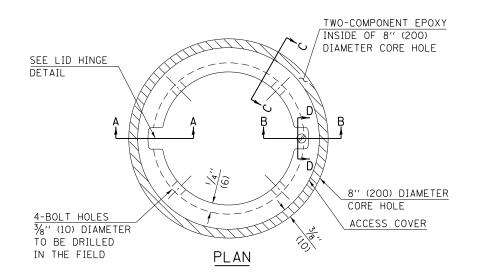

LEGEND

- ALUMINUM CASTING

- 5" (125) OR 6" (150) P.V.C. PIPE


- TWO-COMPONENT EPOXY

T = THICKNESS OF PAVEMENT STRUCTURE


H = THE THICKNESS OF THE SUB-BASE GRANULAR + 1" (25)


BILL OF MATERIAL

ALUMINUM CASTING OF THE DIMENSIONS AND SPECIFICATIONS SHOWN OR OTHER SUBJECT TO ENGINEER'S APPROVAL OF SHOP DRAWINGS, 4 EACH - \(\frac{1}{16} \) ' X 2" (M8 X 50) BOLTS WITH NUTS, EPOXY, 5" OR 6" (125 mm OR 150 mm) DIAMETER P.V.C. PIPE, SCHEDULE 40 (WHEN REQUIRED).



SECTION C-C

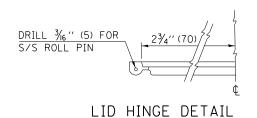

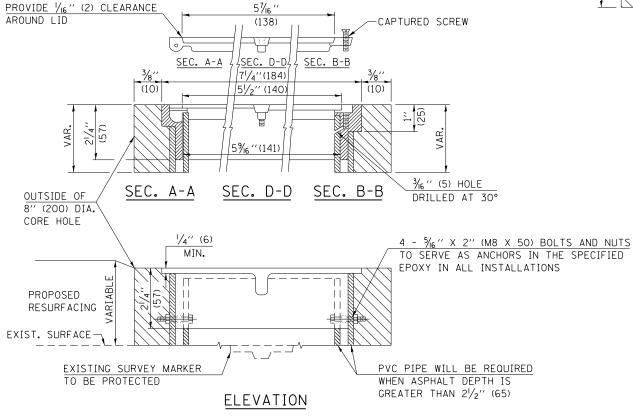

ALUMINUM CASTING DRILL CUT PAVEMENT STRUCTURE ALUMINUM TABLET FINE AGGREGATE FA-01/02 EXISTING SUB-BASE OR SUB-GRADE 5" (125) P.V.C. PIPE 6" (150) P.V.C. PIPE PLASTIC INSULATOR FOR -#5 X 48 (#15 X 1.2 m) CORROSION PREVENTION ELEVATION

EXISTING SURVEY MARKER

PROPOSED SURVEY MARKER

NOT TO SCALE

Note: All dimensions are in INCHES
(millimeters) unless otherwise shown.

								DISTRICT 7 DETAIL NO. Z0070202					
USER NAME = elif.ulger	DESIGNED -	REVISED - MAD 6-11					F.A.	SECTION	COUNTY	TOTAL	SHEET		
	DRAWN -	REVISED -	STATE OF ILLINOIS	SURVEY MARKER VAULT			7448	09-00933-01-BR	MACON	1019	752A		
PLOT SCALE = 2.000 ' / in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION							CONTRAC	CONTRACT NO. 95893		
PLOT DATE = 4/27/2021	DATE -	REVISED -		SCALE: N/A	SHEET NO. 1 OF 1 SHEETS	STA.	TO STA.	FED. ROA	D DIST. NO. ILLINOIS FED.	AID PROJECT			

