

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
345	98-00153-02-BR	DUPAGE	65	12
STA. 101+25.00		TO STA. 114+00.00		
FED. ROAD DIST. NO. 1		ILLINOIS FED. AID PROJECT		

CONTRACT NO. 63077

40600982 HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT SQ YD

STATION	OFFSET	STATION	OFFSET	UNIT
101+25.00				14
114+15.53				20
TOTAL QUANTITY:				34

44000100 PAVEMENT REMOVAL SQ YD

STATION	WIDTH	STATION	WIDTH	UNIT
101+25.00	64.0	106+32.42	64.0	3608
108+10.91	48.0	108+54.43	48.0	232
108+54.43	48.0	109+59.89	51.6	584
109+59.89	51.6	109+72.68	54.2	75
109+72.68	54.2	112+00.00	62.1	1,469
TOTAL QUANTITY:				5,968

50105220 PIPE CULVERT REMOVAL FOOT

STATION	OFFSET	STATION	OFFSET	UNIT
101+40.04	25.0RT	106+58.17	25.0RT	518
101+41.60	46.0RT	106+81.59	43.0RT	540
TOTAL QUANTITY:				1,058

40603240 POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N90 TON

STATION	WIDTH (FT)	STATION	WIDTH (FT)	UNIT
101+25.00	64.9	101+59.00	64.9	172
101+59.00	64.0	103+15.73	64.0	780
103+15.73	64.0	104+35.73	60.0	579
104+35.73	60.0	106+23.17	60.0	875
108+11.83	60.0	112+00.00	60.0	1,811
112+00.00	60.0	112+79.00	60.0	59
112+79.00	80.0	114+00.00	90.2	128
TOTAL QUANTITY:				4,404

44000165 HOT-MIX ASPHALT SURFACE REMOVAL, 4" SQ YD

STATION	WIDTH	STATION	WIDTH	UNIT
112+00.00	60	112+65.00	60	433
112+65.00	60	114+00.00	70.2	977
TOTAL QUANTITY:				1,410

550A0050 STORM SEWERS, CLASS A, TYPE 1 12" FOOT

STATION	OFFSET	STATION	OFFSET	UNIT
105+00.0	30.0 LT	104+00.00	30.6 LT	100
104+00.0	30.6 LT	104+00.00	42.4 LT	12
110+68.0	30.0 LT	110+30.00	30.0 LT	38
111+06.00	30.0 LT	110+68.00	30.0 LT	38
111+85.00	30.0 LT	111+06.00	30.0 LT	79
102+75.0	32.0 RT	103+00.00	32.0 RT	25
104+00.0	30.6 RT	103+00.00	32.0 RT	100
105+00.0	30.0 RT	104+00.00	30.6 RT	100
109+25.0	30.0 RT	109+78.00	30.0 RT	53
109+78.0	30.0 RT	110+30.00	30.0 RT	52
110+30.0	31.0 RT	110+68.00	30.0 RT	38
111+06.00	30.0 RT	110+68.00	30.0 RT	38
111+85.00	30.0 RT	111+06.00	30.0 RT	79
TOTAL QUANTITY:				752

40603595 POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90 TON

STATION	OFFSET	STATION	OFFSET	UNIT
101+25.00	64.9	101+59.00	64.9	27
101+59.00	64.0	103+15.73	64.0	125
103+15.73	64.0	104+35.73	60.0	93
104+35.73	60.0	106+23.17	60.0	140
108+11.83	60.0	112+00.00	60.0	290
112+00.00	60.0	112+79.00	60.0	59
112+79.00	80.0	114+00.00	90.2	128
TOTAL QUANTITY:				862

44000200 DRIVEWAY PAVEMENT REMOVAL SQ YD

STATION	OFFSET	STATION	OFFSET	UNIT
101+84.00	LT 32	103+57.75	LT 31	332
TOTAL QUANTITY:				332

550A0070 STORM SEWERS, CLASS A, TYPE 1 15" FOOT

STATION	OFFSET	STATION	OFFSET	UNIT
109+15.0	30.0 LT	109+15.00	46.0 LT	16
109+78.0	30.0 LT	109+15.00	30.0 LT	63
110+30.0	30.0 LT	109+78.00	30.0 LT	52
103+00.0	32.0 RT	103+00.00	43.0 RT	11
110+68.0	30.0 RT	110+68.00	46.0 RT	16
TOTAL QUANTITY:				158

42300400 PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 8 INCH SQ YD

STATION	WIDTH	STATION	WIDTH	UNIT
102+00.00	LT 34.5	103+48.45	LT 34	284
TOTAL QUANTITY:				284

44000500 COMBINATION CURB AND GUTTER REMOVAL FOOT

STATION	OFFSET	STATION	OFFSET	UNIT
101+59.43	LT 32	102+73.80	LT 32	117
102+00.00	LT 32	103+48.47	LT 32	83
TOTAL QUANTITY:				200

550A0380 STORM SEWERS, CLASS A, TYPE 2 18" FOOT

STATION	OFFSET	STATION	OFFSET	UNIT
101+40.0	25.13RT	101+40.04	32.00RT	7
101+40.0	32.00RT	101+41.60	39.81RT	8
TOTAL QUANTITY:				15

44004250 PAVED SHOULDER REMOVAL SQ YD

STATION	OFFSET	STATION	OFFSET	UNIT
100+79.00	RT 32.00	101+25	RT 32.00	40
NON PARTICIPATING:				40
101+25.00	LT	102+12.17	LT	56
100+79.00	RT	103+88.87	RT	234
TOTAL I000				290
TOTAL QUANTITY:				329

550A0450 STORM SEWERS, CLASS A, TYPE 2 36" FOOT

STATION	OFFSET	STATION	OFFSET	UNIT
101+41.6	39.81RT	104+86.56	43.86LT	345
104+86.5	43.86RT	106+65.56	43.86LT	179
TOTAL QUANTITY:				524

48203029 HOT-MIX ASPHALT SHOULDERS, 8" SQ YD

STATION	WIDTH (FT)	STATION	WIDTH (FT)	UNIT
101+25.00	LT 8	101+59.00	LT 8	30
TOTAL QUANTITY:				30

PLAN


DATE	
BY	
CHECKED	
DESIGNED	
PLOTTED	
REVISIONS	
FILE NAME	
NO.	

PROFILE

DATE	
BY	
CHECKED	
DESIGNED	
PLOTTED	
REVISIONS	
FILE NAME	
NO.	

PLOT DATE = 11/2/2008  
 PLOT SCALE = 1"=40'  
 PLOT USER = MS  
 PLOT USER = MS

\$\$\$GN\$\$  
 \$\$\$PRF\$\$

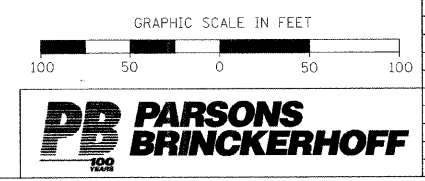

REVISIONS

NAME	DATE
M. SHAH	11/06/08

DUPAGE COUNTY DIVISION OF TRANSPORTATION  
 THORNDALE AVENUE OVER SALT CREEK

SCHEDULE OF QUANTITIES

SCALE: DATE 09-05-08 DRAWN BY MS CHECKED BY RH