01-30-15 LETTING ITEM 076

FOR INDEX OF SHEETS, SEE SHEET NO. 2

STATE OF ILLINOIS

DEPARTMENT OF TRANSPORTATION

DIVISION OF HIGHWAYS

DESIGN DESIGNATION: OTHER PRINCIPAL ARTERIAL

SPEED LIMIT: 35 TO 40 M.P.H.

PROJECT LOCATED IN THE VILLAGE OF NILES AND THE

VILLAGE OF GLENVIEW

2013 ADT = 32,300

0

 \circ

0

0

PROPOSED HIGHWAY PLANS


F.A.P. 374 / F.A.U 3513 IL 21 (MILWAUKEE AVENUE)
SECTION: (211K, 211Y) RS-2
HARTS ROAD TO GLENVIEW ROAD
RESURFACING (3P)

COOK COUNTY C-91-427-14

NORTHFIELD, MAINE AND NILES TOWNSHIP R. 12 E.

GROSS LENGTH OF PROJECT = 26,924.00 FEET = 5.099 MILES

NET LENGTH OF PROJECT = 26.924.00 FEET = 5.099 MILES

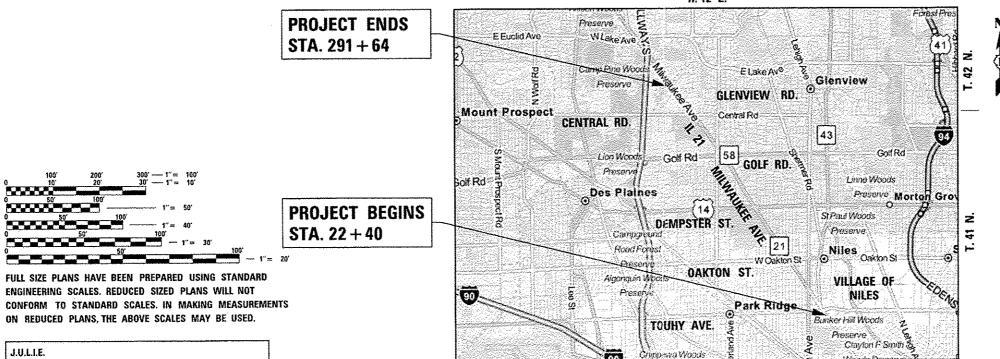

J.U.L.I.E. JOINT UTILITY LOCATING INFORMATION FOR EXCAVATORS 1–800–892–0123 OR 811

DISTRICT ONE – DESIGN
PROJECT MANAGER: ISSAM RAYYAN (847) 705–4178
PROJECT ENGINEER: ROBERT T. BORO (847) 705–4237

CONTRACT NO. 60Y55


DESIGN SECTION ENGINEER:




CHRISTIAN-ROGE & ASSOCIATES, INC. ENGINEERS - PLANNERS - SURVEYORS 211 W. WACKER DRIVE CHICAGO, IL. 60606 TELEPHONE: 312-372-2023 374 (211K, 211Y) RS-2 COOK, WZ 1
FED. ROAD DIST. NO. 1 | ILLINOIS CUNTRACT NO. 60Y55

D-91-427-14



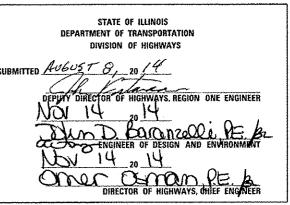



PRINTED BY THE AUTHORITY OF THE STATE OF ILLINOIS

INDEX OF SHEETS

1	COVER SHEET
2	INDEX OF SHEETS, LIST OF STATE STANDARDS AND GENERAL NOTES
3-8	SUMMARY OF QUANTITIES
9 - 10	TYPICAL SECTIONS
11 - 20	ROADWAY PLAN
21 - 30	PAVEMENT MARKING PLANS
31 - 47	DETECTOR LOOP REPLACEMENT PLANS
48	DRIVEWAY DETAILS - DISTANCE BETWEEN R.O.W. AND FACE OF CURB & EDGE OF SHOULDER >= 15' (80-01)
49	DRIVEWAY DETAILS - DISTANCE BETWEEN R.O.W. AND FACE OF CURB < 15' (BD-02)
50	DETAILS FOR FRAMES AND LIDS ADJUSTMENT WITH MILLING (8D-08)
51	PAVEMENT PATCHING FOR HMA SURFACED PAVEMENT (BD-22)
52	CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT (BD-24)
53	BUTT JOINT AND HMA TAPER DETAILS (BD-32)
54	HMA TAPER AT EDGE OF P.C.C. PAVEMENT (8D-33)
55	TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS AND DRIVEWAYS (TC-10)
56	TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS (SNOW PLOW RESISTANT) (TC-11)
57	DISTRICT ONE TYPICAL PAVEMENT MARKINGS (TC-13)
58	TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC) (TC-14)
59	PAVEMENT MARKING LETTERS AND SYMBOLS FOR TRAFFIC STAGING (TC-16)
60	ARTERIAL ROAD INFORMATION SIGN (TC-22)
61	DRIVEWAY ENTRANCE SIGNING (TC-26)

DISTRICT | DETECTOR LOOP INSTALLATION DETAILS FOR ROADWAY RESURFACING (TS-07)

HIGHWAY STANDARDS

62

	MONTH STANDARDS
SIANDARD NO.	DESCRIPTION
000001-06	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
424001- DB	PERPENDICULAR CURB RAMPS FOR SIDEWALKS
424006-02	DIAGONAL CURB RAMPS FOR SIDEWALKS
424011- 02	CORNER PARALLEL CURB RAMPS FOR SIDEWALKS
424016-02	MID-BLOCK CURB RAMPS FOR SIDEWALKS
424021-03	DEPRESSED CORNER FOR SIDEWALK
424026-01	ENTRANCE / ALLEY PEDESTRIAN CROSSINGS
424031-01	MEDIAN PEDESTRIAN CROSSINGS
442201-03	CLASS C AND D PATCHES
604001-04	FRAME AND LIDS, TYPE 1
604086-03	FRAME AND GRATE TYPE 23
604091-03	FRAME AND GRATE TYPE 24
606001-06	CONCRETE CURB TYPE B AND COMBINATION CONCRETE CURB AND GUTTER
701101-04	OFF-RD OPERATIONS, MULTILANE, 15' TO 24' FROM PAVEMENT EDGE
701427-03	LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATION, FOR SPEEDS < OR = 40 MPH
701601-09	URBAN LANE CLOSURE, MULTILANE, 1W OR 2W WITH NONTRAVERSABLE MEDIAN
701602-07	URBAN LANE CLOSURE, MULTILANE, 2W WITH BIDIRECTIONAL LEFT TURN LANE
701606-09	URBAN LANE CLOSURE, MULTI LANE, 2W WITH MOUNTABLE MEDIAN
701701-09	URBAN LANE CLOSURE, MULTI LANE INTERSECTION
701801-05	SIDEWALK, CORNER OR CROSSWALK CLOSURE
701901-03	TRAFFIC CONTROL DEVICES
814001-02	HANDHOLES
886001-01	DETECTOR LOOP INSTALLATIONS
886006-01	TYPICAL LAYOUT FOR DETECTION LOOPS

GENERAL NOTES

- 1. BEFORE STARTING ANY EXCAVATION, THE CONTRACTOR SHALL CALL "JULIE" AT (800) 892-0123 OR 811 AND "C.U.A.N." AT (312) 744-7000 FOR FIELD LOCATIONS OF BURIED ELECTRIC, TELEPHONE AND GAS FACILITIES. (48 HOUR NOTIFICATION IS REQUIRED)
- 2. BEFORE BEGINNING ANY WORK, THE CONTRACTOR SHALL RETAIN AND RECORD FOR FUTURE REFERENCE ALL EXISTING PAVEMENT MARKING LINES AND RAISED REFLECTIVE PAVEMENT MARKERS IN ORDER THAT THESE LOCATIONS CAN BE RE-ESTABLISHED FOR STRIPING. EXACT LOCATIONS OF ALL PAVEMENT MARKING SHALL BE AS DIRECTED BY THE ENGINEER.
- 3. PAVEMENT MARKING TAPE, TYPE III SHALL BE USED FOR SHORT TERM PAVEMENT MARKING AND TEMPORARY PAVEMENT MARKING ON ALL FINAL SURFACES. THE COST OF THE PAVEMENT MARKING TAPE TYPE III SHALL BE INCLUDED IN THE COST OF SHORT TERM PAVEMENT MARKINGS AND TEMPORARY PAVEMENT MARKINGS.
- 4. LOCATIONS OF PAVEMENT PATCHING AND CURB AND GUTTER REMOVAL AND REPLACEMENT WILL BE AS DETERMINED BY THE ENGINEER AND AS SHOWN ON THE PLANS.
- 5. 10 FEET TRANSITIONS SHALL BE USED TO MATCH PROPOSED CURB AND GUTTER ITEMS OF WORK TO EXISTING CURBS AND GUTTERS AND CONDITIONS IN THE FIELD UNLESS OTHERWISE SHOWN. THE TRANSITIONS SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE FOR THE PROPOSED ITEMS OF WORK SPECIFIED.
- 6, THE CONTRACTOR SHALL COORDINATE CONSTRUCTION ACTIVITIES WITH UTILITY COMPANIES AND THE VILLAGE OF NILES AND THE VILLAGE OF GLENVIEW.
- 7. WHEN ARTIFICIAL LIGHTING IS USED IN NIGHT OPERATIONS, THE CONTRACTOR SHALL EXERCISE THE UTMOST PRECAUTIONS IN PREVENTING ADVERSE VISIBILITY TO THE MOTORING PUBLIC AND ADJOINING RESIDENTIAL AREAS.
- 8. THE CONTRACTOR WILL NOT BE ALLOWED TO SET UP A YARD OR FIELD OFFICE ON STATE PROPERTY WITHOUT WRITTEN PERMISSION FROM THE DEPARTMENT.
- 9. SAW CUTTING PRIOR TO ANY REMOVAL ITEMS NOTED ON THE PLANS OR DIRECTED BY THE ENGINEER SHALL BE CONSIDERED INCLUDED IN THE COST OF THE ITEMS BEING REMOVED.
- 10. DO NOT SCALE PLANS FOR CONSTRUCTION DIMENSIONS.
- 11. THE CONTRACTOR SHALL USE CARE IN REMOVING OR EXCAVATING NEAR ALL EXISTING ITEMS WHICH WILL REMAIN. ANY DAMAGE DONE TO EXISTING ITEMS BY THE CONTRACTOR SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE,
- 12. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONTACTING OWNERS OF ALL UTILITYES PRIOR TO CONSTRUCTION TO DETERMINE THE LOCATION OF ALL UTILITY EQUIPMENT. THE CONTRACTOR SHALL COOPERATE WITH ALL UTILITY OWNERS IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS IF UTILITY RELOCATION, ADJUSTMENT, OR PROTECTION IS NECESSARY.
- 13. THE LOCATION OF EXISTING DRAINAGE STRUCTURES, STORM SEWERS, WATER MAINS. SANITARY SEWERS, AND ANY OTHER PUBLIC OR PRIVATE UTILITIES AS SHOWN ON THE PLANS IS APPROXIMATE AND THEIR EXACT LOCATION IS TO BE DETERMINED IN THE FIELD BY THE CONTRACTOR.
- 14. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL UNDERGROUND AND SURFACE UTILITIES EVEN THOUGH THEY MIGHT NOT BE SHOWN ON THE PLANS. ANY UTILITY PROPERTY DAMAGED DURING CONSTRUCTION SHALL BE REPAIRED OR REPLACED TO THE SATISFACTION OF THE ENGINEER.
- 15. ANY LOOSE MATERIAL DEPOSITED IN THE FLOW LINE OF DRAINAGE STRUCTUES. WHICH OBSTRUCTS THE NATURAL FLOW OF WATER SHALL BE REMOVED AT THE CLOSE OF EACH WORKING DAY. PRIOR TO ACCEPTANCE OF THE IMPROVEMENT, ALL DRAINAGE STRUCTURES SHALL BE FREE OF DIRT AND DEBRIS. THIS WORK WILL NOT BE PAID FOR SEPARATELY, BUT SHALL BE CONSIDERED AS INCLUDED IN THE UNIT BID PRICES OF THE CONTRACT.
- 16. WHEN MILLED PAVEMENT IS OPEN TO TRAFFIC, THE MAXIMUM GRADE DIFFERENTIAL BETWEEN PASSES OF THE MILLING MACHINE SHALL NOT EXCEED 11/2 INCHES (40mm) WHERE THE SPEED LIMIT IS 40 MPH OR LESS AND 1 INCH WHERE THE SPEED LIMIT IS GREATER THAN 45 MPH, WITH WRITTEN APPROVAL FROM THE ENGINEER, A MAXIMUM GRADE DIFFERENTIAL OF 3 INCHES MAY BE ALLOWED IF THE EDGE OF THE MILLING IS SLOPED A MINIMUM 1:3 (V:H).
- 17. UNLESS OTHER CONDITIONS WARRANT EXTENDED LANE CLOSURE AS DETERMINED AND APPROVED IN WRITING BY THE ENGINEER OR AS PROVIDED FOR IN THE CONTRACT SPECIFICATIONS, OVERNIGHT CLOSURES SHALL NOT BE ALLOWED FOR REHABILITATION PROJECTS INVOLVING DAYTIME MILLING AND RESURFACING OPERATIONS AND CLASS D PATCHING.
- 18. THE CONTRACTOR SHALL CONTACT THE TRAFFIC CONTROL SUPERVISOR AT (847) 705-4470 A MINIMUM OF 72 HOURS IN ADVANCE OF BEGINNING WORK.
- THE NORTH COOK

 19. THE CONTRACTOR SHALL CONTACT MR. WALTER-GZARNY, THE AREA TRAFFIC FIELD ENGINEER, AT 1700) 597-9800 AT LEAST TWO (2) WEEKS PRIOR TO THE PLACEMENT OF PERMANENT PAVEMENT MARKINGS.
- 20. BUTT JOINTS WILL BE INSTALLED AT THE ENDS OF ALL RESURFACING (WHERE RESURFACING MEETS EXISTING PAVEMENT), IN ACCORDANCE WITH THE "BUTT JOINT AND HMA TAPER DETAILS" INCLUDED IN THE PLANS, UNLESS OTHERWISE SPECIFIED.
- 21. REFER TO THE DISTRICT ONE TYPICAL PAVEMENT MARKINGS AND TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS FOR DETAILS NOT SHOWN.
- 22. MATCH EXISTING PAVEMENT MARKINGS AT THE PROJECT AND OMISSION LIMITS.
- 23. ALL DAMAGE TO EXISTING PAVEMENT MARKINGS OUTSIDE THE REMOVAL LINE SHOWN ON THE PLANS SHALL BE REPLACED AT THE CONTRACTOR'S EXPENSE.
- 24. TEMPORARY RAMPS AT BUTT JOINTS SHALL BE INCLUDED IN THE COST OF THE BUTT JOINT AS SHOWN ON THE BUTT JOINT DETAIL SHEET.

EILE HAME <	USER NAME : Hiptockg	DESIGNED -	REVISED -		INDEX OF CI	HEELG 1161	OF STAT	TE STANDARDS AN	IN CENERAL NOTES	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEET SHEETS NO.
1:\103111-IL Zi Resurfacing\CADD Sheats\Di	8YS5-sht-gennate.dgn	DRAWN -	REVISED -	STATE OF ILLINOIS	HADEA OF SI	INDEX OF SHEETS, LIST OF STATE STANDARDS AND GENERAL MILWAUKEE AVENUE				374	(211K, 211Y) RS-2	COOK	62 2
	PLOT SEALE = 20.0000 1/ in.	CHECKED -	REVISEO -	DEPARTMENT OF TRANSPORTATION			1111111111					CONTRAC	T NO. 60Y55
SHT_DOUBLE PLAN	PLOT DATE = 8/25/2014	DATE -	REVISED -		SCALE:	SHEET	OF	SHEETS STA.	TO STA.	1	ILLINOIS FEO. A	NO PROJECT	

	0114 14 1 D 1 0 T 01 1 1 1 T T T T			- CONSTRUCTION CODE						
	SUMMARY OF QUANTITIES									
			URBAN	0005						
CODE	ITEM	UNIT	TOTAL	ROADWAY						
NO.	1 C 1 1 1 1 1 1 1 1	****	QUANTITY	100% STATE						
		Arean Arean								
20200100	EARTH EXCAVATION	CUYD	34	34						
		Annual desiration of the second of the secon								
21101615	TOPSOIL FURNISH AND PLACE, 4"	SQ YD	753	753	-					
		-			Transition of the Control of the Con					
95000400	NITROGREN FERTILIZER NUTRIENT	POUND-	10	10	-					
20000700										
accoron		POUND	10-	10						
23000300	PHOSPHORUS FERTILIZER NUTRIENT	700,40	10	10						
				A 1	A CONTRACTOR OF THE CONTRACTOR					
25000600	POTASSIUM FERTILIZER NUTRIENT	POUND	10	10						
25200110	SODDING, SALT TOLERANT	SQ YD	753	753						
				and Argentine State of the Stat						
25200200	SUPPLEMENTAL WATERING	UNIT	7	7						
35501306	HOT-MIX ASPHALT BASE COURSE, 6"	TON	50	50	Verent and the second s					
40600275	BITUMINOUS MATERIALS (PRIME COAT)	POUND	129,486	129,486	And the second s					
35501316	HOT-MIX ASPHALT BASE COURSE, 8"	TON	150	150	and the second s					
40600400	MIXTURE FOR CRACKS, JOINTS, AND FLANGEWAYS	TON	300	300	A visit of the second s					
40600827	POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50	TON	7962	7962						
40600895	OONSTRUCTING TEST STRIP	EACH	2	2						
40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQ YD	4,580	4,580						
7,00002		-	.,,	,,						
4000000	DOOT! AND CENTRAL CONCRETE SUBSEACE DEMONAL PURT JOINT	SQ YD	57	57		 				
40000300	PORTLAND CEMENT CONCRETE SURFACE REMOVAL - BUTT JOINT	30 10	Ų!	9						
				4						
40601005	HOT-MIX ASPHALT REPLACEMENT OVER PATCHES	TON	1,456	1,456						
					Array instruments					

DESIGNED -REVISED -USER HAME = liptockg ADDECY55-whi-\$0001.dgn PLDI SCALE = 100.00000 1/ in. In 1801) It-IL 2) Resurfacing \CADO Si REVISED -CHECKED -REVISED -PLOT DATE + 8/25/2014 DATE -REVISED -SHT_ODUBLE PLAN

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

SUMMARY OF QUANTITIES - MILWAUKEE AVENUE SCALE: SHEET OF SHEETS STA.

| Rey | SHEET | NO. | SHEET | F.A.P. SECTION RTE. SECTION 374 (211K, 211Y) RS-2

				CONSTRUCTION CODE						
	SUMMARY OF QUANTITIES		1							
			URBAN	0005						
CODE	ITEM	UNIT	TOTAL	ROADWAY	o de la companya de l					
NO.	T I CIVI		QUANTITY	100% STATE						
					And the state of t					
40603153	POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, STONE MATRIX ASPHALT, NOO	TON	18,911	18,911						
42001300	PROTECTIVE COAT	SQ YD	2,870	2,870						
		<u> </u>								
42300200	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 6 INCH	SQ YD	52	52						
42300400	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 8 INCH	SQ YD	156	156						
42400200	PORTLAND CEMENT CONCRETE SIDEWALK, 5 INCH	SQ FT	9514	9514						
42400800	DETECTABLE WARNINGS	SQFT	7/2	7/2						
)						-				
44000159	HOT-MIX ASPHALT SURFACE REMOVAL, 2 1/2"	SQ YD	175,887	175,887						
44000200	DRIVEWAY PAVEMENT REMOVAL	SQ YD	408	408						
44000600	SIDEWALK REMOVAL	SQ FT	9514	9514						
44002220	HOT-MIX ASPHALT REMOVAL OVER PATCHES, 5"	SQ YD	5,200	5,200						
annieriten ferfendelschrift umstraftmastit										
44003510	MEDIAN REMOVAL PARTIAL DEPTH	SQ FT	8932	8932						
44201749	CLASS D PATCHES, TYPE I, 9 INCH	SQ YD	300	300						
										
44201753	CLASS D PATCHES, TYPE II, 9 INCH	SQ YD	1,700	1,700						
44201757	CLASS D PATCHES, TYPE III, 9 INCH	SQ YD	1,450	1,450						
,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,										
:ptaskg	DESIGNED - REVISED -		······································							

Rev.

* SPECIALTY ITEM

FILE NAME : USER NAME : Uptocky DESIGNED - REVISEO ||N-100111-11 21 Resurfacing\CAOO Sheets\DESTSS-sht-SO082.dgn DRAWN - REVISEO ||PLOT SCALE = 100.8000 '/ In CHECKED - REVISEO | SH1.0008LE PLAN PLOT DATE = 8/25/2014 DATE - REVISEO -

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

SCALE:

	DESIGNED - REVISED -					
6710010	0 MOBILIZATION	L SUM	1	1		
6700040	0 ENGINEER'S FIELD OFFICE, TYPE A	CAL MO	5	5		
6690053	0 SOIL DISPOSAL ANALYSIS	EACH	1	1		Vertical designation of the second se
6690045	SPECIAL WASTE PLANS AND REPORTS	L SUM	1	1		
		and the state of t	Part to the state of the state			
6690020	0 NON-SPECIAL WASTE DISPOSAL	CUYD	29	29		
0040010			4 V			
6040610	D FRAMES AND LIDS, TYPE 1, CLOSED LID	EACH	20	20		
6040600	FRAMES AND LIDS, TYPE 1, OPEN LID	EACH	10	10		
6040495	0 FRAMES AND GRATES, TYPE 24	EACH	5	5		
0040494	0 FRAMES AND GRATES, TYPE 23	EACH	5	5		Tentana and tentan
6040404	A EDANIES AND OBATES. Type 22					
6030030	FRAMES AND LIDS TO BE ADJUSTED	EACH	75	75		
6026270	INLETS TO BE RECONSTRUCTED	EACH	2	2		
6025790	MANHOLES TO BE RECONSTRUCTED	EACH	2	2		
		-	the state of the s		**************************************	
6025280	CATCH BASINS TO BE RECONSTRUCTED	EACH	5	5		
		and the second s			And the second s	
4420175	9 CLASS D PATCHES, TYPE IV, 9 INCH	SQ YD	4049	4049		
NO.	, ,	***	QUANTITY	100% STATE		
CODE	ITEM	UNIT	TOTAL	ROADWAY		
	SUMMARY OF QUANTITIES		URBAN	0005	***************************************	
			A ****	C	ONSTRUCTION COL	DE

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUMMARY OF QUANTITIES - MILWAUKEE AVENUE

SCALE: SHEET OF SHEETS STA. TO STA.

			OF OURNITIES			The state of the s	CC	ONSTRUCTION CODE
		SUMMARY	OF QUANTITIES	>		URBAN	0005	
NO.			ITEM		UNIT	TOTAL QUANTITY	ROADWAY 100% STATE	
70102625	TRAFFIC	CONTROL AND PROTECTION	, STANDARD 701606		L SUM	1	1	
70102630	TRAFFIC	CONTROL AND PROTECTION	, STANDARD 701601		LSUM	1	1	
70102632	TRAFFIC (CONTROL AND PROTECTION	, STANDARD 701602		L SUM	1	1	
70102635	TRAFFIC	CONTROL AND PROTECTION	, STANDARD 701701	:	L SUM	1	1	
70102640	TRAFFIC (CONTROL AND PROTECTION	, STANDARD 701801		L SUM	1	1	
70300100	SHORT-T	ERM PAVEMENT MARKING			FOOT	160,834	160,834	
70300210	TEMPORA	ARY PAVEMENT MARKING - LE	TTERS AND SYMBOLS		SQ FT	3,510	3,510	
70300220	TEMPORA	ARY PAVEMENT MARKING - LIN	NE 4"		FOOT	100,000	100,000	
70300240	TEMPORA	ARY PAVEMENT MARKING - LIN	VE 6"		FOOT	7,680	7,680	· · · · · · · · · · · · · · · · · · ·
70300260	TEMPORA	ARY PAVEMENT MARKING - LIN	NE 12"		FOOT	2,240	2,240	
70300280	80 TEMPORARY PAVEMENT MARKING - LINE 24" 00 WORK ZONE PAVEMENT MARKING REMOVAL			FOOT	1,540	1,540		
70301000				SQ FT	61,500	61,500		
78000100	100 THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS			SQ FT	2454	2454		
78000200	0 THERMO	PLASTIC PAVEMENT MARKING	3 - LINE 4".		FOOT	72,900	72,900	
; liptacky		DESIGNED -	REVISED -				1	

USER NAM ORAWN -CHECKED -DATE -REVISED -It/183111-IL 21 Resurfacing/CADD Shee 68755-sht-80084.dgn PLOT SCALE + 180,0008 1/ In. SHT, DOUBLE PLAN REVISED -PLOT DATE . 8/25/2014

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUMMARY OF QUANTITIES - MILWAUKEE AVENUE SCALE SHEET OF SHEETS STA.

SECTION 374 (211K, 211Y) RS-2

	SUMMARY OF QUANTITIES		the control of the co		NSTRUCTION CODE
·			URBAN	0005	
CODE NO.	ITEM	UNIT	TOTAL QUANTITY	ROADWAY 100% STATE	
78000400	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	12,100	12,100	
7800050	O THERMOPLASTIC PAVEMENT MARKING -LINE 8"	FOOT	300	300	
78000600	THERMOPLASTIC PAVEMENT MARKING - LINE 12"	FOOT	2434	2434	
78000650	THERMOPLASTIC PAVEMENT MARKING - LINE 24"	FOOT	2,300	2,300	
78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	2,700	2,700	
78300200	RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	EACH	2,430	2,430	
88600600	DETECTOR LOOP REPLACEMENT	FOOT	6,443	6,443	
89502378	REBUILD EXISTING HANDHOLE TO HEAVY-DUTY HANDHOLE	EACH	4	4	
X4400100	PORTLAND CEMENT CONCRETE SURFACE REMOVAL (VARIABLE DEPTH)	SQ YD	3,390	3,390	
X5537800	STORM SEWERS TO BE CLEANED 12"	FOOT	4,000	4,000	
X6030310	FRAMES AND LIDS TO BE ADJUSTED (SPECIAL)	EACH	79	79	
	PREFORMED JOINT FILLER REMOVAL		7,000	7,000	
Z0 004530	HOT MIX ASPHALT DRIVEWAY PAVEMENT, 8"		60	50	
Z00 04538	HOT MIX ASPHALT DRIVEWAY PAVEMENT, 10"	SQ YD-	150	150	
70004500	COMBINATION CONCRETE CURB AND CUTTER REMOVAL AND REPLACEMENT	FOOT	5,231	5,231	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUMMARY OF QUANTITIES - MILWAUKEE AVENUE

SCALE: SHEET OF SHEETS STA. TO STA.


THE PROPERTY OF THE PROPERTY O	SUMMARY OF QUANTITIES			CC	NSTRUCTION CODE
4		~~~	URBAN	0005	
CODE NO.	ITEM	UNIT	TOTAL QUANTITY	ROADWAY 100% STATE	
7.0034105	MATERIAL TRANSFER OEVICE	TON	18,911	18,911	
Z0018500	DRAINAGE STRUCTURES TO BE CLEANED	EACH	218	218	
Z0004562	COMBINATION CONCRETE CURB AND GUTTER REMOVAL AND	FOOT	5250	5250	
Z0030850	TEMPORARY INFORMATION SIGNING REPLACEMENT	SQ FT	812	812	

* SPECIALTY ITEM													Rei	V,	
FILE NAME :	USER MANE : liptocky	DESIGNED -	REVISED -		I				***************************************	·····	F.A.P.	SECTION	COUNTY	TOTAL	SHEET
h/1831]]-1L 2] Resurfabing/CADD Sheets/0]	68755-sht-\$0086.dgn	ORAWN -	REVISED -	STATE OF ILLINOIS	 	SUMMARY OF QUANTITIES - MILWAUKEE AVENUE					374	(211K, 211Y) 85-2	COOK	62	. 8
	PLOT SCALE = 180,0860 '/ in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION									CONTRAC	CT NO. 6	OY55
SHT.DOUBLE PLAN	PLOT DATE + 8/25/2014	DATE -	REVISED -		SCALE	SHEET	ΰF	SHEETS	STA,	TO STA.		ILLINOIS FED.	AID PROJECT		

HOT-MIX ASPHALT MIXTURE REQUIREMENTS									
MIXTURE TYPE AIR VOIDS © Ndes									
PAVEMENT RESURFACING									
POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, STONE MATRIX ASPHALT, N80 (IL 9.5 mm); 1¾"	3.5% @ 80 GYR.	PFP							
POLMERIZED LEVELING BINDER, (MACHINE METHOD), IL 4.75, N50, 3/4"	3.5% @ 50 GYR.	QCP							
PATCHING									
CLASS D PATCHES (HMA BINDER IL-19 mm); 9"	4% @ 70 GYR.	QCP							
HMA REPLACEMENT OVER PATCHES (HMA BINDER IL-19 mm)	4% @ 70 GYR.	QCP							
ENTRANCES									
HMA SURFACE COURSE, MIX "C", N50 (IL 9.5 mm); 2"	4% @ 50 GYR.	QC/QA							
HMA BASE COURSE (HMA BINDER IL-19 mm); 6" & 8"	4% @ 50 GYR.	QC/QA							
OMP DESIGNATION: QUALITY CONTROL FOR PERFORMANCE (QCP); PAY FOR PERFORMANCE (PFP); QUALITY	ITY CONTROL/QUALITY	ASSURANCE (QC/Q							


NOTES:

- 1. THE UNIT WEIGHT USED TO CALCULATE ALL HOT-MIX ASPHALT SURFACE MIXTURE QUANTITIES IS 112 LBS/SQ YD/IN.
- 2. THE "AC TYPE" FOR POLYMERIZED HMA MIXES SHALL BE "SBS/SBR PG 76-22" AND FOR NON-POLYMERIZED HMA THE "AC TYPE" SHALL BE "PG 64-22" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS. FOR "USE OF RECYCLED MATERIALS" SEE DISTRICT ONE SPECIAL PROVISIONS.
- 3. CONTRACTOR SHALL PATCH BEFORE MILLING.
- 4. QUALITY MANAGEMENT PROGRAM (QMP) IDENTIFIES THE PARTICULAR QUALITY CONTROL SPECIFICATION THAT APPLIES TO THE HMA MIXTURE.

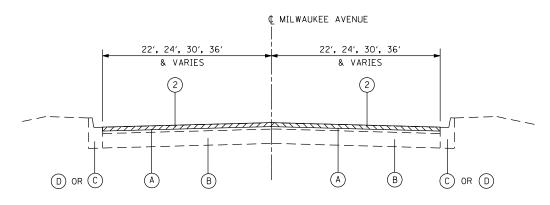

EXISTING TYPICAL SECTION

STA. 37+61 TO STA. 48+30 STA. 137+70 TO STA. 146+50 STA. 50+30 TO STA. 54+20 STA. 153+70 TO STA. 184+20 STA. 63+00 TO STA. 111+00 STA. 226+74 TO STA. 291+64

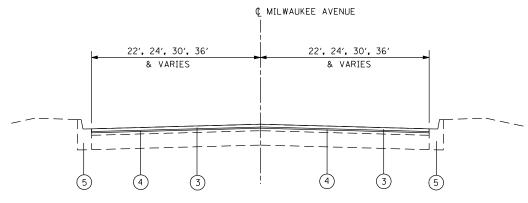

PROPOSED TYPICAL SECTION


STA. 37+61 TO STA. 48+30 STA. 137+70 TO STA. 146+50 STA. 50+30 TO STA. 54+20 STA. 63+00 TO STA. 111+00 STA. 226+74 TO STA. 291+64

EXISTING CONDITIONS:


- (A) HOT-MIX ASPHALT SURFACE AND BINDER COURSE, 4" & VARIES
- B EXISTING P.C.C. PAVEMENT, 9" & VARIES
- C) COMBINATION CONCRETE CURB AND GUTTER TYPE B-6.12
- D COMBINATION CONCRETE CURB AND GUTTER TYPE B-6.24
- (E) SUB-BASE GRANULAR MATERIAL
- (F) AGGREGATE BASE COURSE, 9"±

PROPOSED IMPROVEMENTS:

- 1) P.C.C. SURFACE REMOVAL (VARIABLE DEPTH), 0" TO 11/2" MAX.
- 2 HOT-MIX ASPHALT SURFACE REMOVAL, 21/2"
- 3) POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, SMA, N80, 13/4"
- 4) POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.75, N50, 3/4"
- 5) COMB. CONC. CURB AND GUTTER REMOVAL AND REPLACEMENT (AS DETERMINED BY THE ENGINEER)

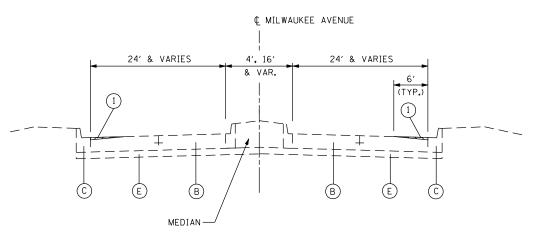



EXISTING TYPICAL SECTION STA. 22+40 TO STA. 37+61

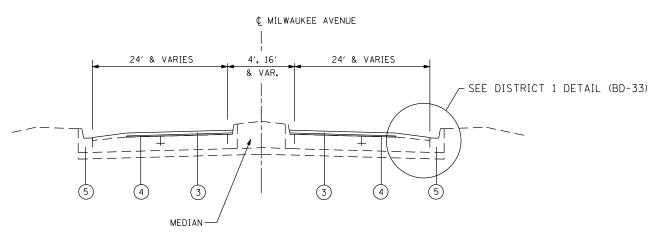



PROPOSED TYPICAL SECTION STA. 22+40 TO STA. 37+61


FILE NAME =	USER NAME = IDOT	DESIGNED - G.L.	REVISED -				TVDI	CAL SECT	IONG		F.A.P.	SECTION	COUNTY	TOTAL SHEET SHEETS NO.
1:\103111-11 21 resurfacing\cadd sheets\	0160Y55_sht_typ01.dgn	DRAWN - B.K.	REVISED -	STATE OF ILLINOIS				AUKEE A			374	(211K, 211Y) RS-2	СООК	62 9
	PLOT SCALE = 20.0000 '/ IN.	CHECKED - M.P.	REVISED -	DEPARTMENT OF TRANSPORTATION			IVIILAY	AURLE A	VENUE				CONTRAC	CT NO. 60Y55
SHT_DOUBLE PLAN	PLOT DATE = 9/11/2014	DATE - SEPTEMBER 2014	REVISED -		SCALE:	SHEET	1 OF 2	2 SHEETS	STA.	TO STA.		ILLINOIS FED. A	ID PROJECT	

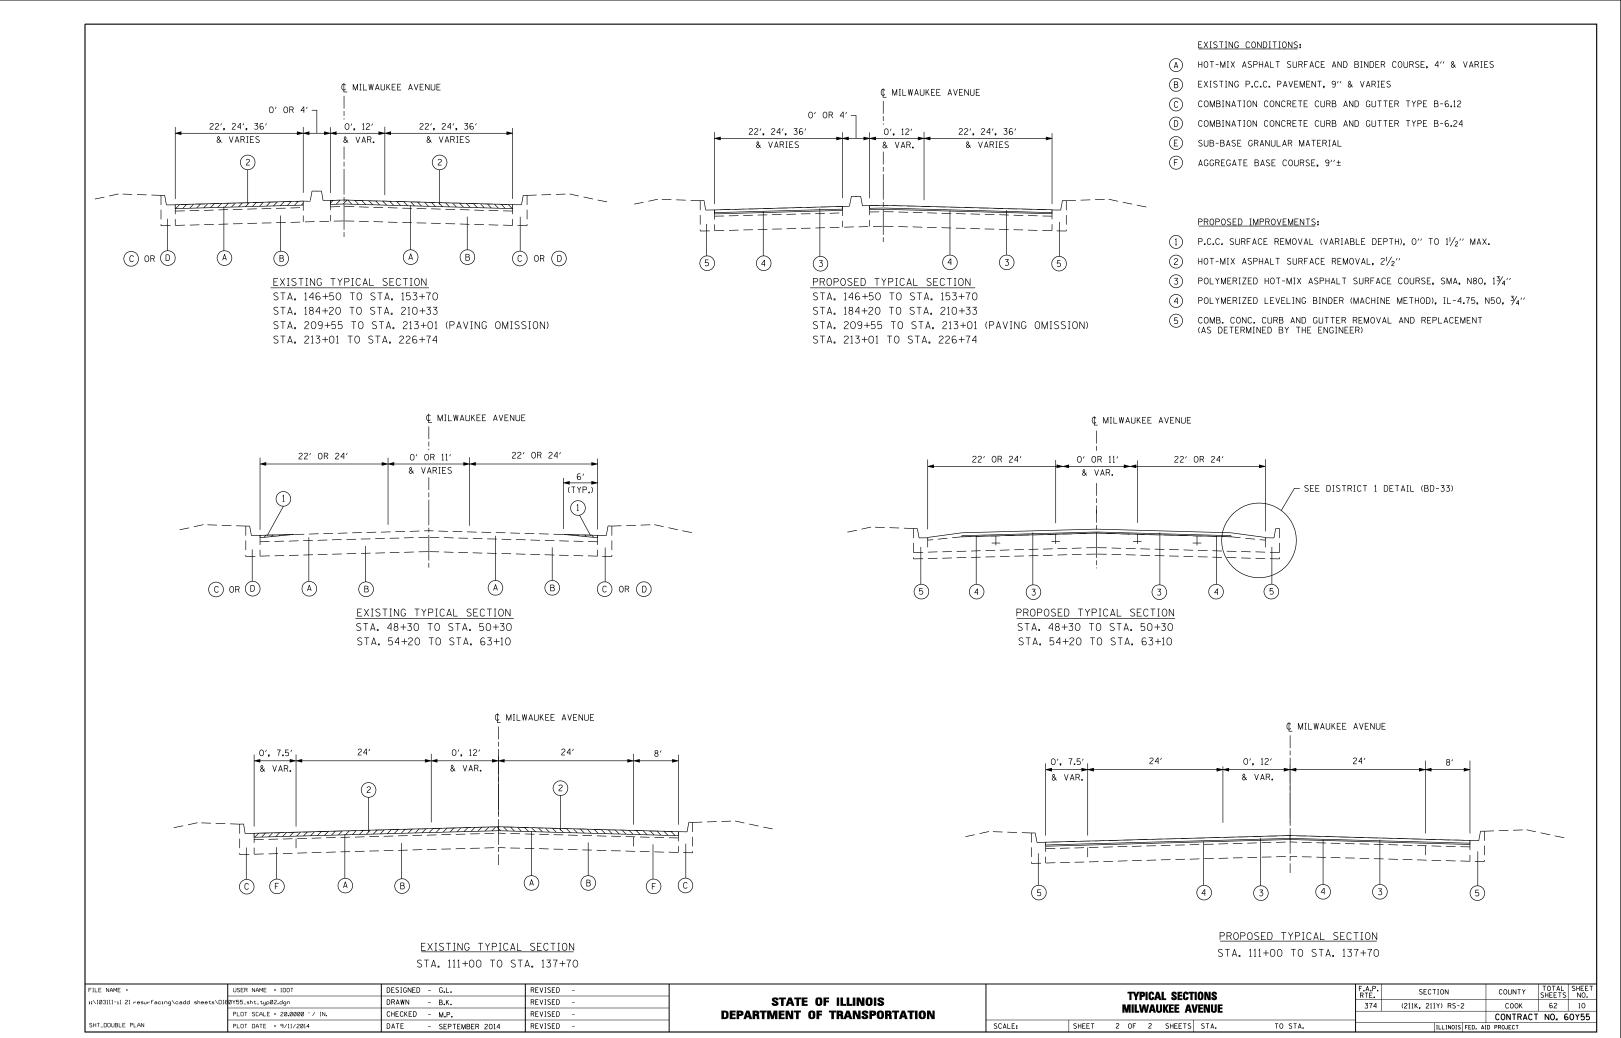


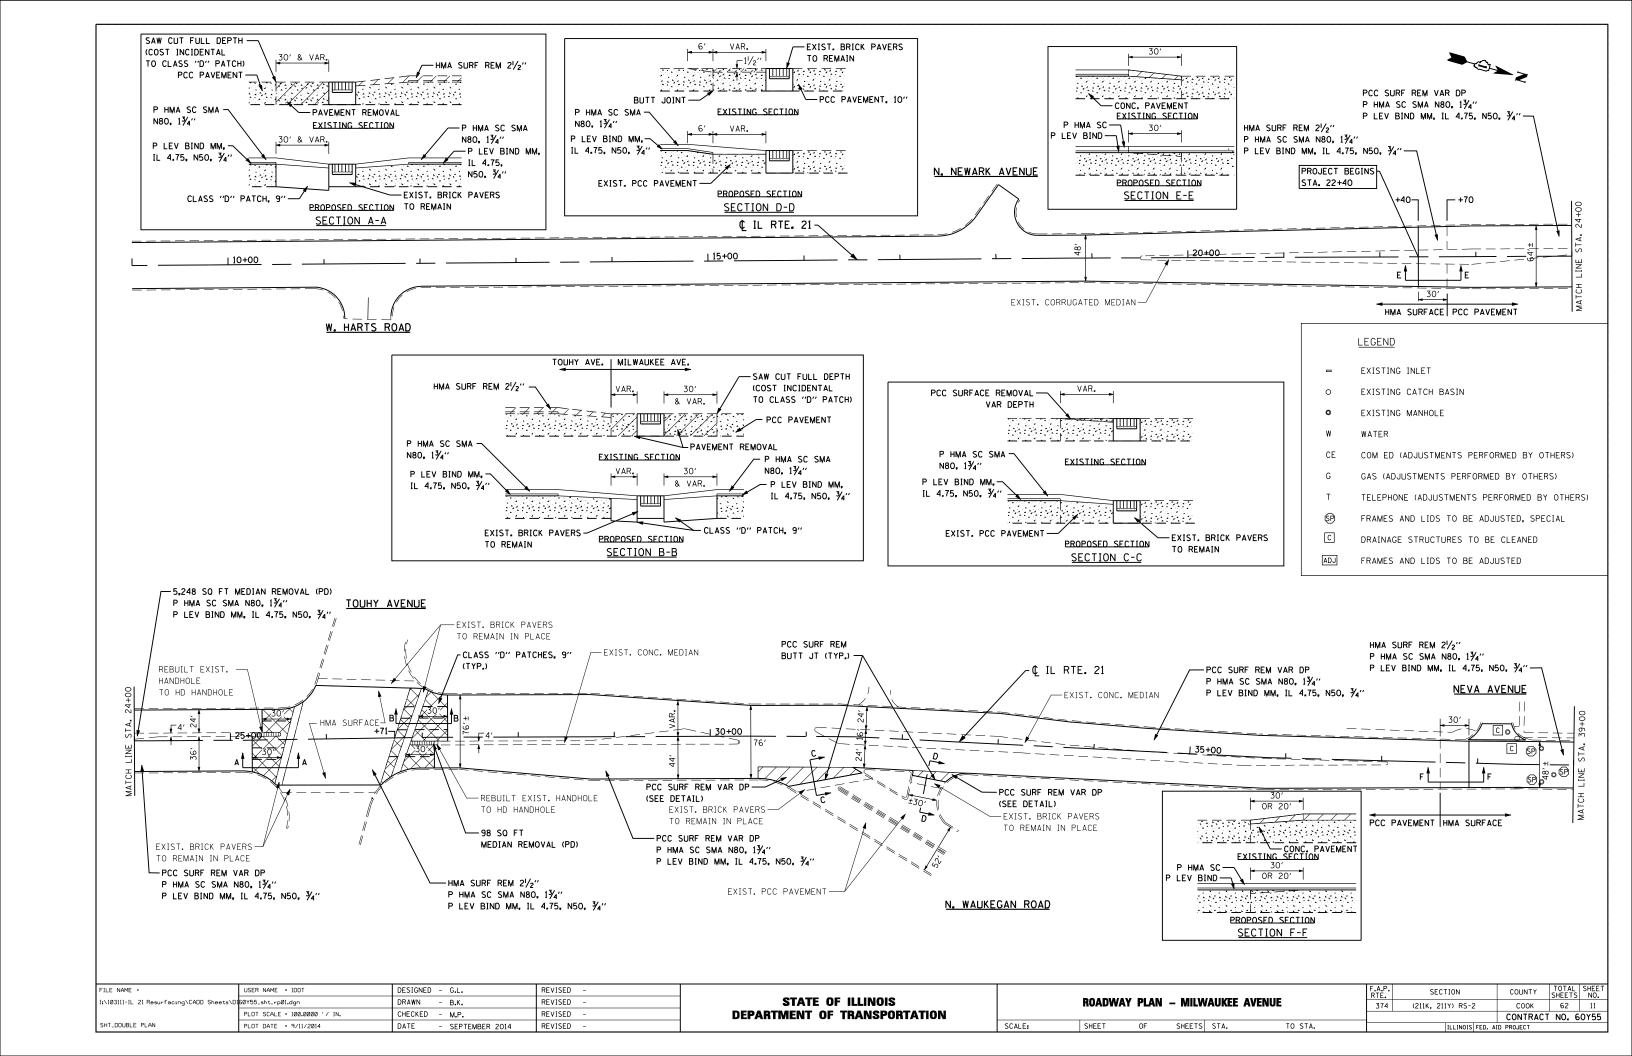

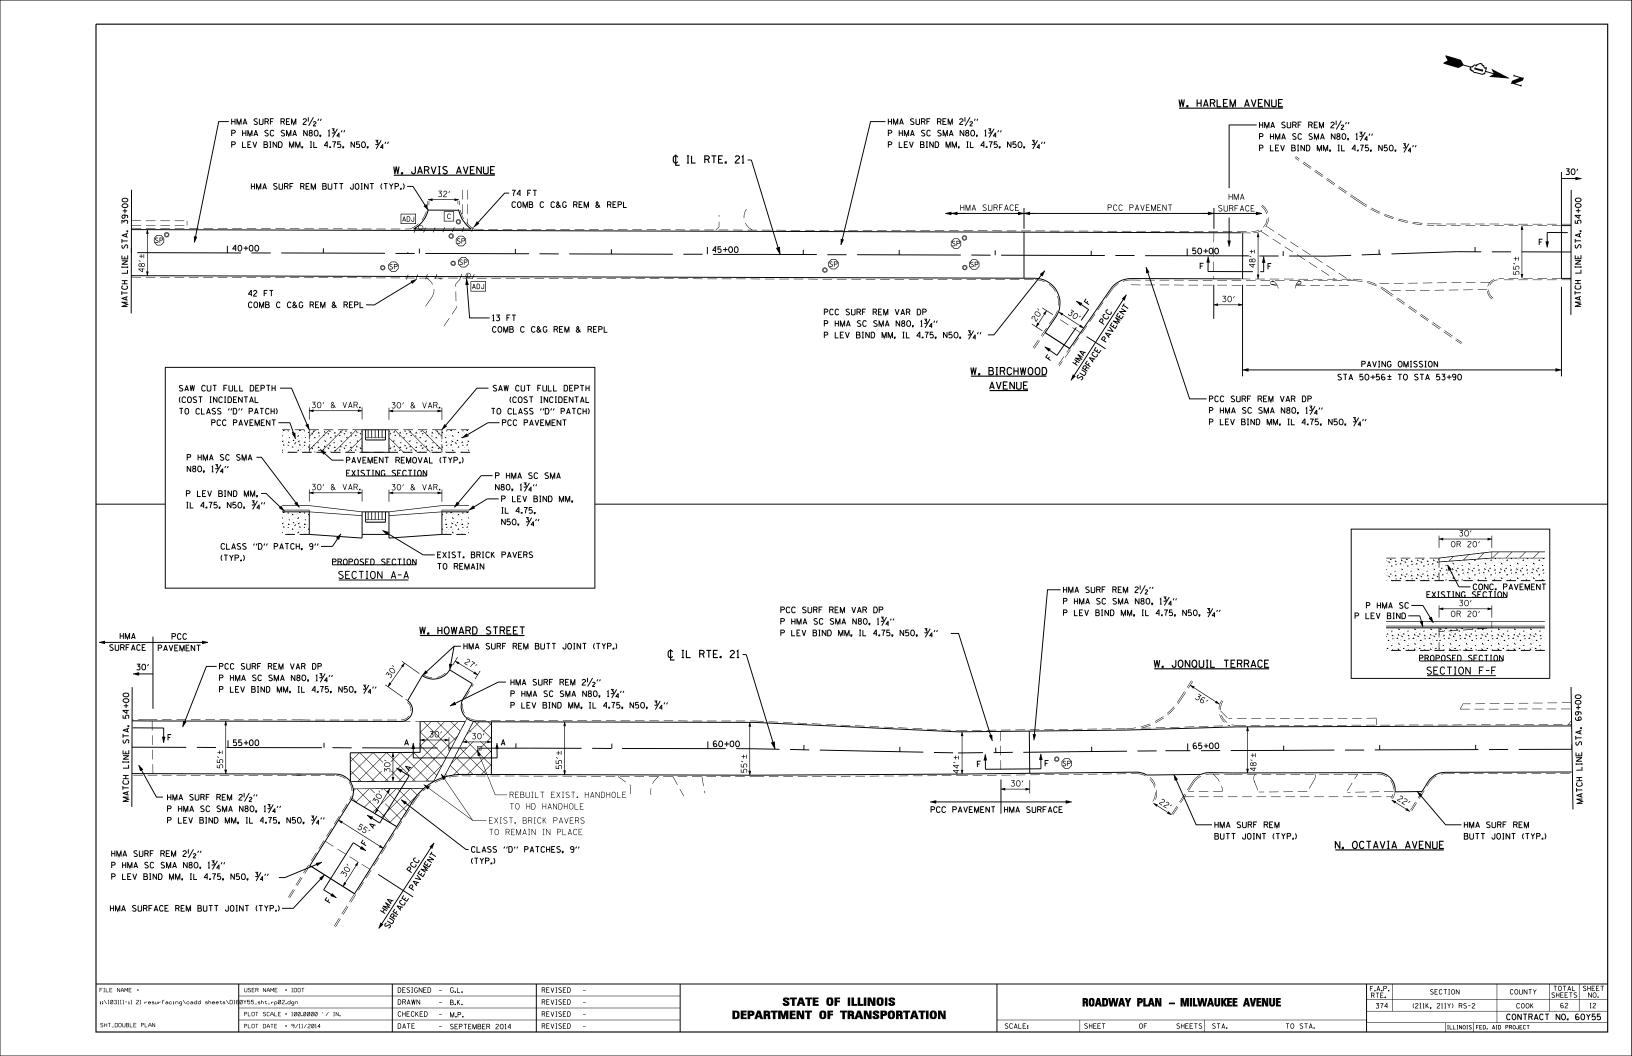


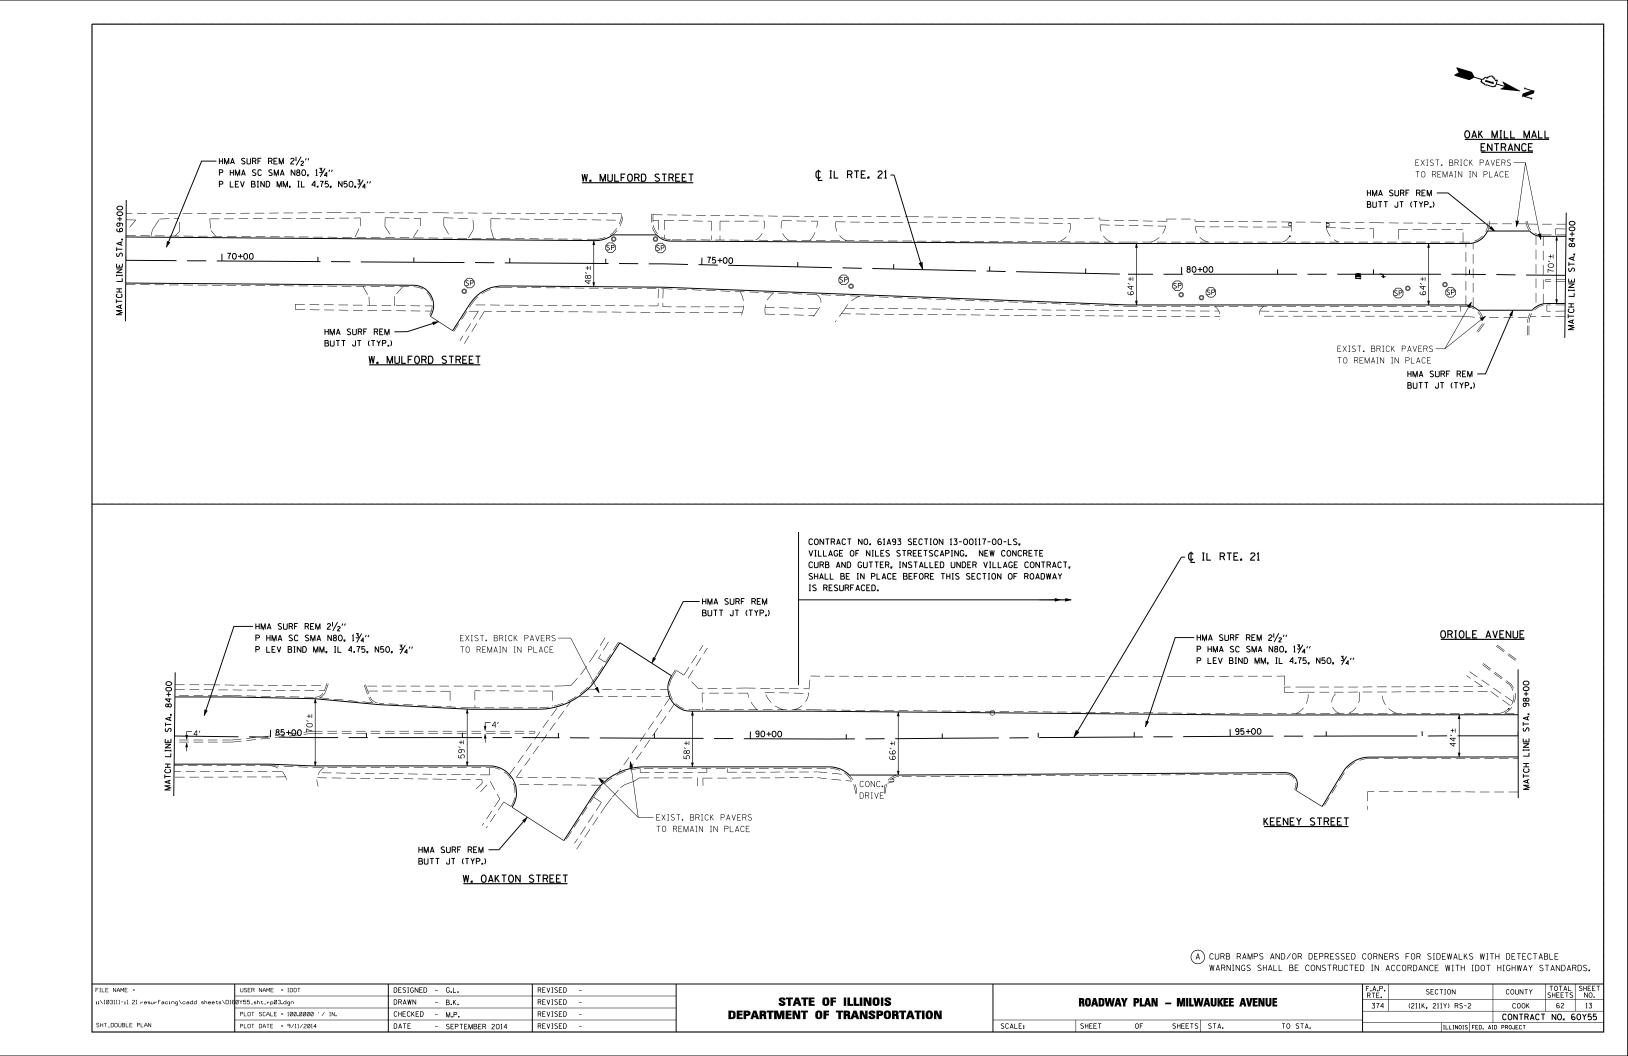

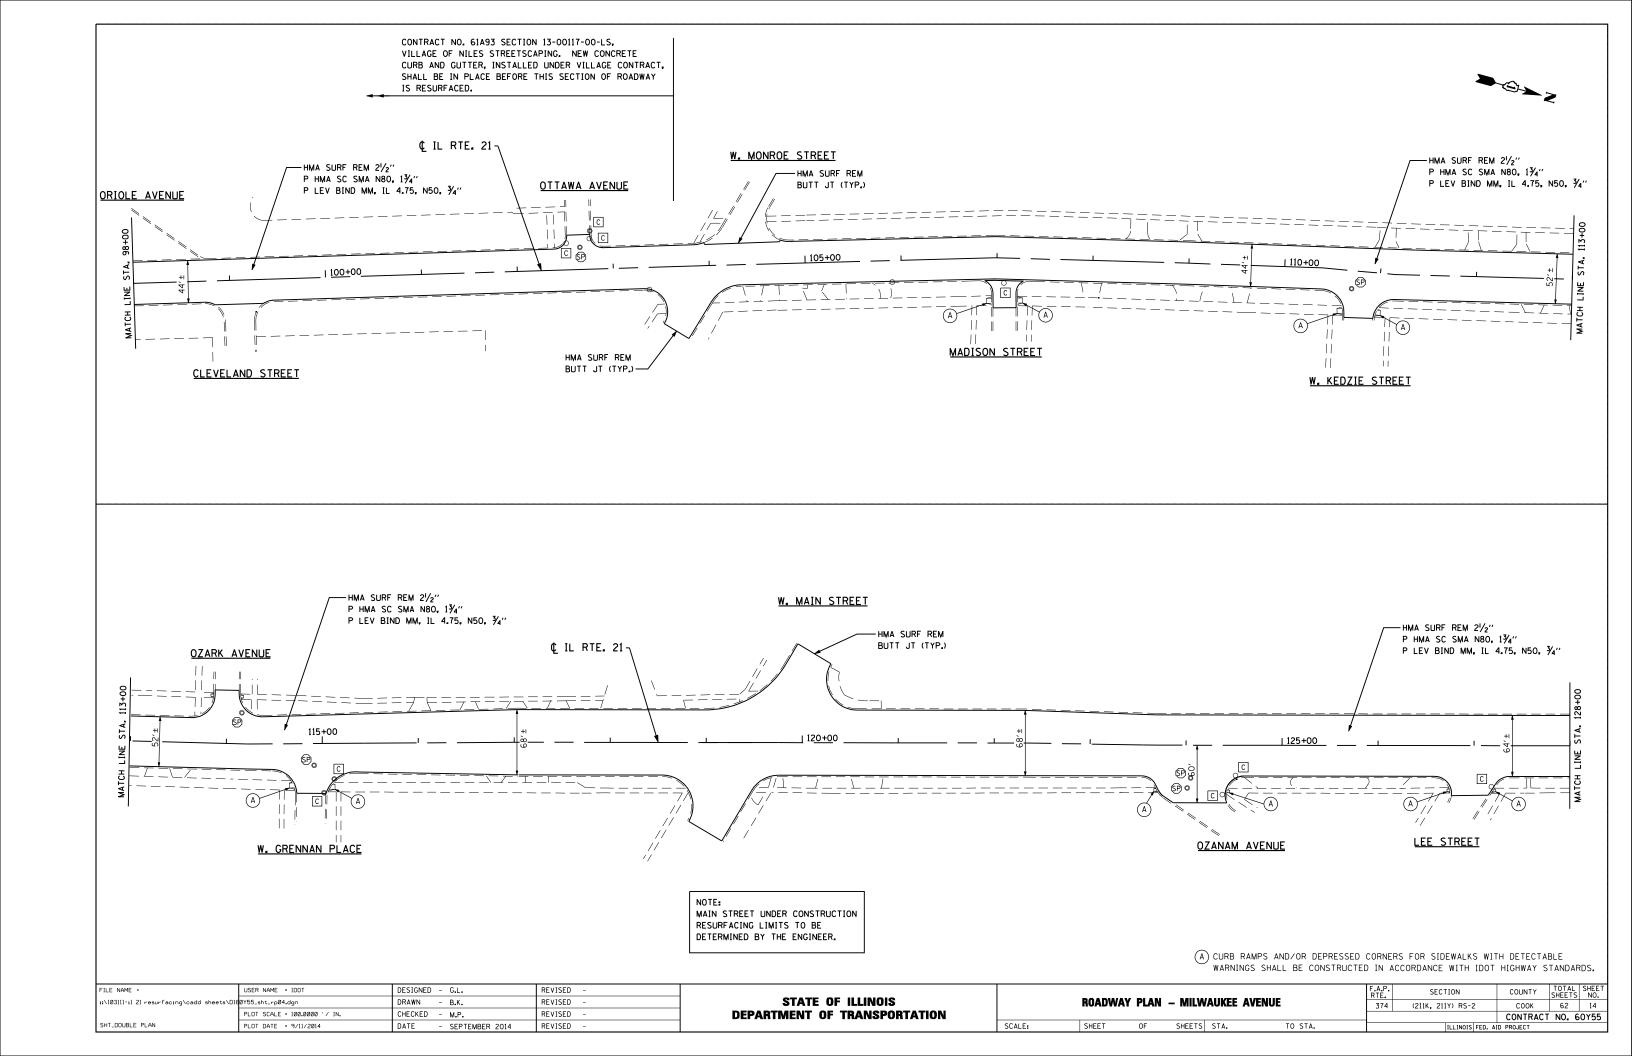

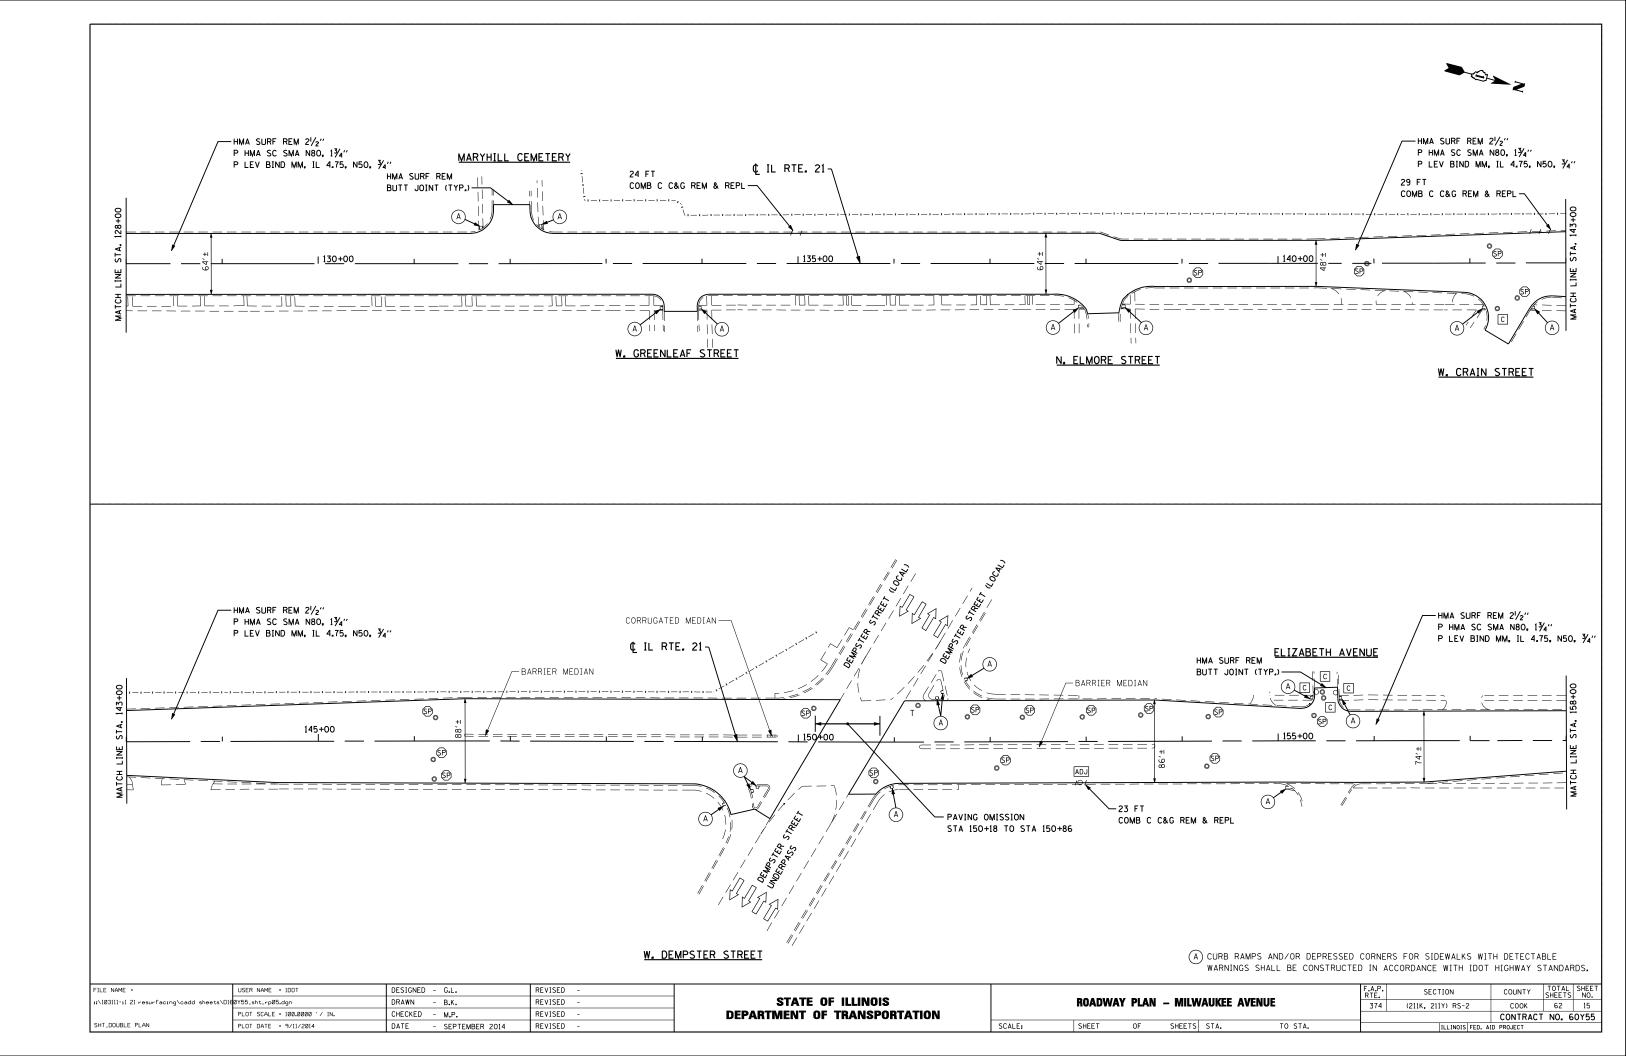



HMA SURF REM 21/2" P HMA SC SMA NBO, 13/4" P LEV BIND MM, IL 4.75, N50, 3/4" OAK AVENUE A 1160+00	¢ IL RT	FE. 21 A A A A A A A A A A A A A	HMA SURF REM BUTT JOINT (TYP.) 1 170+00 67 FT COMB C C&G REM & REPL 24 FT COMB C C&G REM & REPL	HMA SURF REM 21/2" P HMA SC SMA N80, 13/4" P LEV BIND MM, IL 4.75, N50, 3/4" OPEL VI
HMA SURF REM 2½" P HMA SC SMA NBO, 1¾" P LEV BIND MM, IL 4.75, N50, ¾" HMA SURF REM BUTT JOINT (TYP.) N. COURTLAND AVENUE	¢ IL RTE. 21-	I 180+00 68 FT COMB C C&G REM & RI	N. MARYLAND STREET (A) CURB RAMPS AND/OR DEPRESS	ED CORNERS FOR SIDEWALKS WITH DETECTABLE CTED IN ACCORDANCE WITH IDOT HIGHWAY STANDARDS.
FILE NAME = USER NAME = IDOT DESIGNED - G.L.		STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	ROADWAY PLAN - MILWAUKEE AVENUE SCALE: SHEET OF SHEETS STA. TO STA.	F.A.P. SECTION COUNTY TOTAL SHEET NO.

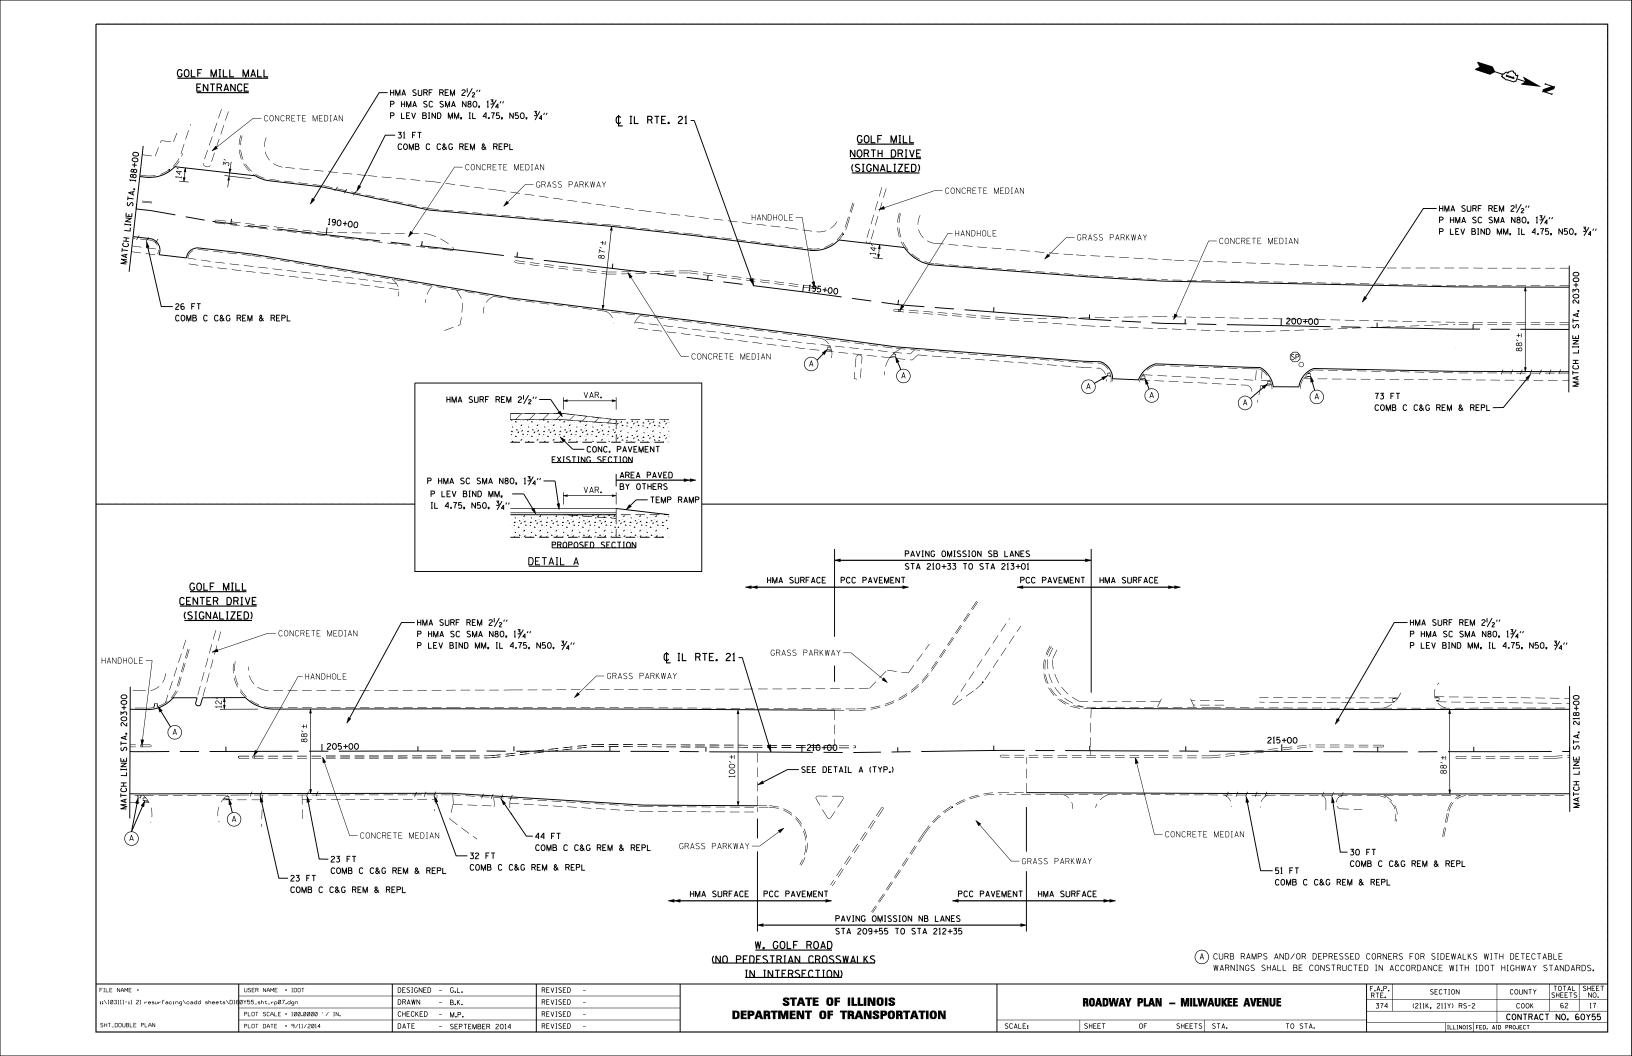

HMA SURF REM 2½" P HMA SC SMA N80, 1¾" P LEV BIND MM, IL 4.75, N50, ¾" HMA SURF REM BUTT JT (TYP.) CONCRETE MEDIAN	\$\times_{\text{LIRTE. 21}} \tag{297 FT COMB C C&G REM & REPL CORRUGATED MEDIAN}\$	COMB C C&G REM & REPL 92 FT COMB C C&G REM & REPL	HMA SURF REM 2½" P HMA SC SMA N80, 1¾" P LEV BIND MM, IL 4.75, N50, ¾"
CCORRUGATED MEDIAN CCORRUGATED MEDIAN GRASS PARKWAY F I FV BIND MM. II. 4.75, N50, 3/" P I FV BIND MM. II. 4.75, N50, 3/" HMM.	S PARKWAY 60 FT COMB C C&G REM & REPL P HMA SC SMA N80, 1¾" P LEV BIND MM, IL 4.75, N50 TT JT (TYP.)	1	48'±
(NO PEI	GREENWOOD AVENUE DESTRIAN CROSSWALKS THE INTERSECTION)		
HMA SURF REM 2½2" P HMA SC SMA N80, 1¾4" P LEV BIND MM, IL 4.75, N50, ¾4" C IL RTE. 21 30 FT COMB C C&G REM & REPL	EDGE OF PAVEMENT		HMA SURF REM 2½" P HMA SC SMA N80, 1¾" P LEV BIND MM, IL 4.75, N50, ¾"


270+00 90 90	EL CENTRAL ROAD FINAL SUPP PER 27/- P NAM SUPP PE	HMA SURF REM 2½" P HMA SC SMA NBO, 1¾" P LEV BIND MM, IL 4.75, N50	CEMETER!	LIL RTE. 21————————————————————————————————————	255+00		260+00ADJ	HMA SURF REM 21/2" P HMA SC SMA NBO, 13/4" P LEV BIND MM, IL 4.75, N50
P HAM S C SMA NO. 1½." P HAM S C SMA NO. 1½." P LEV BIND MM. IL 4.75, NO. ½." Q IL RTE. 21 BUT JT (TYP.) 275+00 275+00 30 30 30 30 30 31 COMB C CAG REM & REPL COMB C CAG REM & REPL TRIUMVERA STREET P LEV BIND MM. IL 4.75, P LEV BIND MM. IL 4.75, TRIUMVERA STREET P LEV BIND MM. IL 4.75, P LEV BIND MM. IL 4.75, TRIUMVERA STREET P LEV BIND MM. IL 4.75, TRIUMVERA STREET P LEV BIND MM. IL 4.75, TRIUMVERA STREET P LEV BIND MM. IL 4.75, TOMB C CAG REM & REPL TOMB C CAG REM & REPL TOMB C CAG REM & REPL	TRIUMVERA STREET P LEV BIND MA. IL 4.75 P ILEV BIND MA. IL 4.75 FINAL SUS MAN BIO. 1½. P ILEV BIND MA. IL 4.75 BUILT JT (TIP) BUILT JT (TIP) BUILT JT (TIP) JT					COMB C C&G RE		
105 FT COMB C C&G REM & REPL 105 COMB C C&G REM & REPL	TOMB C CAG REM & REPL LINNEMAN STREET LINNEMAN STREET							/ P HMA SC SMA N80, 1¾′
	(A) CURB RAMPS AND/OR DEPRESSED CORNERS FOR SIDEWALKS WITH DETECTABLE WARNINGS SHALL BE CONSTRUCTED IN ACCORDANCE WITH IDOT HIGHWAY STA	265+00		¢ IL RTE. 21			RF REM T (TYP.)	/ P HMA SC SMA N80, 1¾′

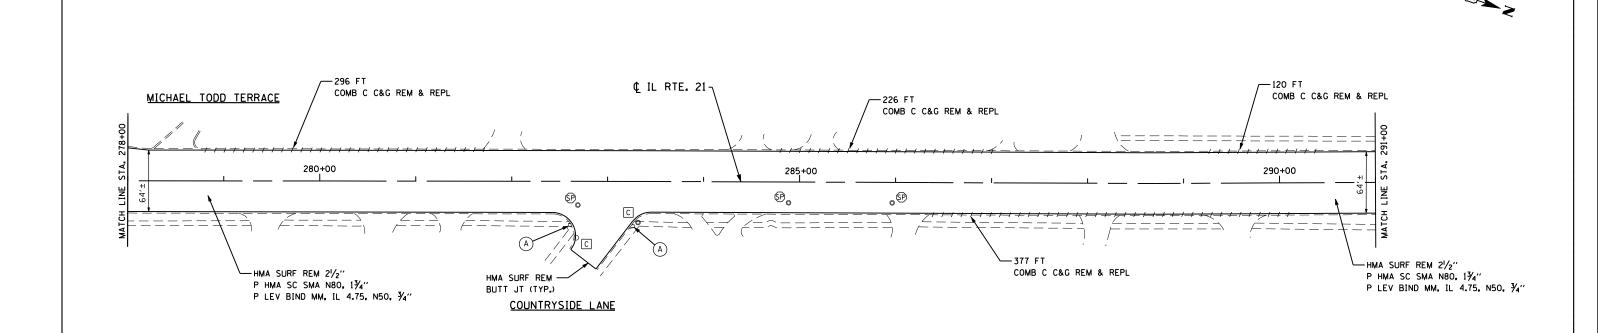


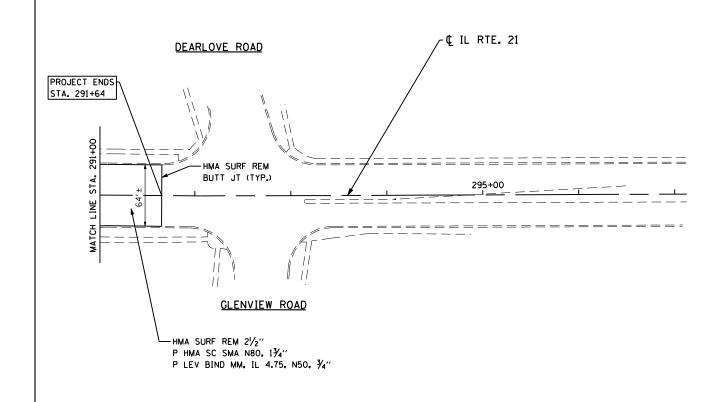

(A) CURB RAMPS AND/OR DEPRESSED CORNERS FOR SIDEWALKS WITH DETECTABLE WARNINGS SHALL BE CONSTRUCTED IN ACCORDANCE WITH IDOT HIGHWAY STANDARDS.

FILE NAME =	USER NAME = IDOT	DESIGNED - G.L.	REVISED -								RTE.	SECTION	COUNTY	SHEETS	NO.
1:\103111-11 21 resurfacing\c	.cadd sheets\D160Y55_sht_rp10.dgn	DRAWN - B.K.	REVISED -	STATE OF ILLINOIS		ROADWA	AY PLAN	- MILW	aukee av	ENUE	374	(211K, 211Y) RS-2	соок	62	20
	PLOT SCALE = 100.0000 '/ IN.	CHECKED - M.P.	REVISED -	DEPARTMENT OF TRANSPORTATION								,,	CONTRACT	T NO. 60	Y55
SHT_DOUBLE PLAN	PLOT DATE = 9/11/2014	DATE - SEPTEMBER 2014	REVISED -		SCALE:	SHEET	OF	SHEETS	STA.	TO STA.		ILLINOIS FED. A	ID PROJECT		

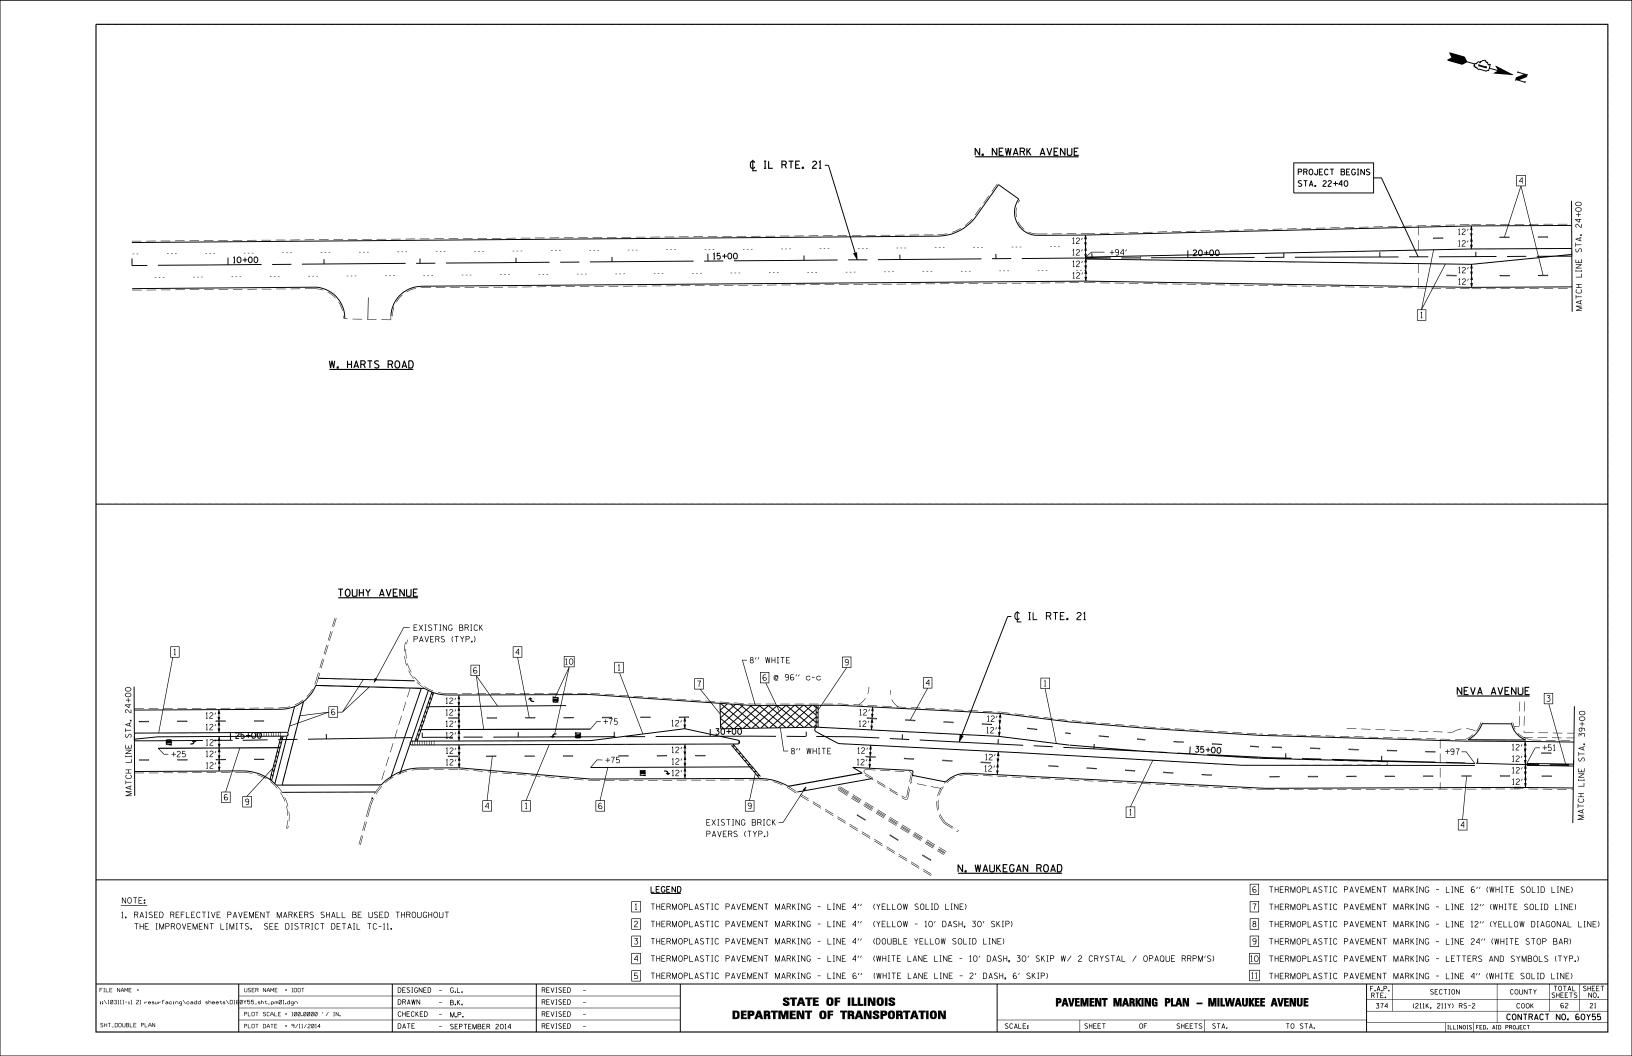

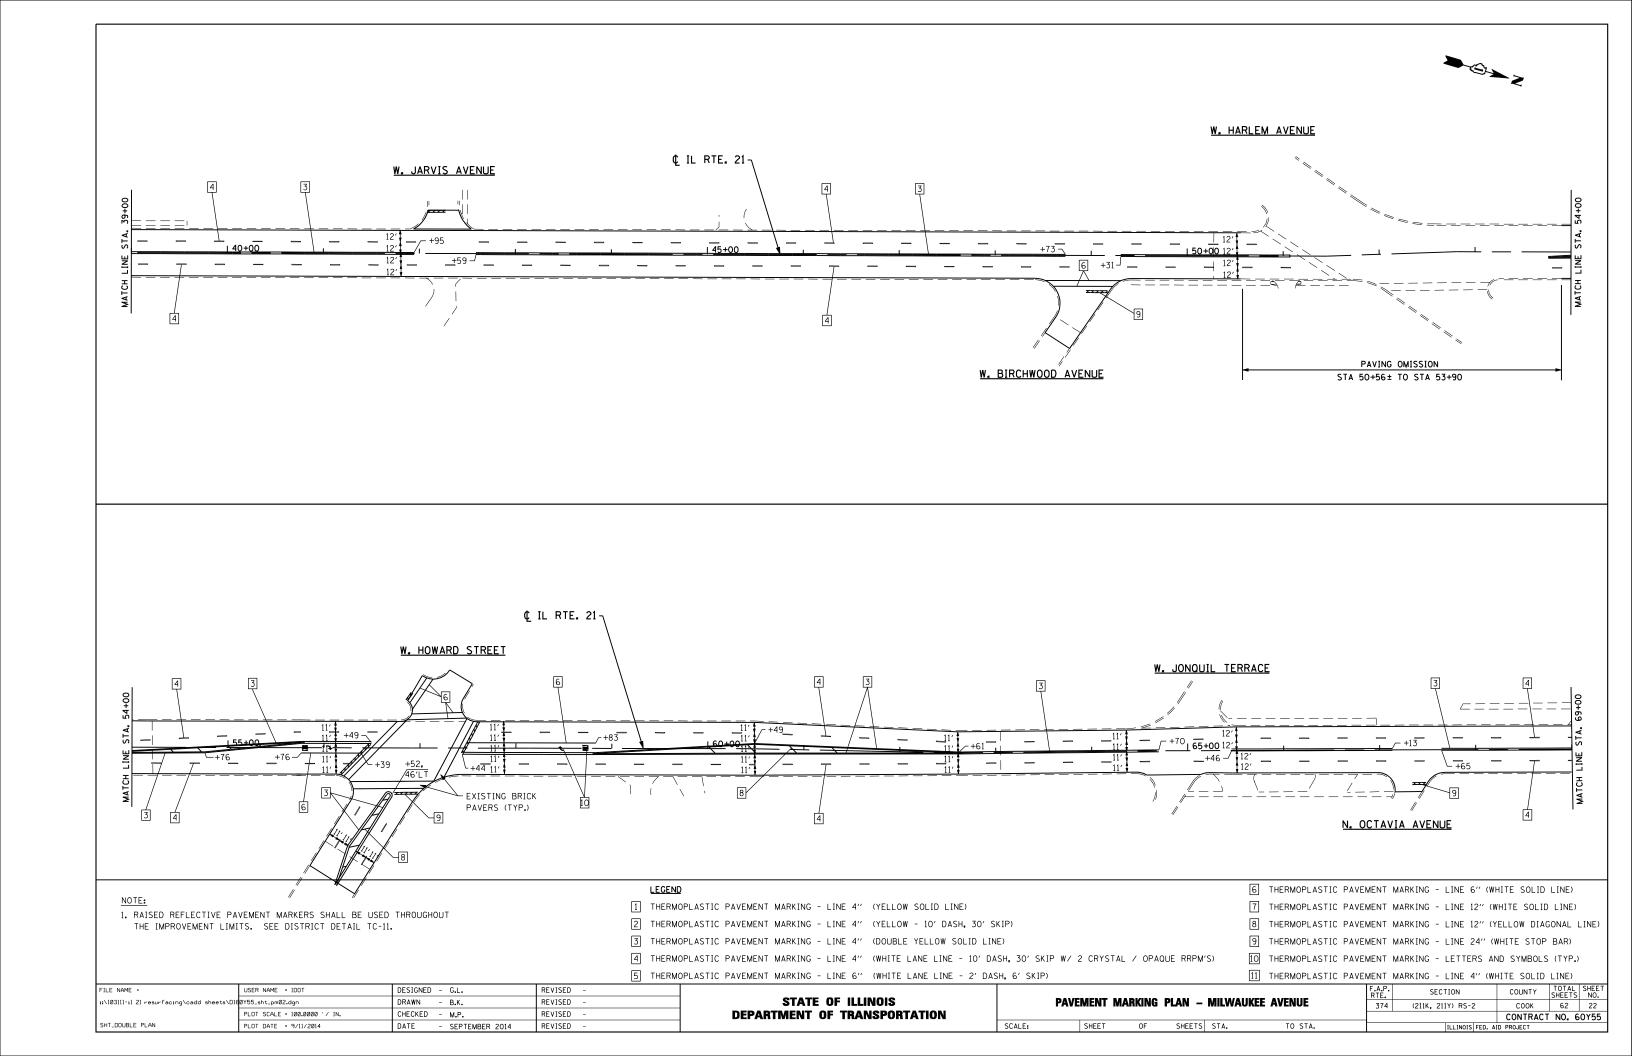





6 THERMOPLASTIC PAVEMENT MARKING - LINE 6" (WHITE SOLID LINE)

7 THERMOPLASTIC PAVEMENT MARKING - LINE 12" (WHITE SOLID LINE)

8 THERMOPLASTIC PAVEMENT MARKING - LINE 12" (YELLOW DIAGONAL LINE)

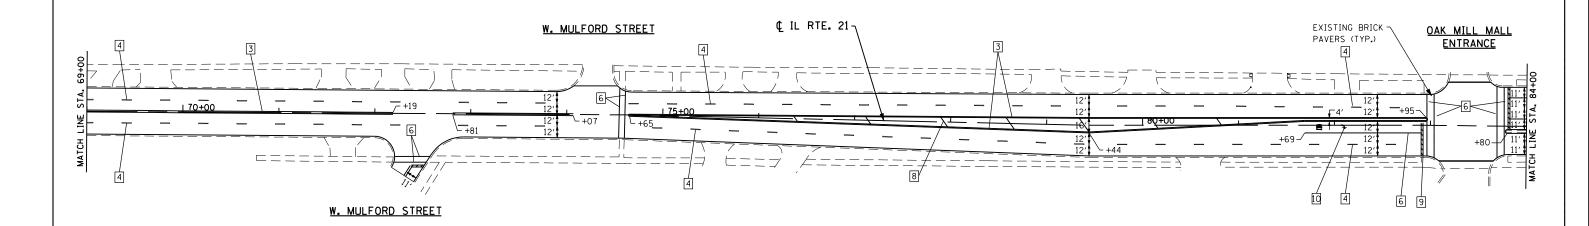

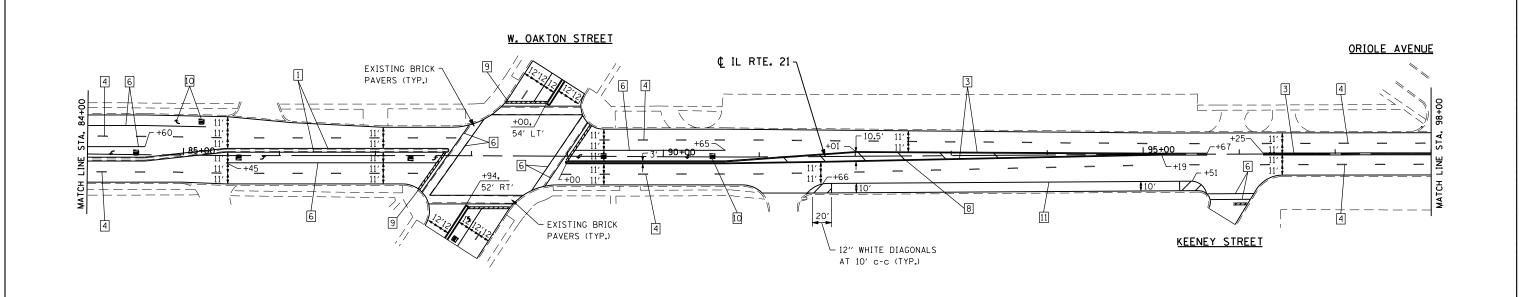


3 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (DOUBLE YELLOW SOLID LINE) 9 THERMOPLASTIC PAVEMENT MARKING - LINE 24" (WHITE STOP BAR) 4 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (WHITE LANE LINE - 10' DASH, 30' SKIP W/ 2 CRYSTAL / OPAQUE RRPM'S) 10 THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS (TYP.) 5 THERMOPLASTIC PAVEMENT MARKING - LINE 6" (WHITE LANE LINE - 2" DASH, 6" SKIP) 11 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (WHITE SOLID LINE) COUNTY TOTAL SHEET NO. COOK 62 23 FILE NAME = DESIGNED - G.L. REVISED USER NAME = IDOT STATE OF ILLINOIS ı:\103111-ıl 21 resurfacı 0Y55_sht_pm03.dgn DRAWN - B.K. REVISED PAVEMENT MARKING PLAN - MILWAUKEE AVENUE PLOT SCALE = 100.0000 '/ IN. CHECKED - M.P. REVISED **DEPARTMENT OF TRANSPORTATION** CONTRACT NO. 60Y55 OF SHEETS STA. PLOT DATE = 9/11/2014 DATE - SEPTEMBER 2014 REVISED


1 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (YELLOW SOLID LINE)


2 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (YELLOW - 10' DASH, 30' SKIP)


1. RAISED REFLECTIVE PAVEMENT MARKERS SHALL BE USED THROUGHOUT

THE IMPROVEMENT LIMITS. SEE DISTRICT DETAIL TC-11.

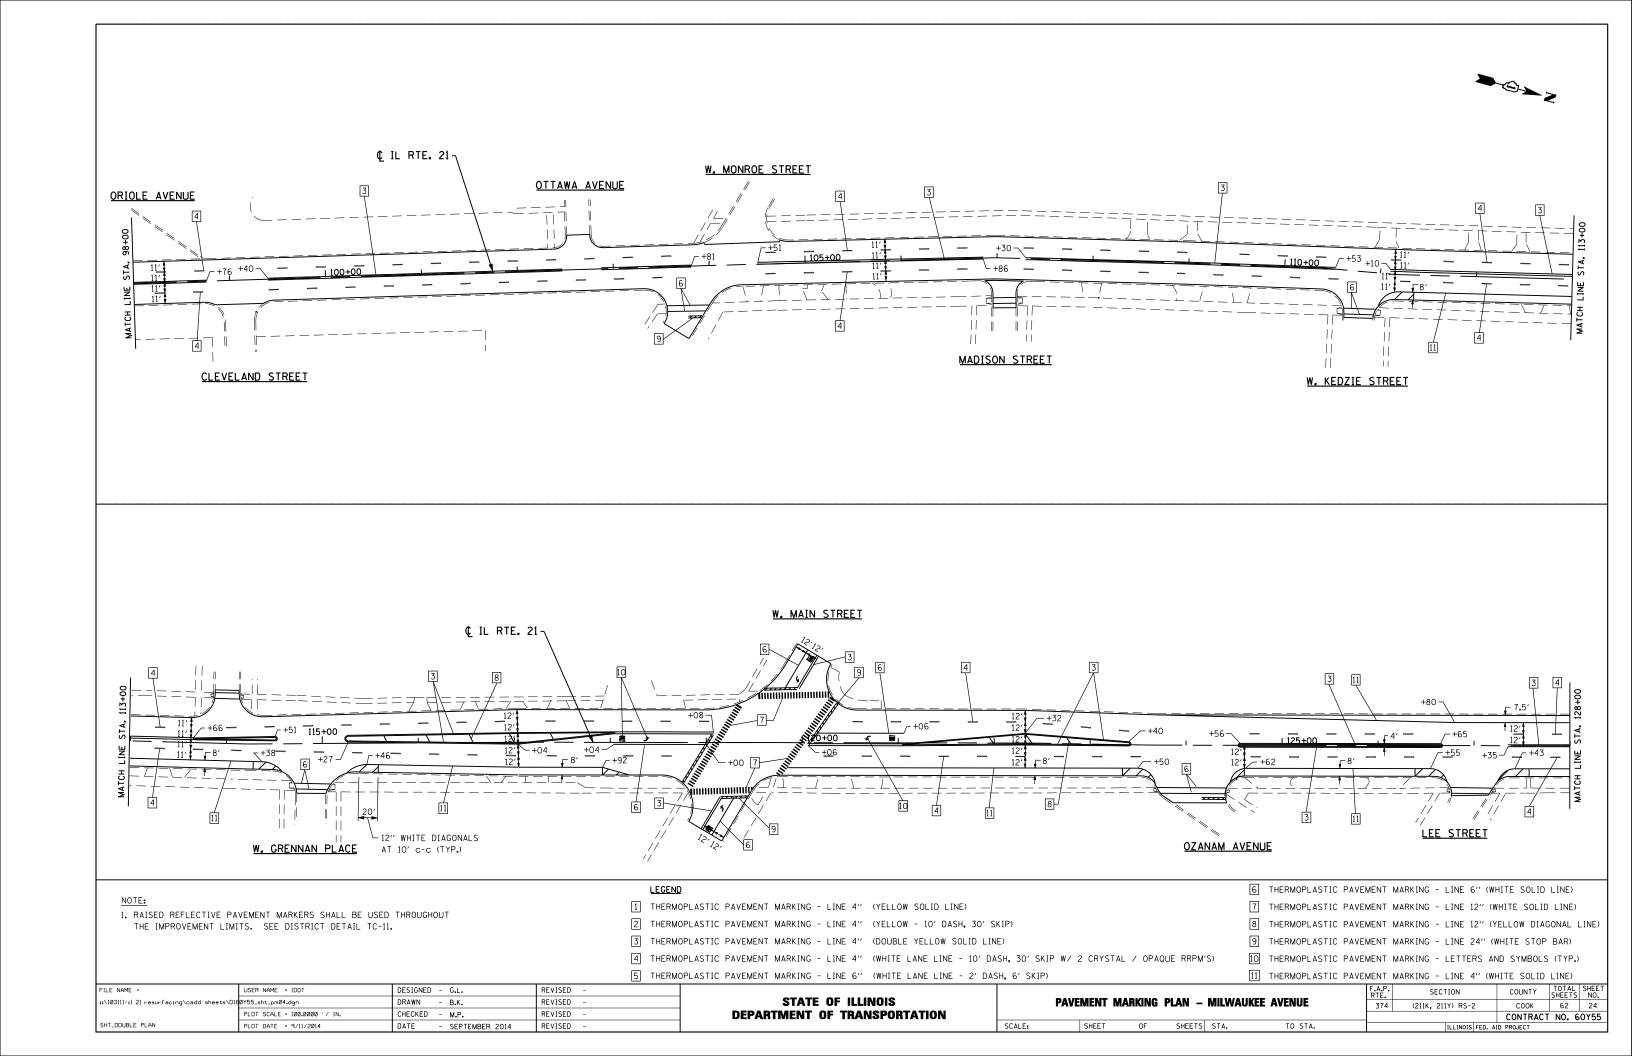

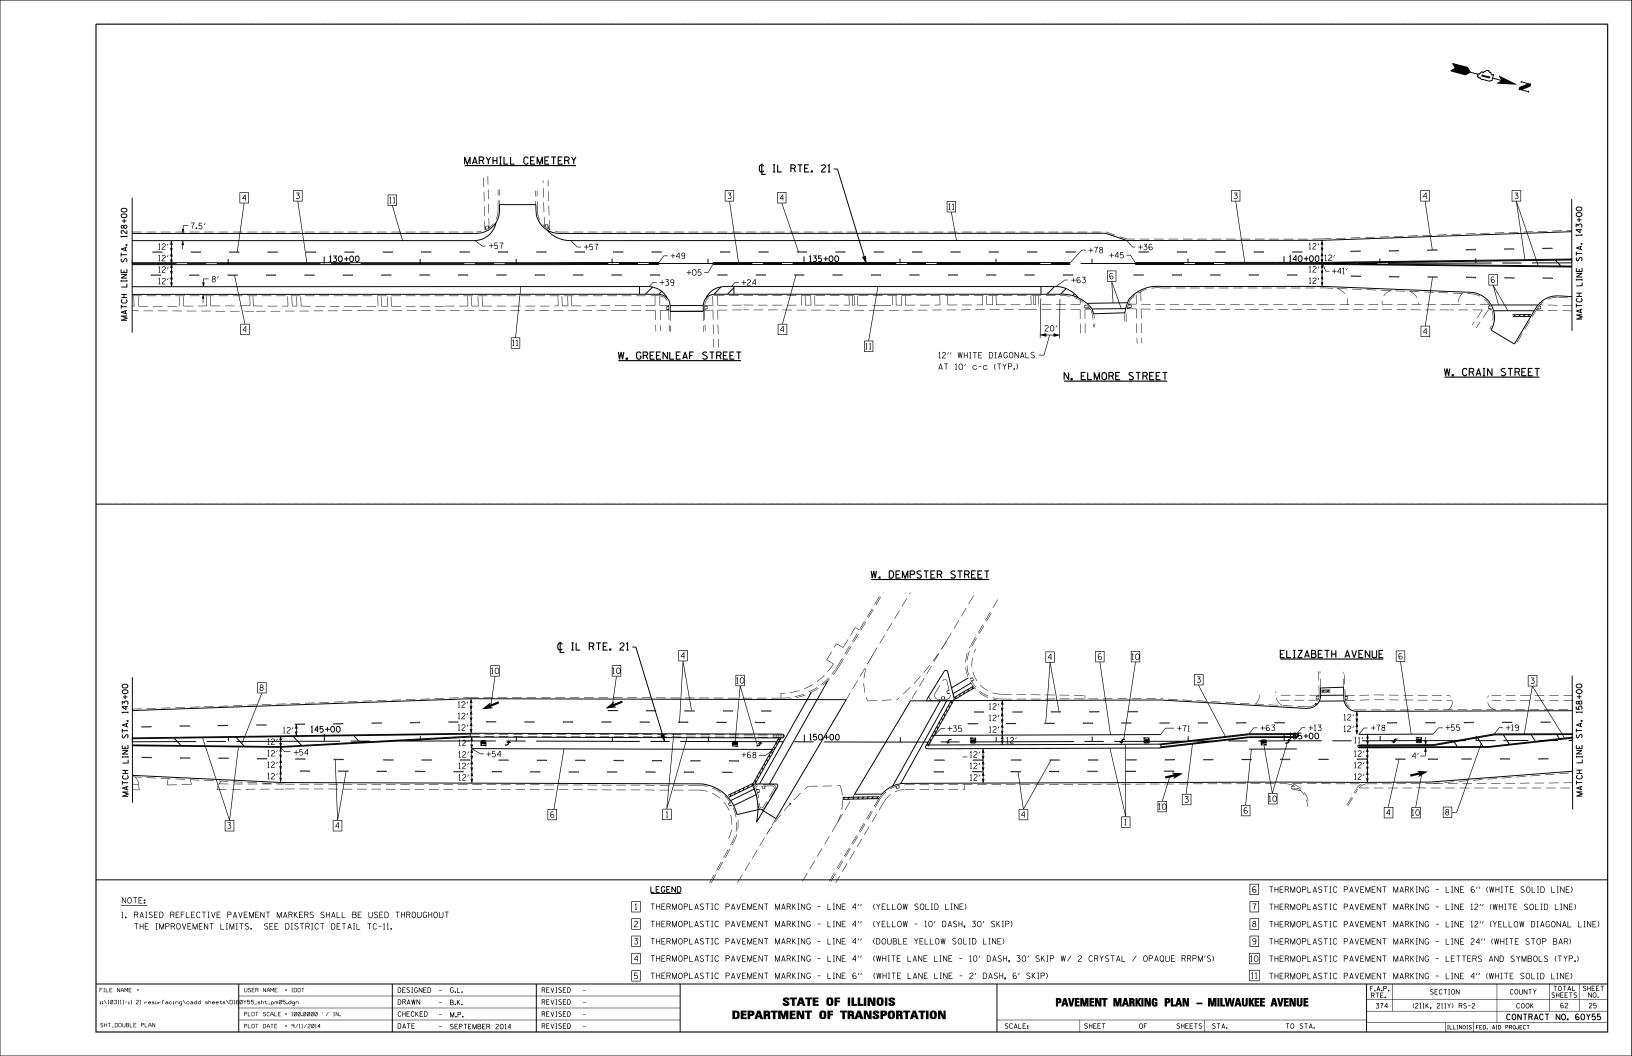

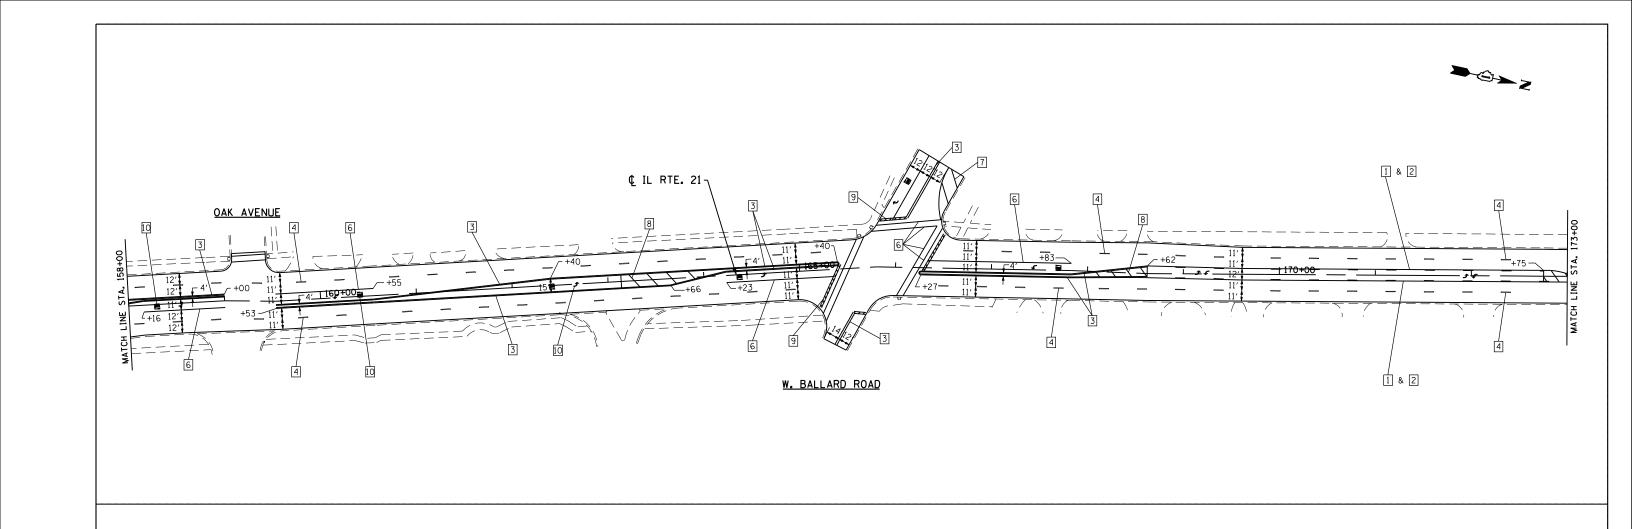

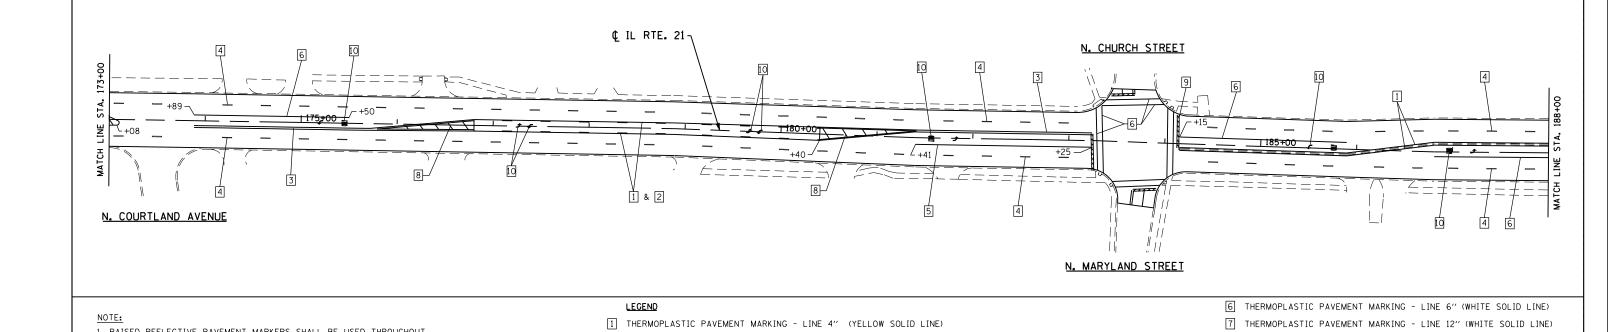

2 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (YELLOW - 10' DASH, 30' SKIP)

5 THERMOPLASTIC PAVEMENT MARKING - LINE 6" (WHITE LANE LINE - 2" DASH, 6" SKIP)

STATE OF ILLINOIS

DEPARTMENT OF TRANSPORTATION

4 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (WHITE LANE LINE - 10' DASH, 30' SKIP W/ 2 CRYSTAL / OPAQUE RRPM'S)

3 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (DOUBLE YELLOW SOLID LINE)

8 THERMOPLASTIC PAVEMENT MARKING - LINE 12" (YELLOW DIAGONAL LINE)

COUNTY TOTAL SHEET NO.

COOK 62 26

CONTRACT NO. 60Y55

9 THERMOPLASTIC PAVEMENT MARKING - LINE 24" (WHITE STOP BAR)

10 THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS (TYP.)

11 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (WHITE SOLID LINE)

PAVEMENT MARKING PLAN - MILWAUKEE AVENUE

OF SHEETS STA.

1. RAISED REFLECTIVE PAVEMENT MARKERS SHALL BE USED THROUGHOUT

DESIGNED - G.L.

DRAWN - B.K.

CHECKED - M.P.

DATE - SEPTEMBER 2014

REVISED

REVISED

REVISED

REVISED

THE IMPROVEMENT LIMITS. SEE DISTRICT DETAIL TC-11.

USER NAME = IDOT


PLOT SCALE = 100.0000 '/ IN.


PLOT DATE = 9/11/2014

0Y55_sht_pm06.dgn

FILE NAME =

ı:\103111-ıl 21 resurfacı

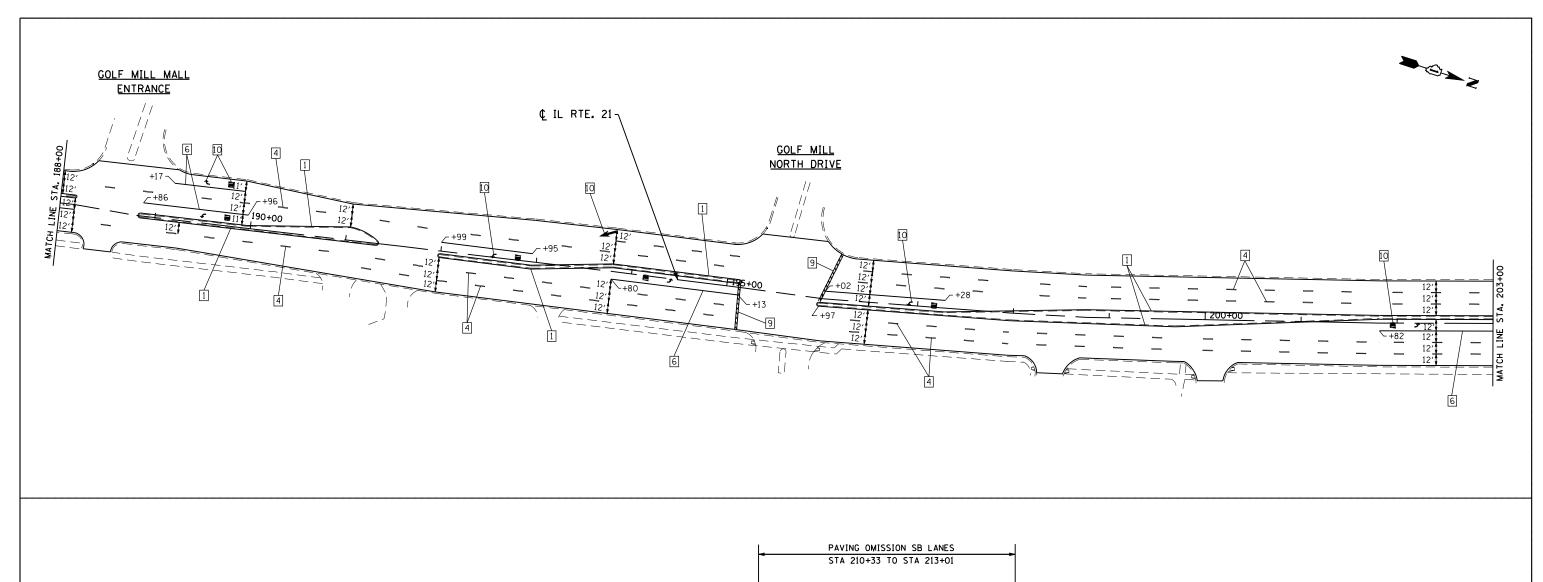

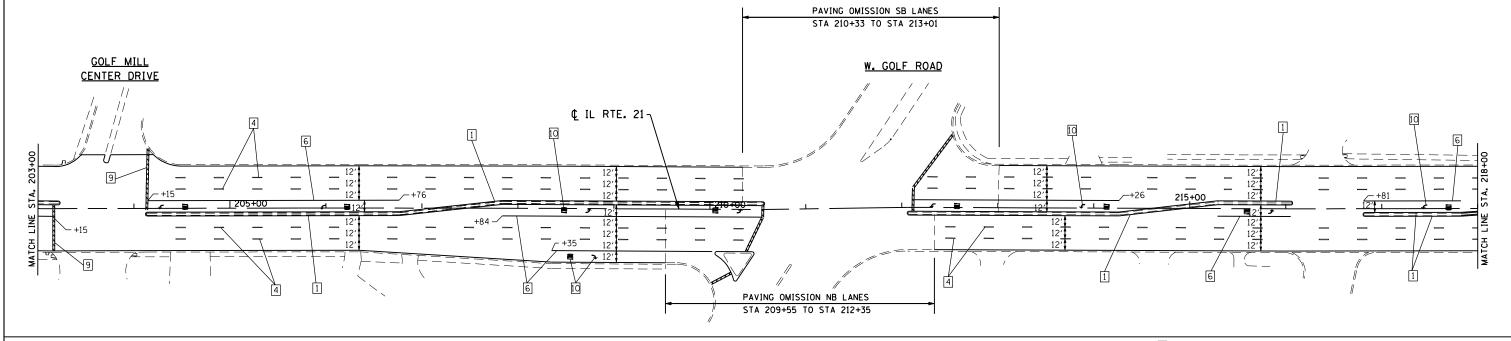

NOTE:

1. RAISED REFLECTIVE PAVEMENT MARKERS SHALL BE USED THROUGHOUT THE IMPROVEMENT LIMITS. SEE DISTRICT DETAIL TC-11.

PLOT DATE = 9/11/2014

LEGEND

- 1 THERMOPLASTIC PAVEMENT MARKING LINE 4" (YELLOW SOLID LINE)
- 2 THERMOPLASTIC PAVEMENT MARKING LINE 4" (YELLOW 10' DASH, 30' SKIP)
- 3 THERMOPLASTIC PAVEMENT MARKING LINE 4" (DOUBLE YELLOW SOLID LINE)
- 4 THERMOPLASTIC PAVEMENT MARKING LINE 4" (WHITE LANE LINE 10' DASH, 30' SKIP W/ 2 CRYSTAL / OPAQUE RRPM'S)
- 5 THERMOPLASTIC PAVEMENT MARKING LINE 6" (WHITE LANE LINE 2' DASH, 6' SKIP)

- 6 THERMOPLASTIC PAVEMENT MARKING LINE 6" (WHITE SOLID LINE)
- 7 THERMOPLASTIC PAVEMENT MARKING LINE 12" (WHITE SOLID LINE)
- 8 THERMOPLASTIC PAVEMENT MARKING LINE 12" (YELLOW DIAGONAL LINE)
- 9 THERMOPLASTIC PAVEMENT MARKING LINE 24" (WHITE STOP BAR)
- 10 THERMOPLASTIC PAVEMENT MARKING LETTERS AND SYMBOLS (TYP.)
- 11 THERMOPLASTIC PAVEMENT MARKING LINE 4" (WHITE SOLID LINE)
- FILE NAME = USER NAME = IDOT DESIGNED G.L. REVISED USER NAME = IDOT DESIGNED G.L. REVISED STATE OF ILLINOIS
 PLOT SCALE = 100.0000 // IN. CHECKED M.P. REVISED DEPARTMENT OF TRANSPORTATION


 REVISED DEPARTMENT OF TRANSPORTATION


REVISED

DATE - SEPTEMBER 2014

 PAVEMENT
 MARKING
 PLAN - MILWAUKEE
 AVENUE
 F.A.P. RTE.
 SECTION
 COUNTY SHEETS NO.
 SHEET NO.

 SCALE:
 SHEET
 OF
 SHEETS STA.
 TO STA.
 ILLINOIS FED. AID PROJECT
 NO. 60 Y55

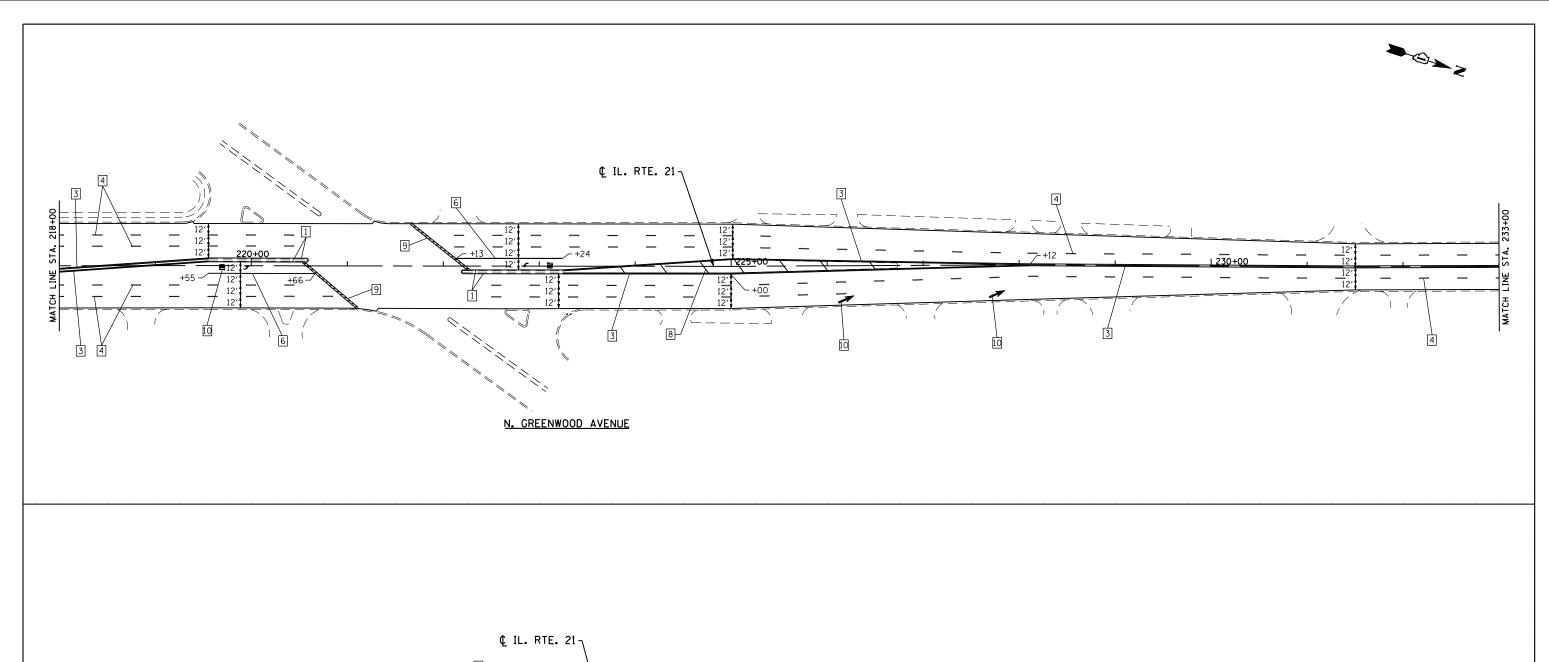

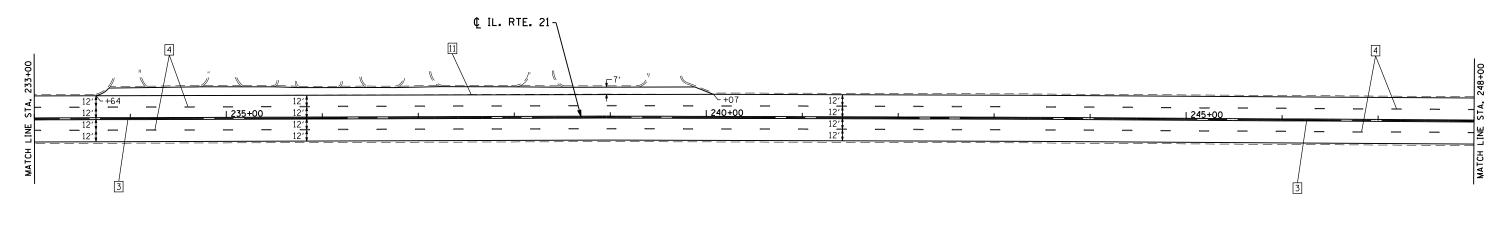

6 THERMOPLASTIC PAVEMENT MARKING - LINE 6" (WHITE SOLID LINE) 1 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (YELLOW SOLID LINE) 7 THERMOPLASTIC PAVEMENT MARKING - LINE 12" (WHITE SOLID LINE) 1. RAISED REFLECTIVE PAVEMENT MARKERS SHALL BE USED THROUGHOUT 2 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (YELLOW - 10' DASH, 30' SKIP) 8 THERMOPLASTIC PAVEMENT MARKING - LINE 12" (YELLOW DIAGONAL LINE) THE IMPROVEMENT LIMITS. SEE DISTRICT DETAIL TC-11. 3 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (DOUBLE YELLOW SOLID LINE) 9 THERMOPLASTIC PAVEMENT MARKING - LINE 24" (WHITE STOP BAR) 4 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (WHITE LANE LINE - 10' DASH, 30' SKIP W/ 2 CRYSTAL / OPAQUE RRPM'S) 10 THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS (TYP.) 5 THERMOPLASTIC PAVEMENT MARKING - LINE 6" (WHITE LANE LINE - 2" DASH, 6" SKIP) 11 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (WHITE SOLID LINE) FILE NAME = DESIGNED - G.L. REVISED -USER NAME = IDOT STATE OF ILLINOIS PAVEMENT MARKING PLAN - MILWAUKEE AVENUE 1:\103111-11 21 resurfac 0Y55_sht_pm08.dgn DRAWN - B.K. REVISED

DEPARTMENT OF TRANSPORTATION

OF SHEETS STA.


PLOT SCALE = 100.0000 '/ IN.

CHECKED - M.P.

DATE - SEPTEMBER 2014

REVISED


REVISED

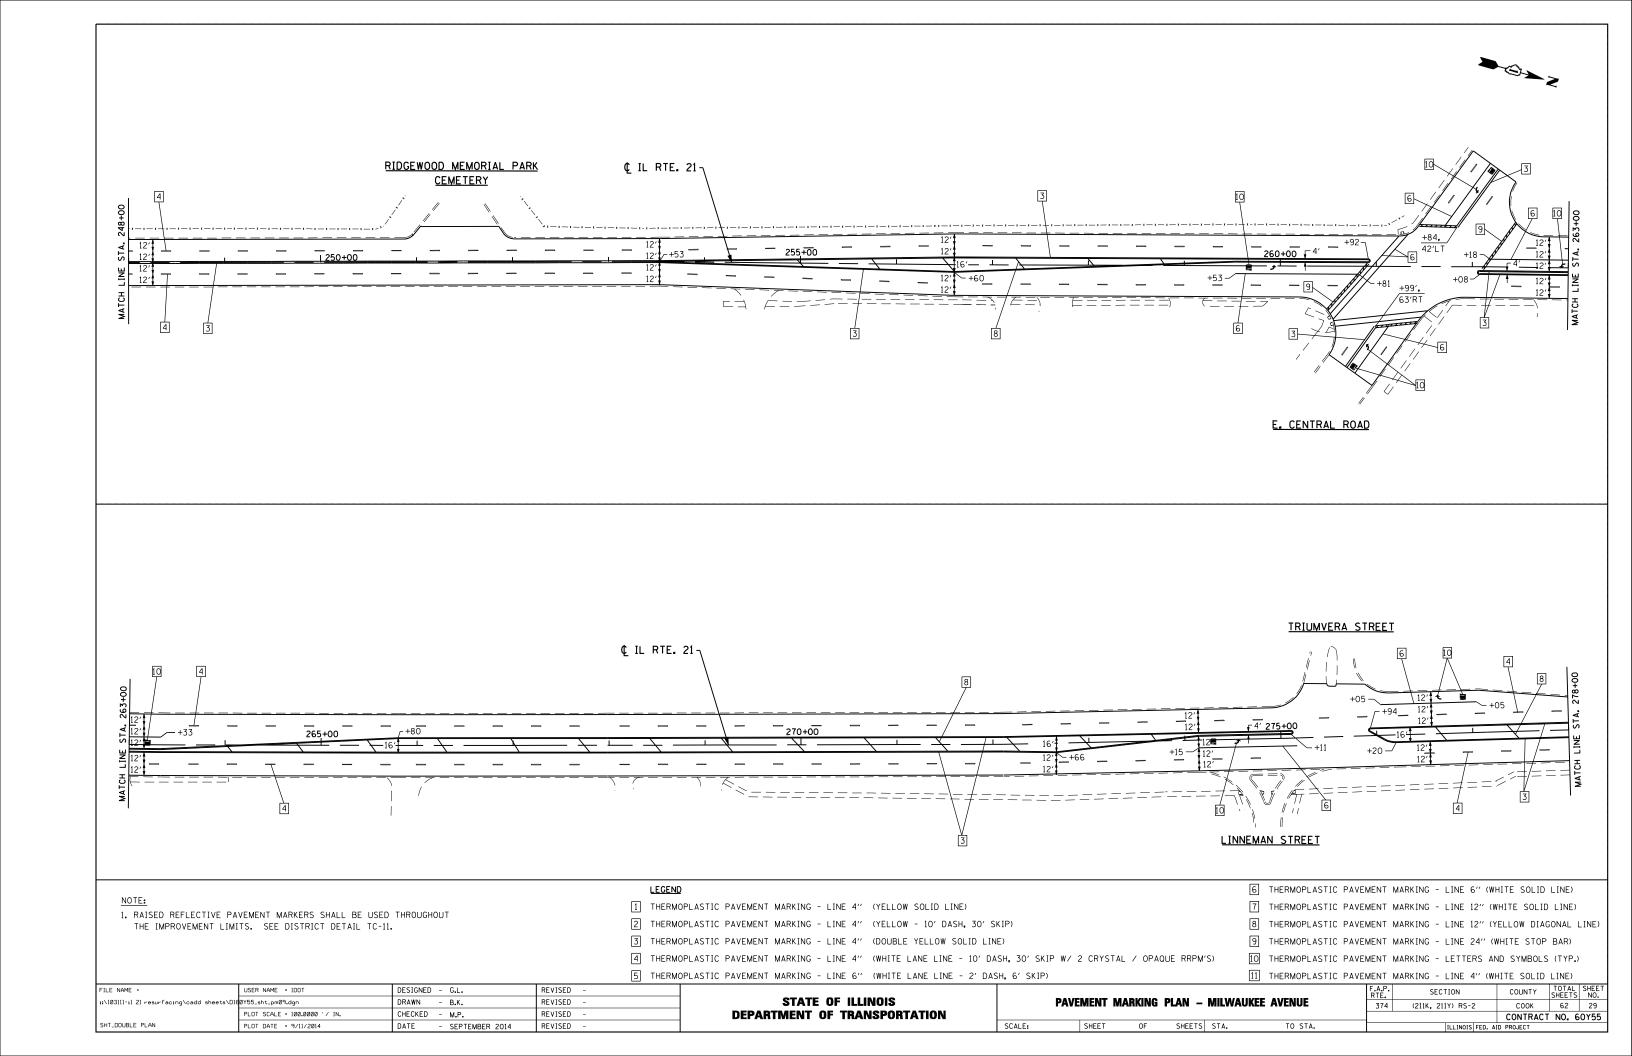




6 THERMOPLASTIC PAVEMENT MARKING - LINE 6" (WHITE SOLID LINE)

7 THERMOPLASTIC PAVEMENT MARKING - LINE 12" (WHITE SOLID LINE)

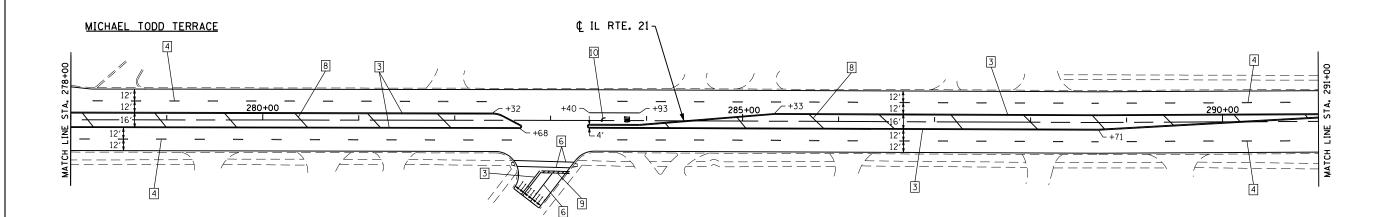


COUNTRYSIDE LANE

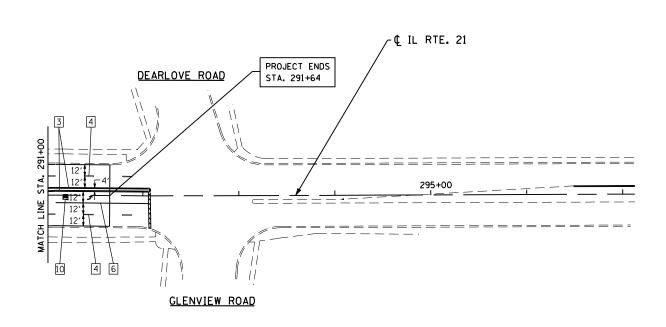


1. RAISED REFLECTIVE PAVEMENT MARKERS SHALL BE USED THROUGHOUT

2 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (YELLOW - 10' DASH, 30' SKIP) 8 THERMOPLASTIC PAVEMENT MARKING - LINE 12" (YELLOW DIAGONAL LINE) THE IMPROVEMENT LIMITS. SEE DISTRICT DETAIL TC-11. 3 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (DOUBLE YELLOW SOLID LINE) 9 THERMOPLASTIC PAVEMENT MARKING - LINE 24" (WHITE STOP BAR) 4 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (WHITE LANE LINE - 10' DASH, 30' SKIP W/ 2 CRYSTAL / OPAQUE RRPM'S) 10 THERMOPLASTIC PAVEMENT MARKING - LETTERS AND SYMBOLS (TYP.) 5 THERMOPLASTIC PAVEMENT MARKING - LINE 6" (WHITE LANE LINE - 2" DASH, 6" SKIP) 11 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (WHITE SOLID LINE) COUNTY TOTAL SHEET NO. COOK 62 30 FILE NAME = DESIGNED - G.L. REVISED USER NAME = IDOT STATE OF ILLINOIS PAVEMENT MARKING PLAN - MILWAUKEE AVENUE 1:\103111-11 21 resurfaci 0Y55_sht_pm10.dgn DRAWN - B.K. REVISED (211K, 211Y) RS-2 PLOT SCALE = 100.0000 '/ IN. CHECKED - M.P. REVISED **DEPARTMENT OF TRANSPORTATION** CONTRACT NO. 60Y55 OF SHEETS STA. PLOT DATE = 9/11/2014 DATE - SEPTEMBER 2014 REVISED

1 THERMOPLASTIC PAVEMENT MARKING - LINE 4" (YELLOW SOLID LINE)

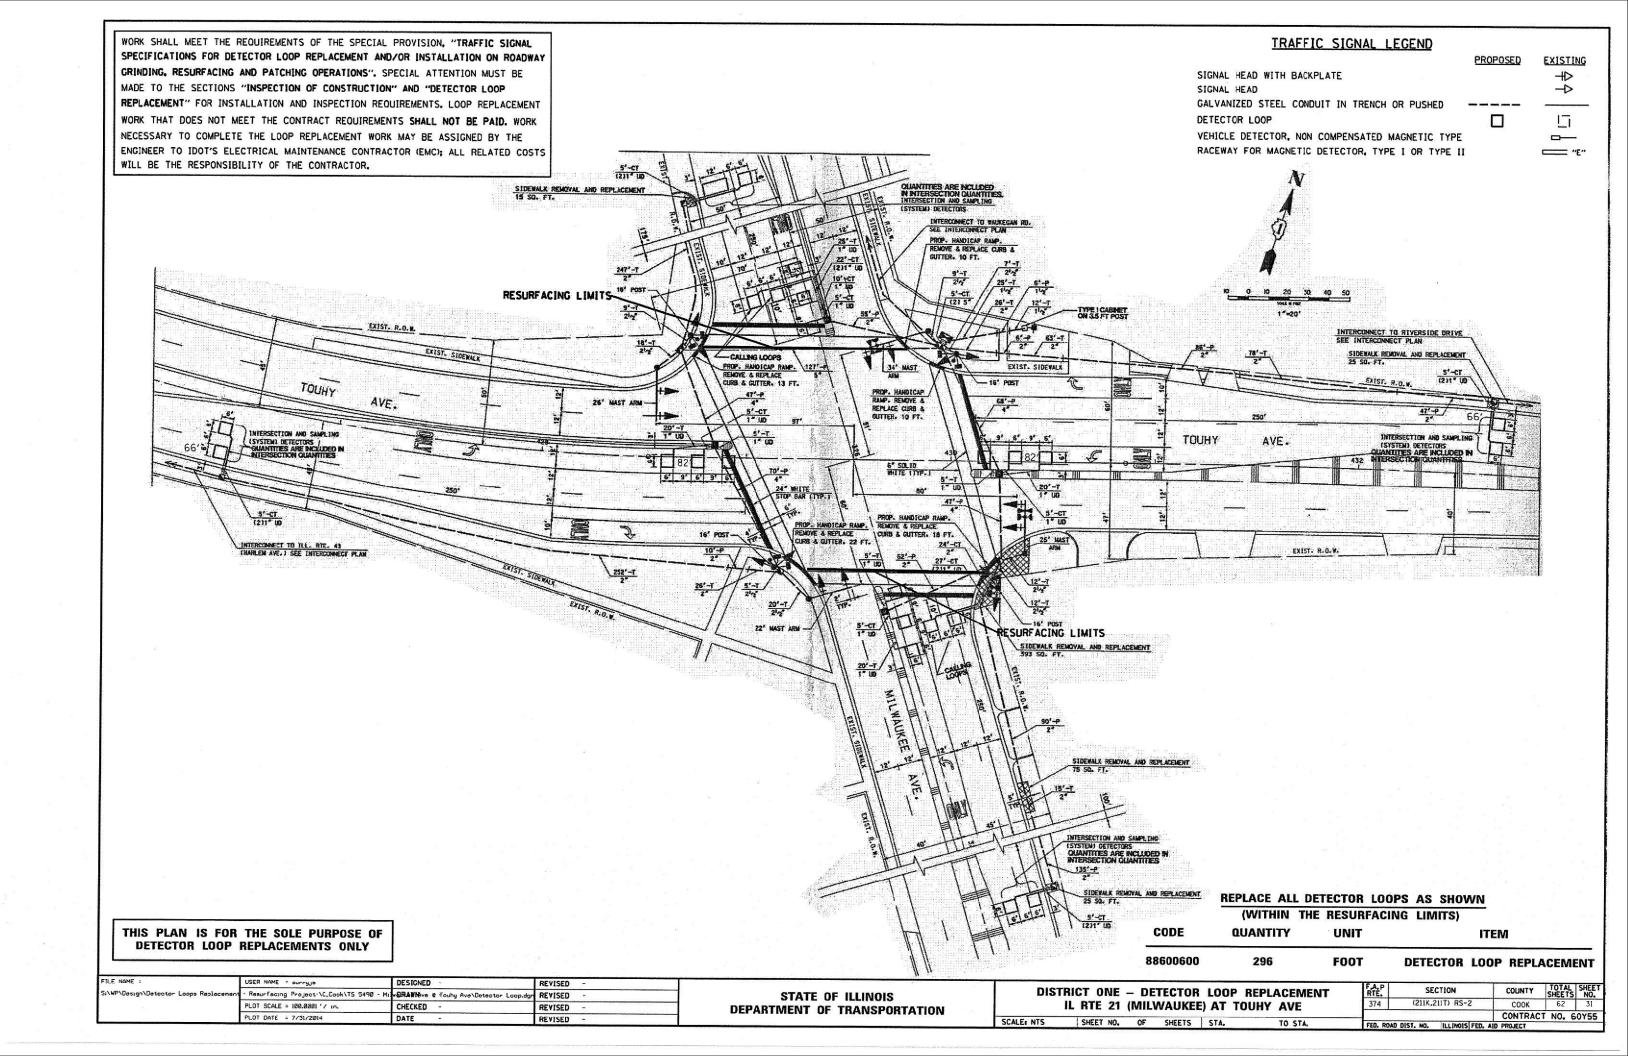



TRAFFIC SIGNAL LEGEND WORK SHALL MEET THE REQUIREMENTS OF THE SPECIAL PROVISION, "TRAFFIC SIGNAL SPECIFICATIONS FOR DETECTOR LOOP REPLACEMENT AND/OR INSTALLATION ON ROADWAY PROPOSED EXISTING GRINDING, RESURFACING AND PATCHING OPERATIONS". SPECIAL ATTENTION MUST BE SIGNAL HEAD WITH BACKPLATE +MADE TO THE SECTIONS "INSPECTION OF CONSTRUCTION" AND "DETECTOR LOOP \rightarrow SIGNAL HEAD REPLACEMENT" FOR INSTALLATION AND INSPECTION REQUIREMENTS. LOOP REPLACEMENT GALVANIZED STEEL CONDUIT IN TRENCH OR PUSHED WORK THAT DOES NOT MEET THE CONTRACT REQUIREMENTS SHALL NOT BE PAID. WORK DETECTOR LOOP NECESSARY TO COMPLETE THE LOOP REPLACEMENT WORK MAY BE ASSIGNED BY THE VEHICLE DETECTOR, NON COMPENSATED MAGNETIC TYPE ___ ENGINEER TO IDOT'S ELECTRICAL MAINTENANCE CONTRACTOR (EMC): ALL RELATED COSTS RACEWAY FOR MAGNETIC DETECTOR, TYPE I OR TYPE II WILL BE THE RESPONSIBILITY OF THE CONTRACTOR. EXIST. R.O.W. EXIST. SIDEWALK MILWAUKEE MEDIAN REMOVAL AND REPLACEMENT AVENUE INTERSECTION AND SAMPLING (SYSTEM) DETECTORS QUANTITIES ARE ROCLODED IN INTERSECTION QUANTITIES 325 NTERSECTION AND SAMPLING SYSTEM) DETECTORS SIDEWALK REMOVAL AND REPLACEMENT REPLACE ALL DETECTOR LOOPS AS SHOWN (WITHIN THE RESURFACING LIMITS) THIS PLAN IS FOR THE SOLE PURPOSE OF CODE QUANTITY UNIT ITEM **DETECTOR LOOP REPLACEMENTS ONLY** 88600600 210 FOOT **DETECTOR LOOP REPLACEMENT** FILE NAME . DESIGNED REVISED SECTION DISTRICT ONE - DETECTOR LOOP REPLACEMENT Resurfacing Project-\C_Cook\TS 5495 - IL 2DRAWNikee Ave & IL 43 Voukegan Rd\DetecREV[SED.dgn STATE OF ILLINOIS COOK 374 3(211K,211T) RS-2 IL RTE 21 (MILWAUKEE AVE) AT WAUKEGAN RD PLOT SCALE = 100.0001 '/ in. CHECKED -REVISED **DEPARTMENT OF TRANSPORTATION** CONTRACT NO. 60Y55 PLOT DATE = 7/38/2014 DATE REVISED SHEET NO. OF SHEETS STA. SCALE: NTS

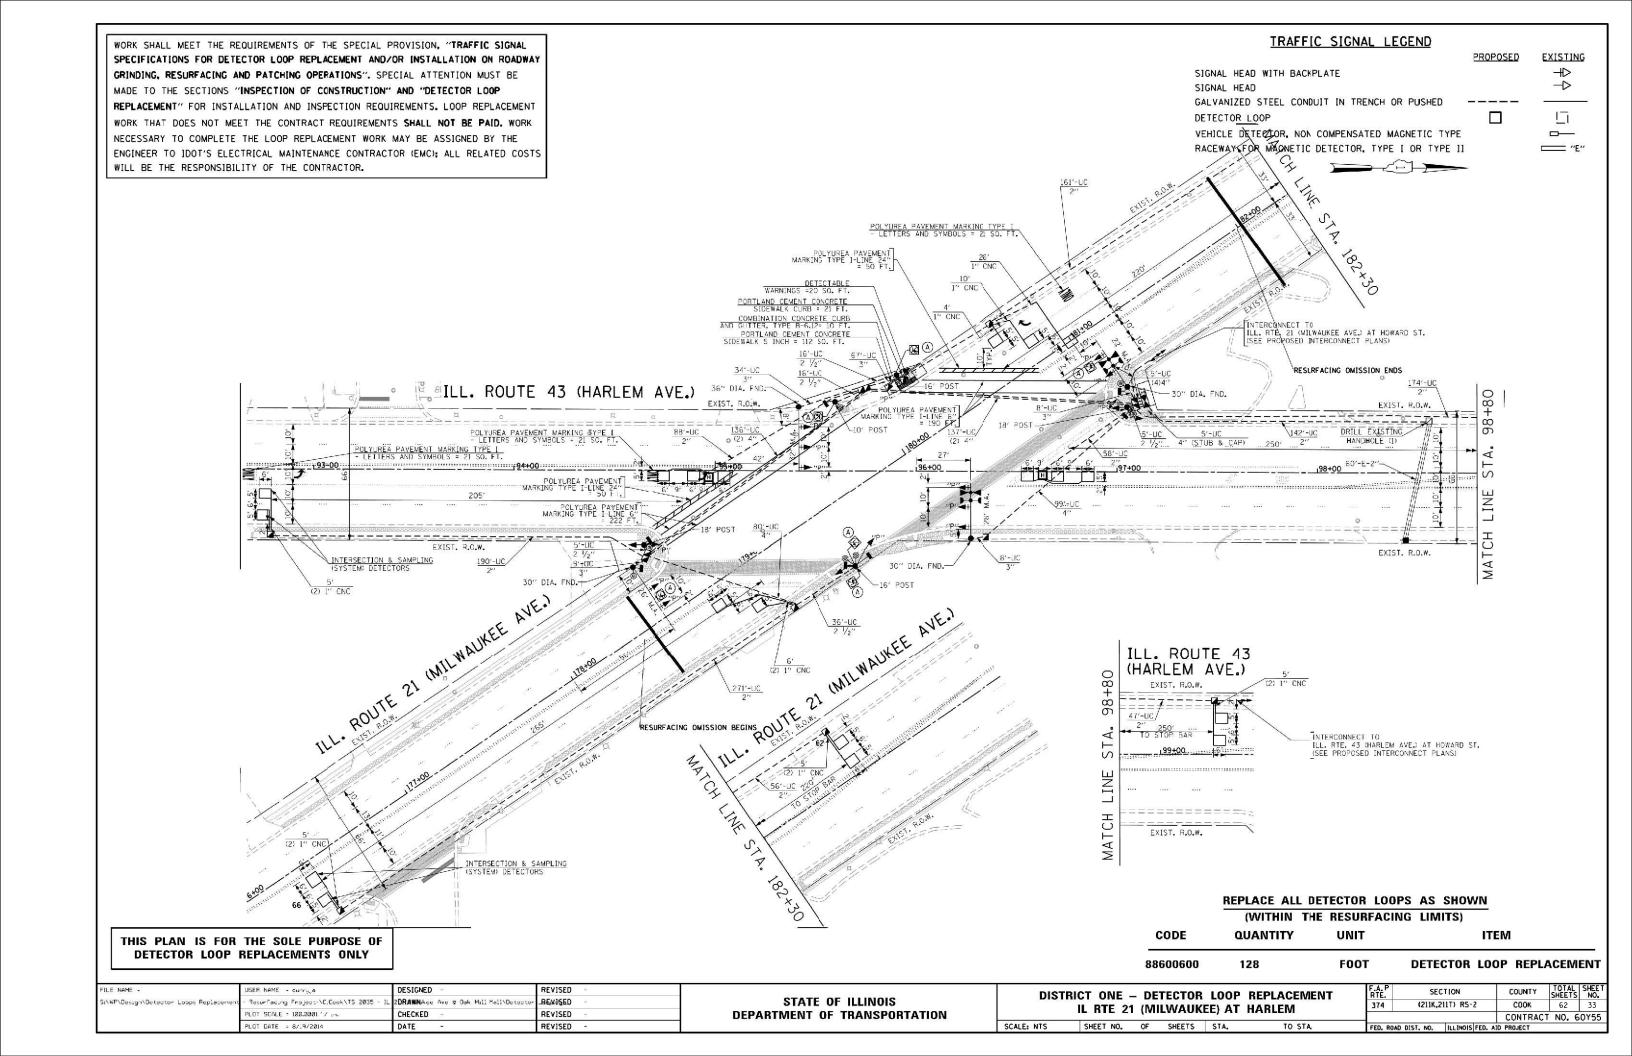


TRAFFIC SIGNAL LEGEND WORK SHALL MEET THE REQUIREMENTS OF THE SPECIAL PROVISION, "TRAFFIC SIGNAL PROPOSED **EXISTING** SPECIFICATIONS FOR DETECTOR LOOP REPLACEMENT AND/OR INSTALLATION ON ROADWAY $\dashv \triangleright$ SIGNAL HEAD WITH BACKPLATE GRINDING, RESURFACING AND PATCHING OPERATIONS". SPECIAL ATTENTION MUST BE \rightarrow SIGNAL HEAD MADE TO THE SECTIONS "INSPECTION OF CONSTRUCTION" AND "DETECTOR LOOP GALVANIZED STEEL CONDUIT IN TRENCH OR PUSHED REPLACEMENT" FOR INSTALLATION AND INSPECTION REQUIREMENTS. LOOP REPLACEMENT 듸 DETECTOR LOOP WORK THAT DOES NOT MEET THE CONTRACT REQUIREMENTS SHALL NOT BE PAID. WORK VEHICLE DETECTOR, NON COMPENSATED MAGNETIC TYPE \Box NECESSARY TO COMPLETE THE LOOP REPLACEMENT WORK MAY BE ASSIGNED BY THE RACEWAY FOR MAGNETIC DETECTOR, TYPE [OR TYPE]] □== "E" ENGINEER TO IDOT'S ELECTRICAL MAINTENANCE CONTRACTOR (EMC); ALL RELATED COSTS WILL BE THE RESPONSIBILITY OF THE CONTRACTOR. HERMOPLASTIC PAVEMENT ROUTE 21 MILWAUKEE AVE. 14' 1" CNC OCONTO AVE. THERMOPLASTIC PAVEMENT
MARKING - LINE 24" = 13 FT. INTERSECTION & SAMPLING (SYSTEM) DETECTORS (2) 1" CNC/ ILL. ROUTE 21 MILWAUKEE AVE. (2) 1" CNC INTERCONNECT TO HARLEM AVE.
(SEE PROPOSED INTERCONNECT PLANS) RESURFACTING LEMITS ST. HOWARD® THERMOPLASTIC PAVEMENT MARKING -LETTERS AND SYMBOLS = 21 SO. FT. THERMOPLASTIC PAVEMENT MARKING - LINE 6" = 132 FT REPLACE ALL DETECTOR LOOPS AS SHOWN (WITHIN THE RESURFACING LIMITS) MATCH LINE STA. 199+20 CODE QUANTITY UNIT ITEM THIS PLAN IS FOR THE SOLE PURPOSE OF DETECTOR LOOP REPLACEMENTS ONLY 88600600 578 **FOOT DETECTOR LOOP REPLACEMENT**

FI	E NAME -	USER NAME - curry,e	DESIGNED -	REVISED -		DISTE	RICT ONE -	- DET	FCTOR	LOOP	REPLACEMENT	F.A.P RTE.	SECTION	COUNTY	TOTAL SHEET:	
Si	WP\Design\Detector Loops Replacement	- Resumfacing Project-\C.Cook\TS 2035 - IL	2DRAWNikee Ave & Oak Mill Mall Noetector	- REWISED -	STATE OF ILLINOIS	D.011						374	(211K,211T) RS-2	COOK	62	34
- 1		PLOT SCALE = 100.0001 ' / in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION		IL RTE 21	(IVIIL	WAUKI	EE) AI F	UWAKD		, en casa de C ara, puen al — en principale	CONTRAC	T NO.	60Y5
		PLOT DATE = 8/15/2014	DATE -	REVISED -	CO 600 page (1972 program code) in a separation of the program of	SCALE: NTS	SHEET NO.	OF	SHEETS	STA.	TO STA	FED. ROAD	DIST. NO. ILLINOIS FED.			

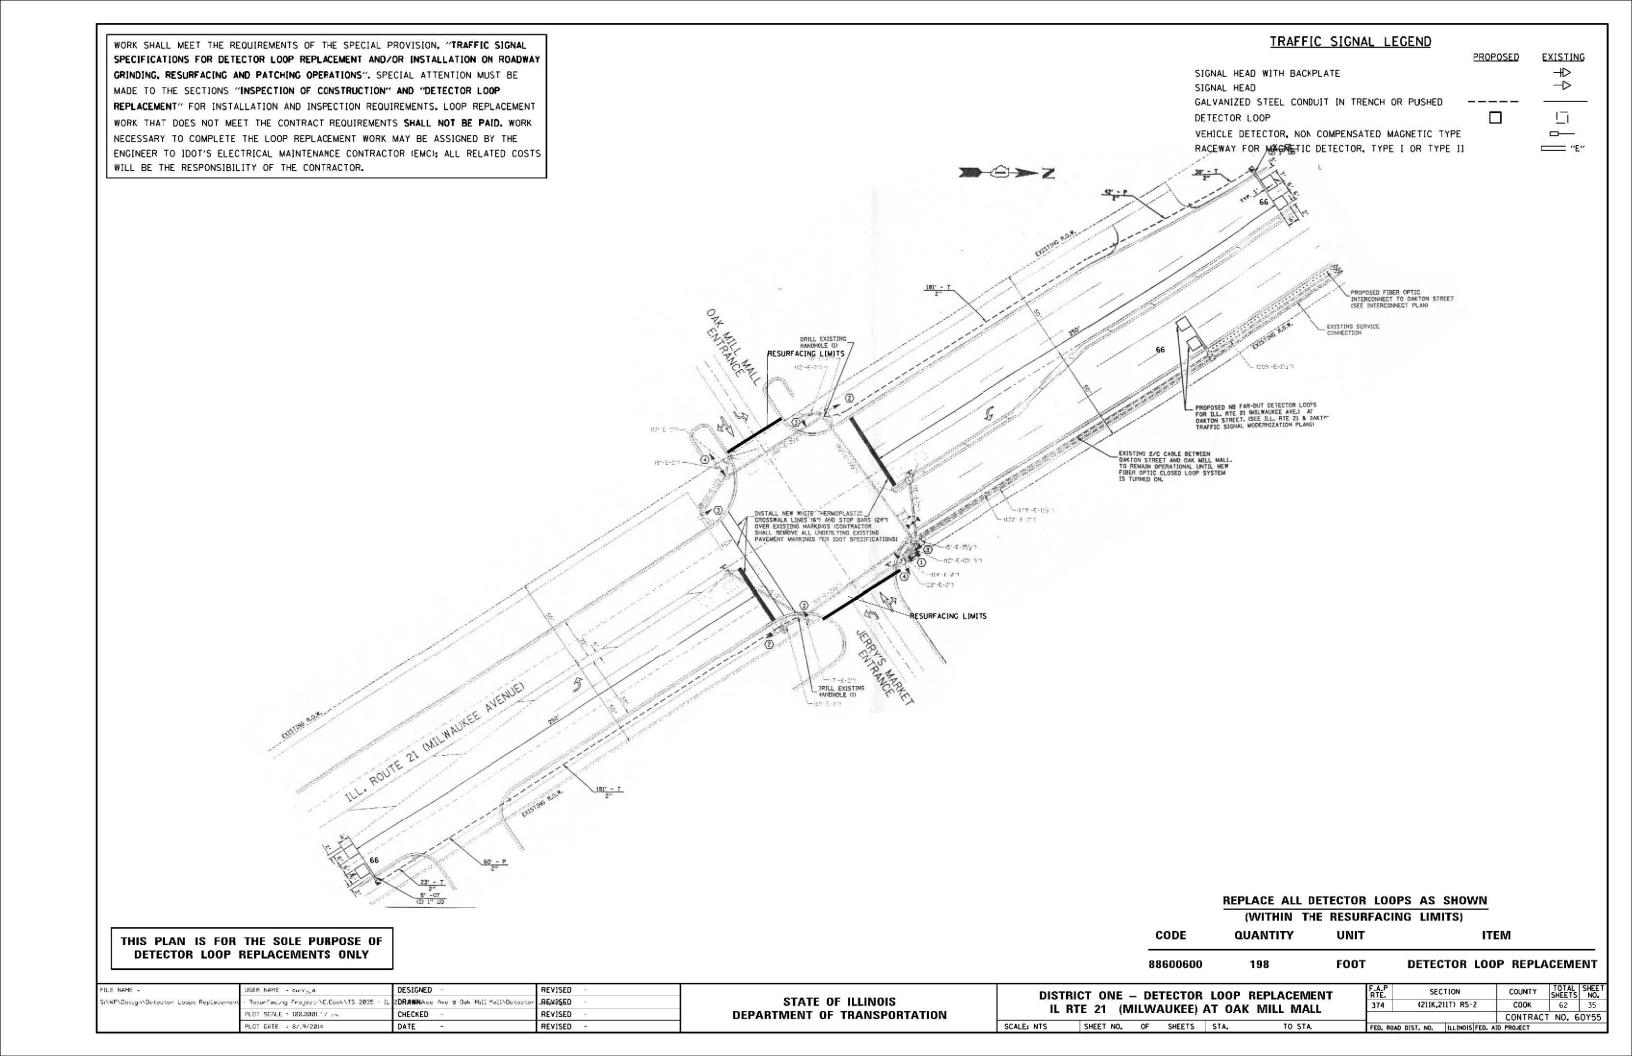

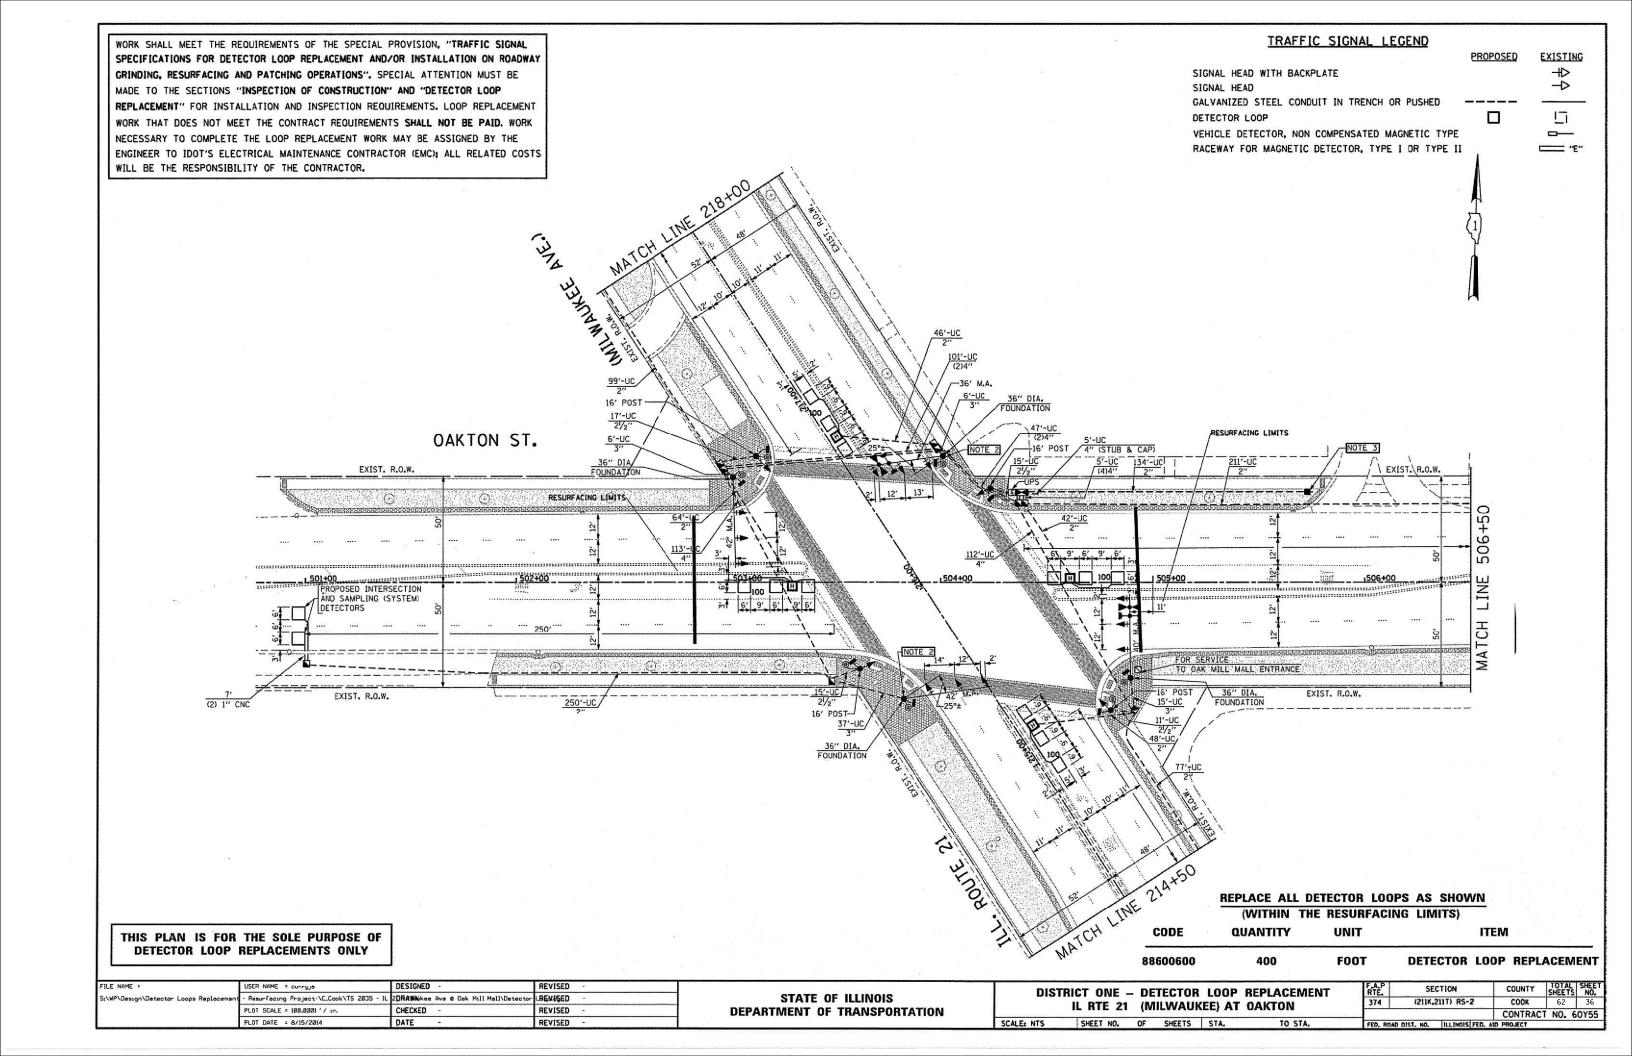

WORK SHALL MEET THE REQUIREMENTS OF THE SPECIAL PROVISION, "TRAFFIC SIGNAL SPECIFICATIONS FOR DETECTOR LOOP REPLACEMENT AND/OR INSTALLATION ON ROADWAY GRINDING, RESURFACING AND PATCHING OPERATIONS". SPECIAL ATTENTION MUST BE MADE TO THE SECTIONS "INSPECTION OF CONSTRUCTION" AND "DETECTOR LOOP REPLACEMENT" FOR INSTALLATION AND INSPECTION REQUIREMENTS. LOOP REPLACEMENT WORK THAT DOES NOT MEET THE CONTRACT REQUIREMENTS SHALL NOT BE PAID. WORK NECESSARY TO COMPLETE THE LOOP REPLACEMENT WORK MAY BE ASSIGNED BY THE ENGINEER TO IDOT'S ELECTRICAL MAINTENANCE CONTRACTOR (EMC); ALL RELATED COSTS WILL BE THE RESPONSIBILITY OF THE CONTRACTOR.

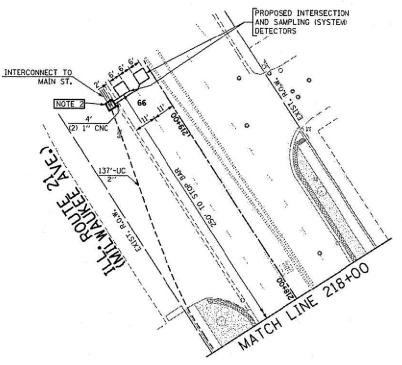

MATCH LIME 21A+50

MATCH LIME 21A+50

MOTE 2

INTERCONNECT TO OAK MILL MALL

THIS PLAN IS FOR THE SOLE PURPOSE OF DETECTOR LOOP REPLACEMENTS ONLY

REPLACE ALL DETECTOR LOOPS AS SHOWN

TRAFFIC SIGNAL LEGEND

GALVANIZED STEEL CONDUIT IN TRENCH OR PUSHED

VEHICLE DETECTOR, NON COMPENSATED MAGNETIC TYPE

RACEWAY FOR MAGNETIC DETECTOR, TYPE I OR TYPE II

SIGNAL HEAD WITH BACKPLATE

SIGNAL HEAD

DETECTOR LOOP

PROPOSED

EXISTING

->

 \Box

__

(WITHIN THE RESURFACING LIMITS)

CODE

QUANTITY

UNIT

ITEM

88600600

132

FOOT


DETECTOR LOOP REPLACEMENT


| DESIGNED | PLOT DATE | 8/15/2014 | DESIGNED | REVISED | REVISED | PROJECT | REVISED | PROJECT | REVISED | PROJECT | REVISED | REVISED | PLOT DATE | 8/15/2014 | DATE | REVISED | REVISED | REVISED | PROJECT | REVISED | REVISED | PROJECT | REVISED | PROJECT | REVISED | REVISED | PROJECT | PROJECT | REVISED | PROJECT | PROJECT


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

DISTRICT ONE — DETECTOR LOOP REPLACEMENT
IL RTE 21 (MILWAUKEE) AT OAKTON PG 2


SCALE: NTS SHEET NO. OF SHEETS STA. TO STA.

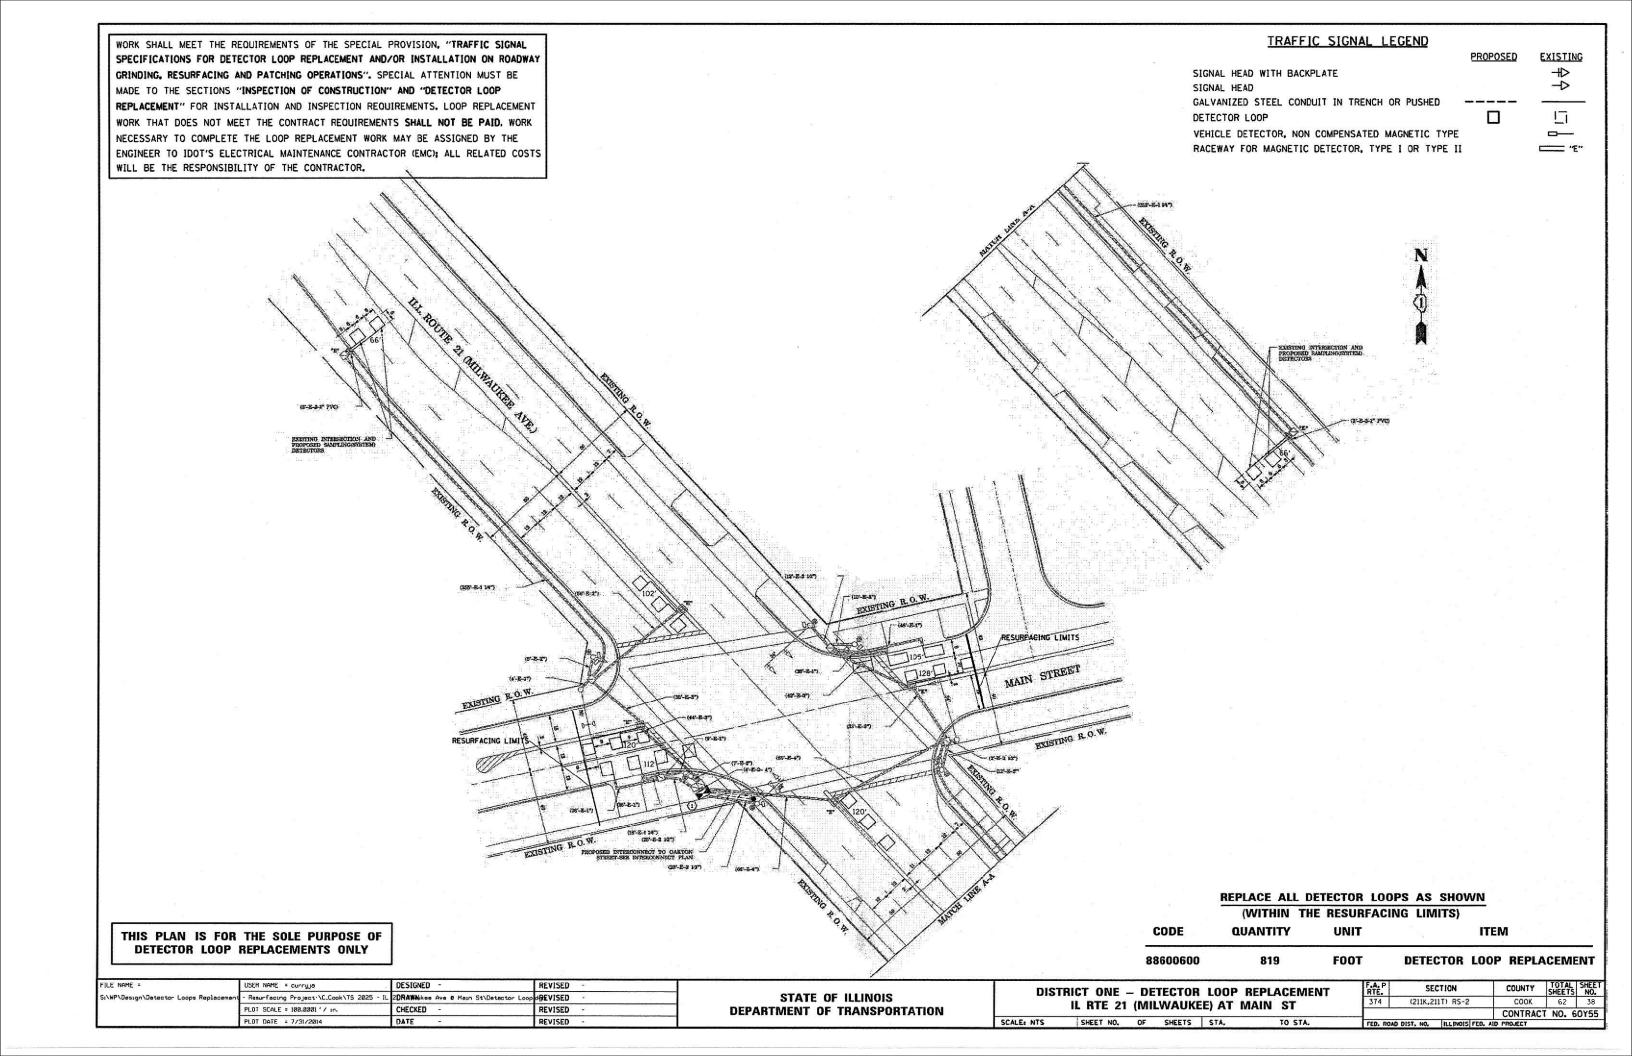


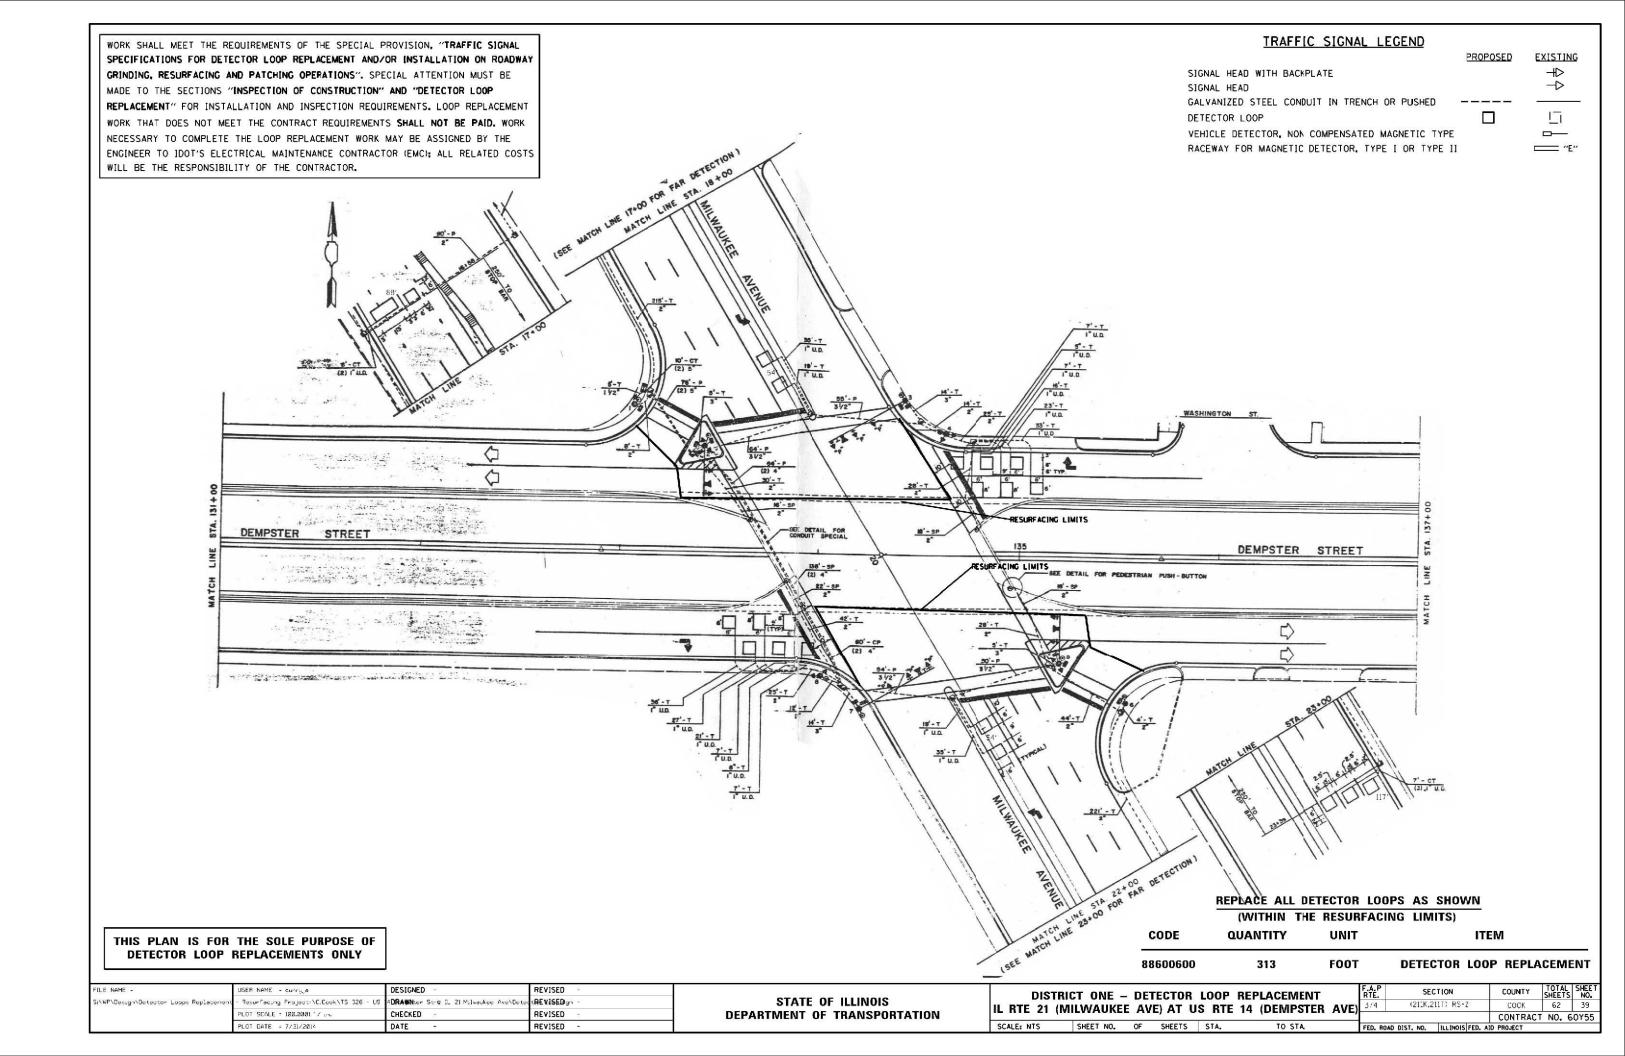


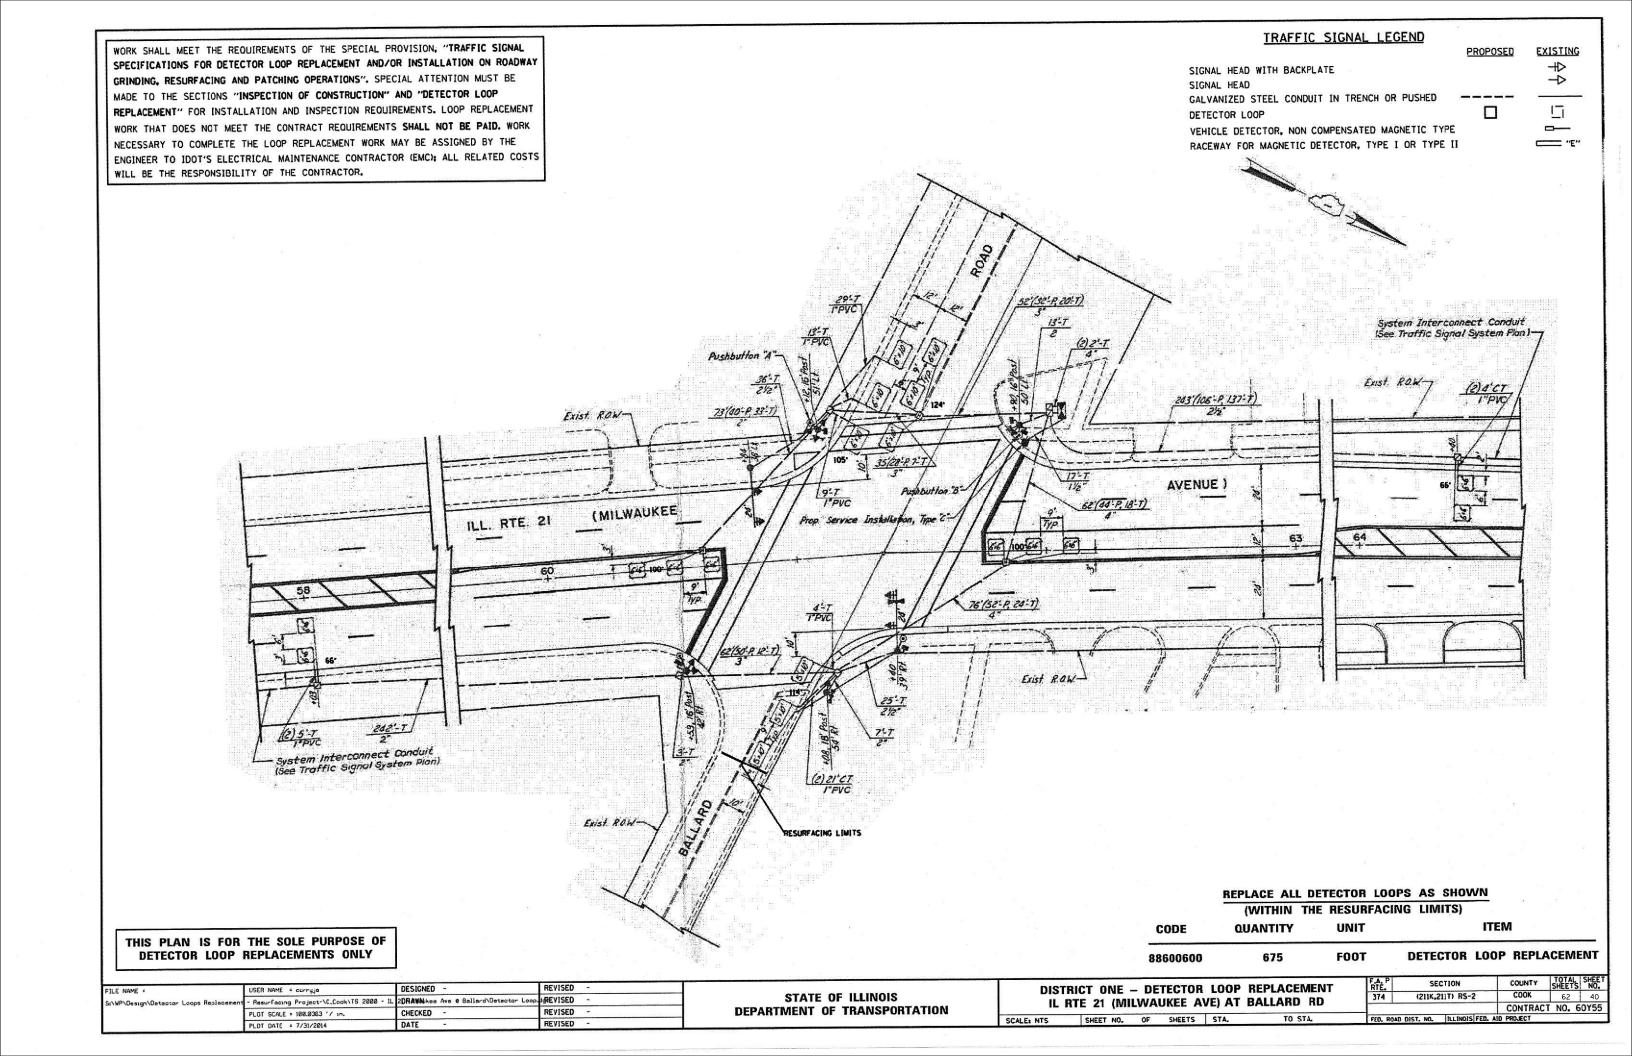


TRAFFIC SIGNAL LEGEND WORK SHALL MEET THE REQUIREMENTS OF THE SPECIAL PROVISION, "TRAFFIC SIGNAL PROPOSED EXISTING SPECIFICATIONS FOR DETECTOR LOOP REPLACEMENT AND/OR INSTALLATION ON ROADWAY SIGNAL HEAD WITH BACKPLATE CRINDING, RESURFACING AND PATCHING OPERATIONS". SPECIAL ATTENTION MUST BE \neg SIGNAL HEAD MADE TO THE SECTIONS "INSPECTION OF CONSTRUCTION" AND "DETECTOR LOOP GALVANIZED STEEL CONDUIT IN TRENCH OR PUSHED REPLACEMENT" FOR INSTALLATION AND INSPECTION REQUIREMENTS. LOOP REPLACEMENT DETECTOR LOOP WORK THAT DOES NOT MEET THE CONTRACT REQUIREMENTS SHALL NOT BE PAID. WORK VEHICLE DETECTOR, NON COMPENSATED MAGNETIC TYPE NECESSARY TO COMPLETE THE LOOP REPLACEMENT WORK MAY BE ASSIGNED BY THE RACEWAY FOR MAGNETIC DETECTOR, TYPE I OR TYPE II ENGINEER TO IDOT'S ELECTRICAL MAINTENANCE CONTRACTOR (EMC); ALL RELATED COSTS WILL BE THE RESPONSIBILITY OF THE CONTRACTOR. Exist. ROW-SURFACING LIMITS 38. 14 Post 747 1*PVC 81.5, 18'Post 45'Lt Exist ROW --Exist ROW -Exist Edge of Povement (See Traffic Signal System Planty + 60, 16" Post 5 45. Prop. Edge of Povement (See Traffic Signal System Plani 46'(41'P.5'7) 40'(23'P.177) 1-PVC 8-7 ILL. RTE. 21 MILWAUKEE AVENUE 47'(38'P,9'T) 35 (27'P.8T) TO THE (a) (b) (2)2'-7 Exist R.O.W. 21/2" Prop. Edge of Poveme 12'-7 Exist Edge of Povement 11/2" REPLACE ALL DETECTOR LOOPS AS SHOWN (WITHIN THE RESURFACING LIMITS) CODE QUANTITY ITEM THIS PLAN IS FOR THE SOLE PURPOSE OF DETECTOR LOOP REPLACEMENTS ONLY FOOT **DETECTOR LOOP REPLACEMENT** 88600600 806 SECTION COUNTY REVISED FILE NAME : DESIGNED DISTRICT ONE - DETECTOR LOOP REPLACEMENT STATE OF ILLINOIS (211K,211T) RS-2 -REVISED 62 41 DRAWNikes Ave & Maryland Detector L S:\WP\Design\Detector Loops Replacem Resurfacing Project \C_Cook\TS 2030 - 1 IL RTE 21 (MILWAUKEE AVE) AT MARYLAND ST **DEPARTMENT OF TRANSPORTATION** CONTRACT NO. 60Y55 REVISED PLOT SCALE = 100.0001 '/ in. CHECKED SHEET NO. OF SHEETS STA. PLOT DATE = 7/31/2014 DATE REVISED

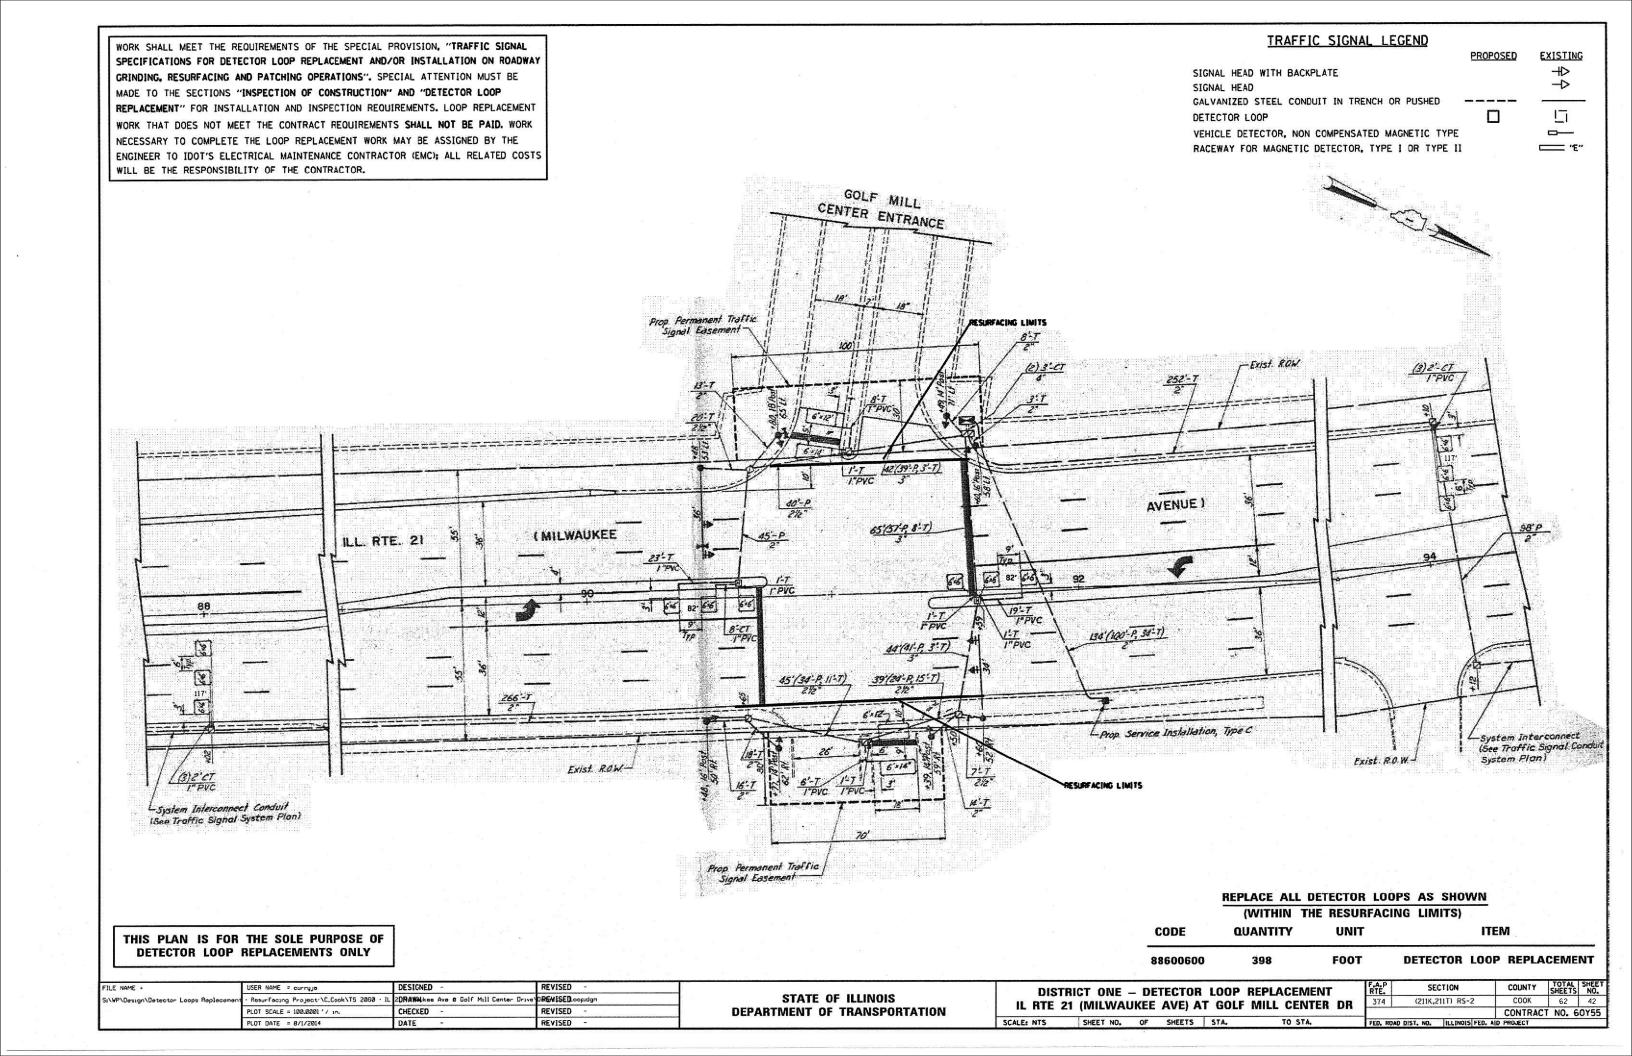


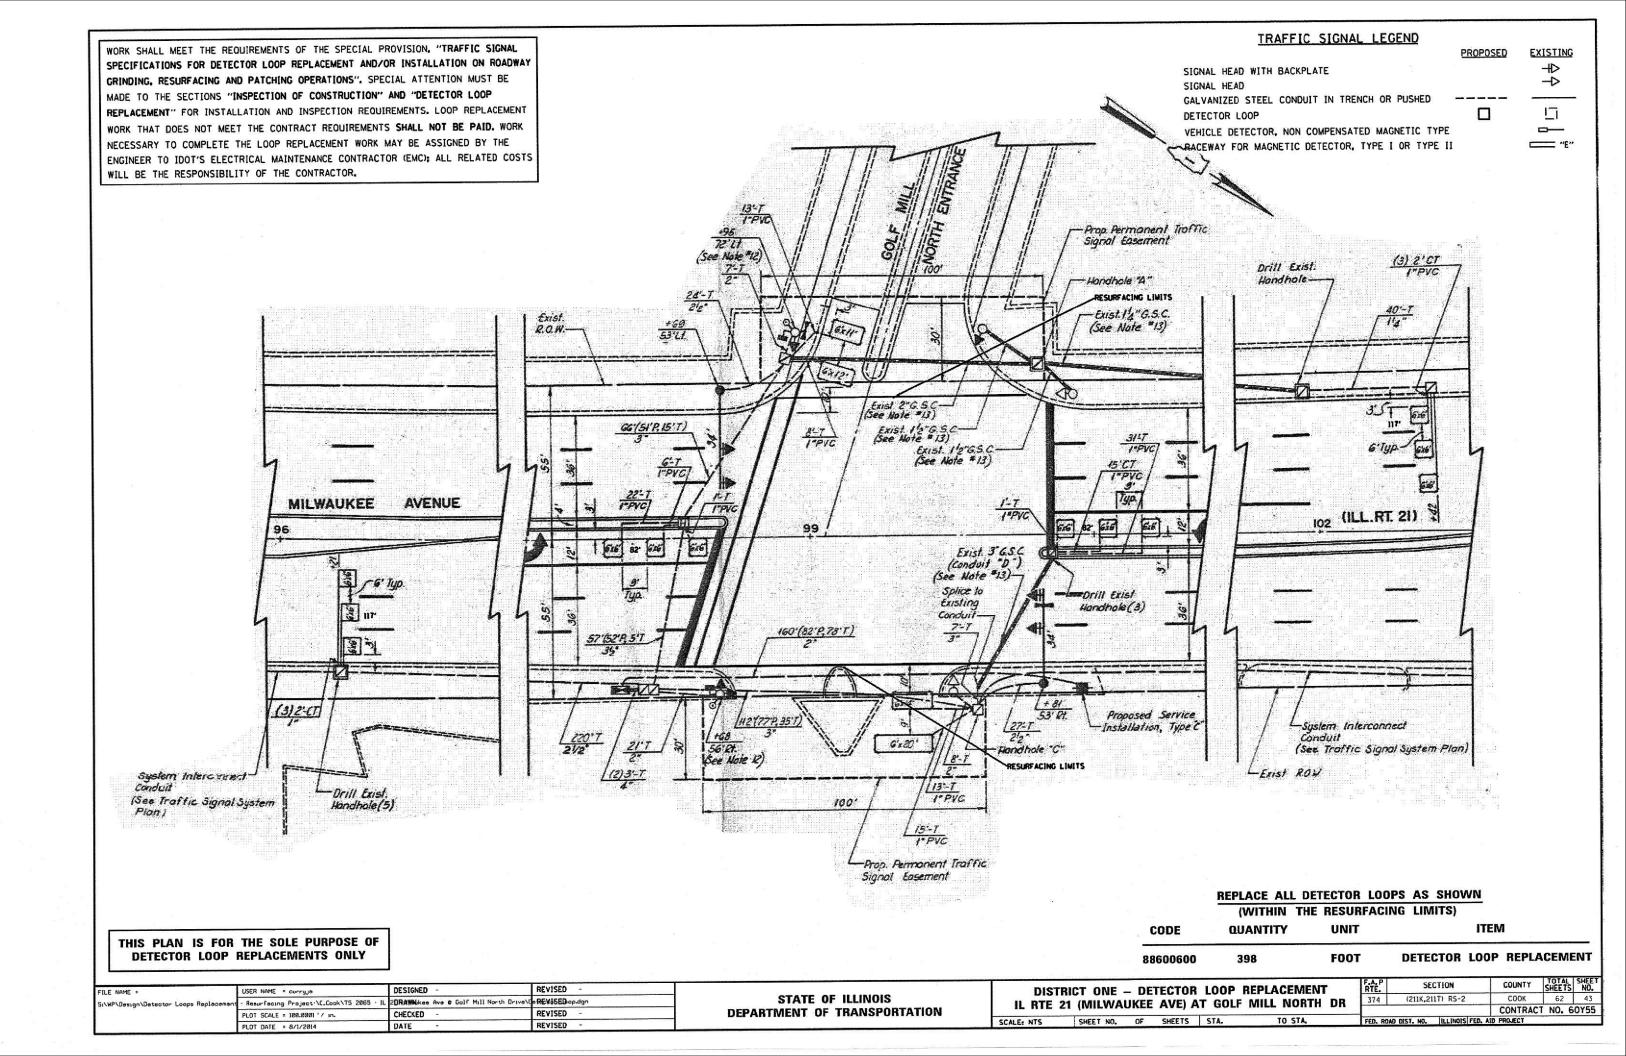

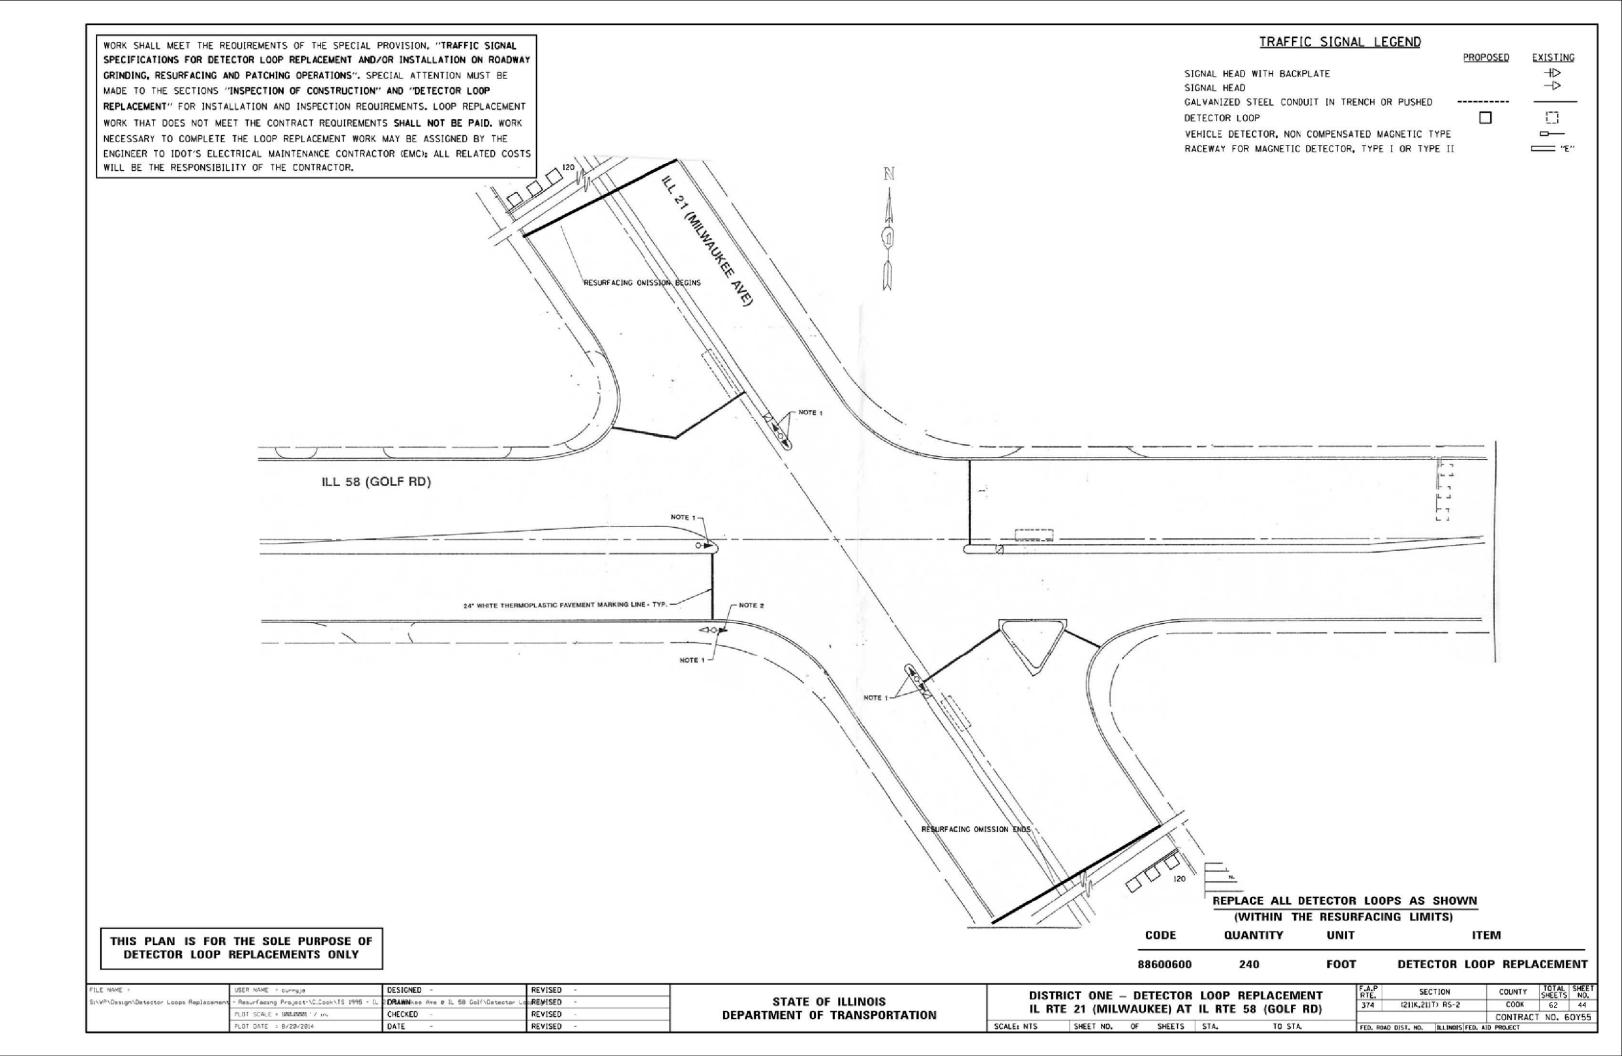

WORK SHALL MEET THE REQUIREMENTS OF THE SPECIAL PROVISION, "TRAFFIC SIGNAL SPECIFICATIONS FOR DETECTOR LOOP REPLACEMENT AND/OR INSTALLATION ON ROADWAY GRINDING, RESURFACING AND PATCHING OPERATIONS". SPECIAL ATTENTION MUST BE MADE TO THE SECTIONS "INSPECTION OF CONSTRUCTION" AND "DETECTOR LOOP REPLACEMENT" FOR INSTALLATION AND INSPECTION REQUIREMENTS. LOOP REPLACEMENT WORK THAT DOES NOT MEET THE CONTRACT REQUIREMENTS SHALL NOT BE PAID. WORK NECESSARY TO COMPLETE THE LOOP REPLACEMENT WORK MAY BE ASSIGNED BY THE ENGINEER TO IDOT'S ELECTRICAL MAINTENANCE CONTRACTOR (EMC); ALL RELATED COSTS WILL BE THE RESPONSIBILITY OF THE CONTRACTOR.

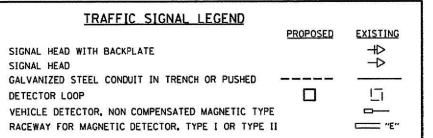

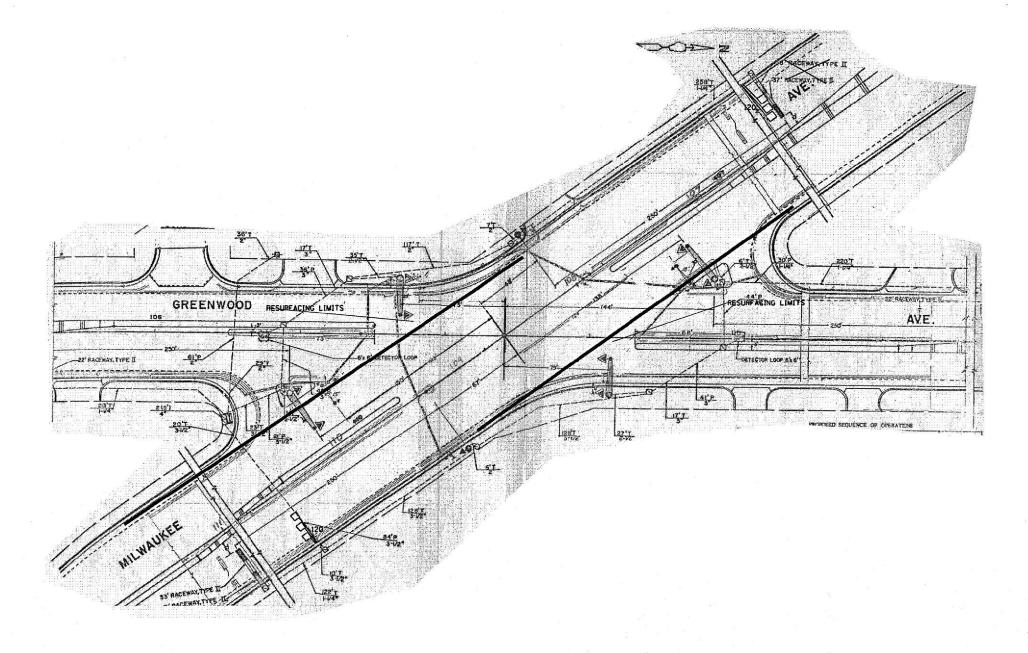


THIS PLAN IS FOR THE SOLE PURPOSE OF DETECTOR LOOP REPLACEMENTS ONLY


(WITHIN THE RESURFACING LIMITS)


CODE QUANTITY UNIT ITEM


88600600 240 FOOT DETECTOR LOOP REPLACEMENT


FILE NAME =	USER NAME = curryje	DESIGNED -	REVISED -		Diez	DICT ONE	DE	FECTOR	LOOP P	EDI ACEMENIT	F.A.P	SECTION	COUNTY	SHEETS	SHEET
5:\WP\Design\Detector Loops Replacement	- Resurfacing Project-\C_Cook\TS 2035 - IL	2DRAWNikee Ave & Oak Mill Mell\Detector	LREVISED -	STATE OF ILLINOIS	DISTRICT ONE — DETECTOR LOOP REPLACEMEN IL RTE 21 (MILWAUKEE) AT GREENWOOD AVE		*** /**** ***** ****** ****** ***		COOK	62	45				
	PLOT SCALE = 100.0001 ' / io.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION	IL.	RIE ZI (IVI	ILVVAL	JKEE) P	AI GREEN	WOOD AVE			CONTRAC	CT NO. (60Y55
8	PLOT DATE = 8/15/2014	DATE -	REVISED -		SCALE: NTS SHEET NO. OF SHEETS STA. TO STA.		FED. ROA	D DIST. NO. ILLINOIS FED.							

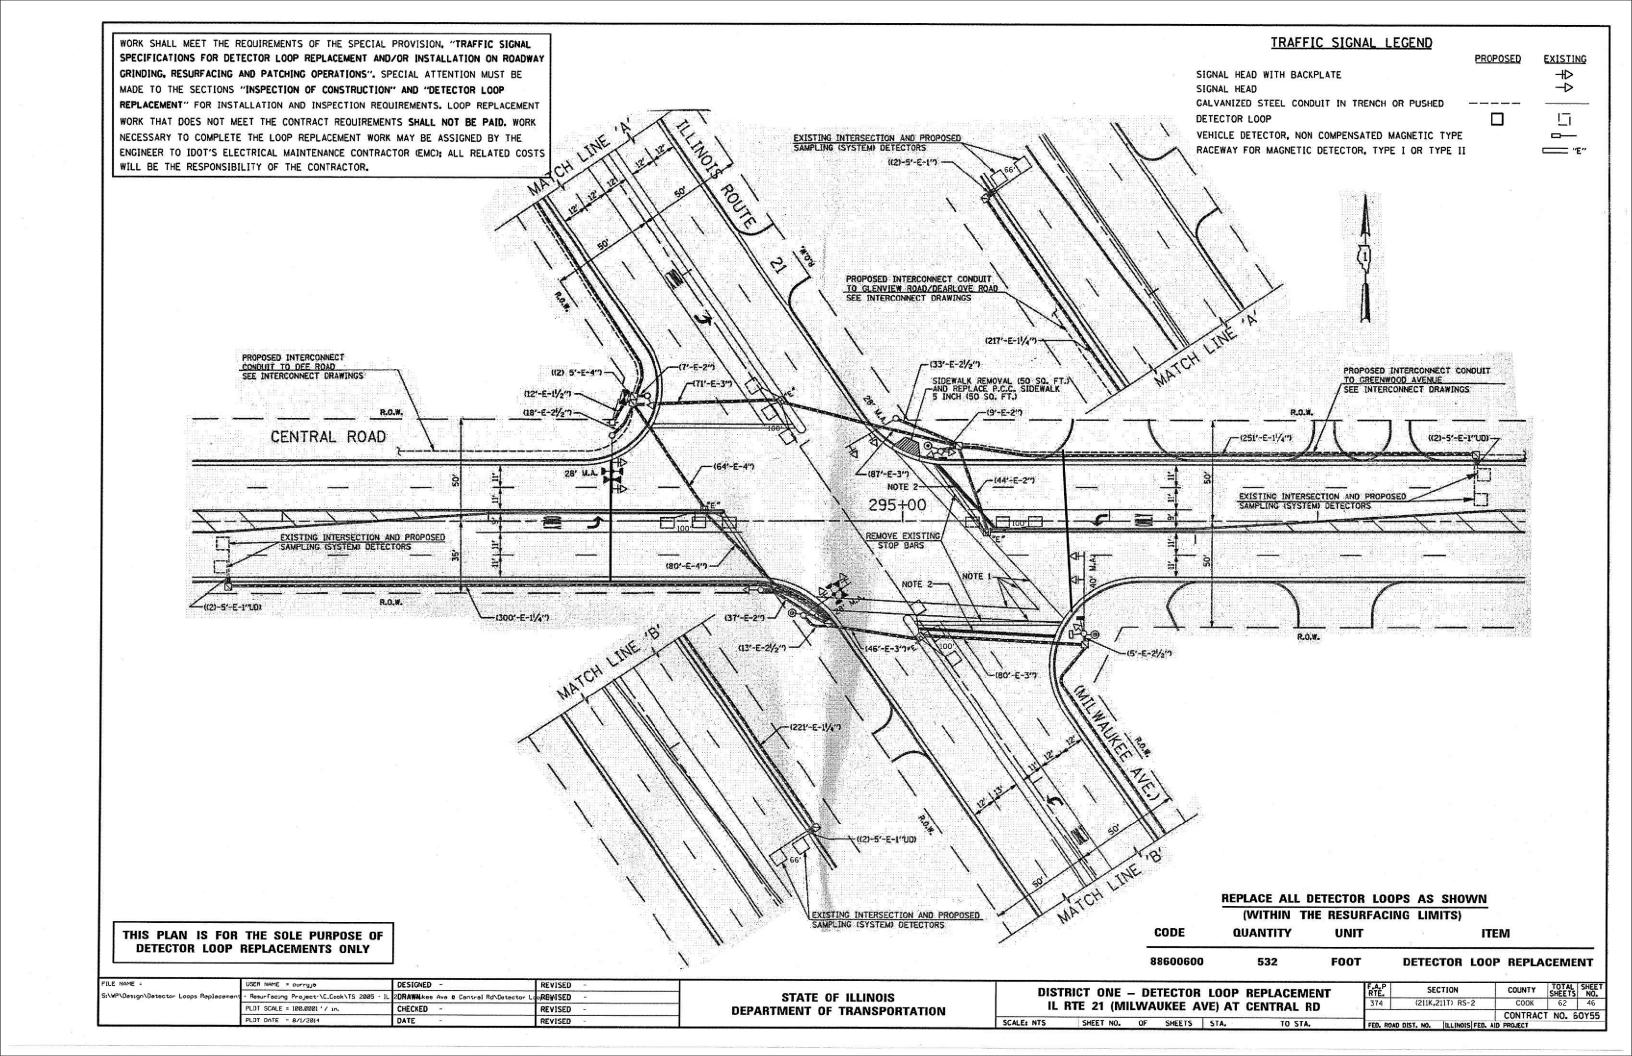


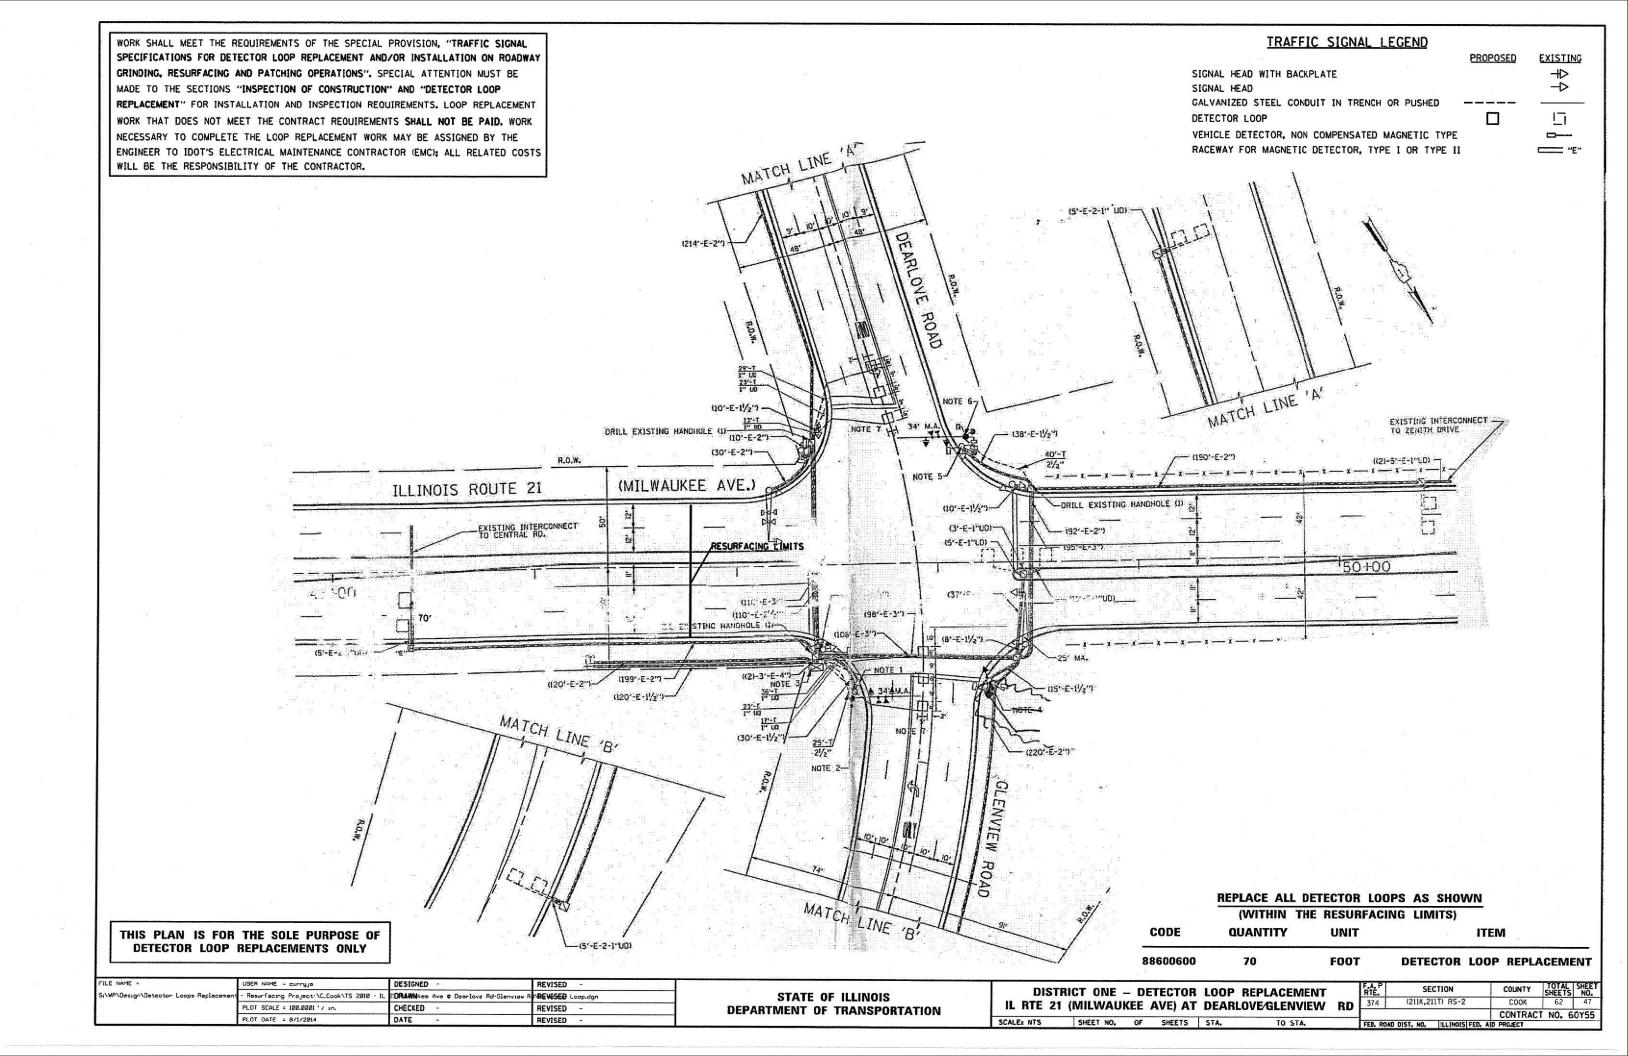


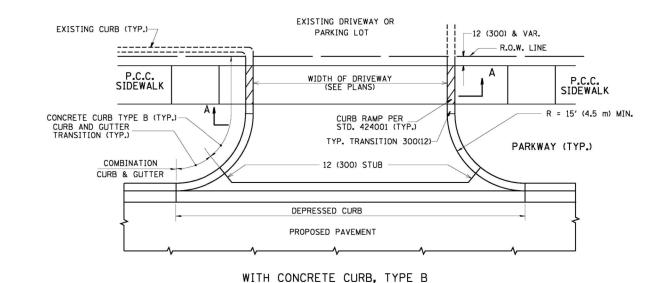

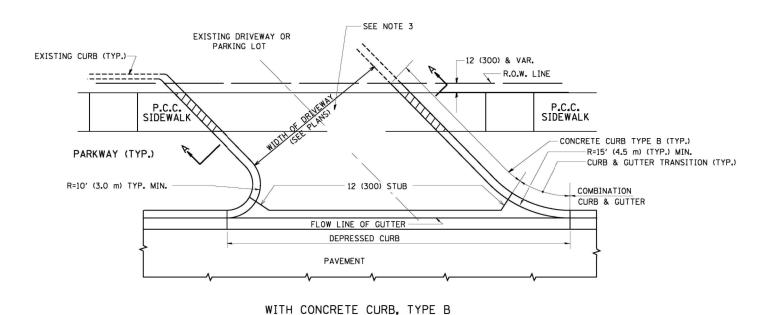

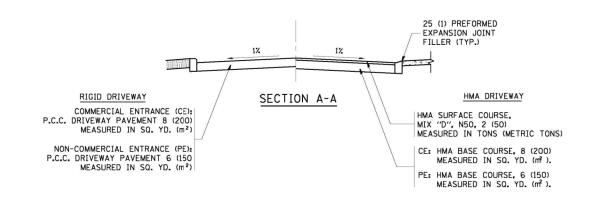

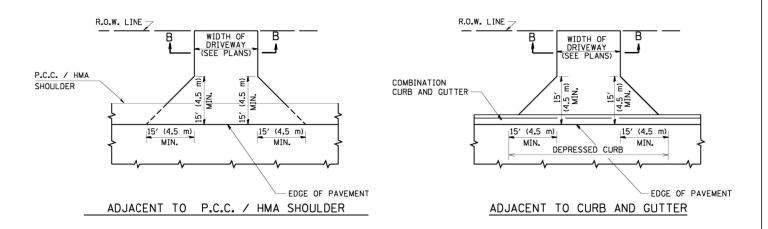

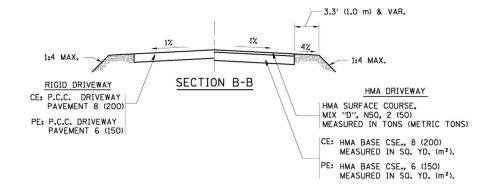

RURAL FIELD ENTRANCE (FE)

HMA SURFACE COURSE, MIX "D", N5O, 2 (50) MEASURED IN TONS (METRIC TONS)

AGGREGATE BASE CSE., TYPE B, 8 (200) MEASURED IN SQ. YD. (m^2) .

GENERAL NOTES:

DRIVEWAY SLOPES, LOCATIONS. & GEOMETRIC LAYOUT SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE "HANDBOOK FOR POLICY ON PERMITS FOR ACCESS DRIVEWAYS TO STATE HIGHWAYS". FOR FURTHER LAYOUT REQUIREMENTS, REFER TO ILLUSTRATIONS IN THE PERMIT HANDBOOK. DRIVEWAYS SHALL BE REPLACED IN KIND, UNLESS OTHERWISE NOTED ON THE PLANS.

COMMERCIAL DRIVEWAYS SHALL BE CONSTRUCTED WITH CONCRETE CURB, TYPE B RETURNS EXCEPT WHEN THE SIDEWALK EDGE IS 4 FEET (1.2 METERS) OR LESS FROM THE BACK OF CURB, CONSTRUCT A FLARE DRIVEWAY WITHOUT CURB.

THE RESIDENT ENGINEER SHALL CONTACT THE TRAFFIC PERMIT OFFICE AT 847/ 705-4131 FOR ANY QUESTIONS ON DRIVEWAYS SHOWN IN THE PLANS; SPECIFICALLY IN REFERENCE TO ADDITIONAL AND/OR RELOCATION/REMOVAL OF A DRIVEWAY.

COMBINATION CONCRETE CURB & GUTTER SHALL BE MEASURED STRAIGHT ACROSS THE DRIVEWAY. NO ADDITIONAL COMPENSATION WILL BE ALLOWED FOR THE CURB & GUTTER TRANSITION.


1 (25) PREFORMED EXPANSION JOINT FILLER WILL NOT BE PAID SEPARATELY, BUT SHALL BE CONSIDERED INCLUDED IN THE COST OF THE P.C.C. DRIVEWAY PAVEMENT OR P.C.C. SIDEWALK.


WHEN THE P.C.C. SIDEWALK EXTENDS THROUGH THE DRIVEWAY, THE THICKNESS OF THE SIDEWALK IN THE DRIVEWAY AREA SHALL BE THE SAME AS THE DRIVEWAY THICKNESS. SIDEWALK WILL BE PAID FOR AS P.C.C. SIDEWALK OF THE THICKNESS SPECIFIED. SIDEWALK CROSS SLOPE THRU DRIVEWAY AREA TO BE A MAXIMUM OF 1:50.

I	FILE NAME =	USER NAME = leysa	DESIGNED	-	R. SHAH	REVISED	-	P. LaFLUER 04-15-03
I	c:\pw_work\pwidot\leysa\d0108315\bd01.dgr		DRAWN	-		REVISED	-	R. BORO 01-01-07
I		PLOT SCALE = 50.0000 '/ in.	CHECKED	-		REVISED	-	R. BORO 06-11-08
I		PLOT DATE = 9/6/2011	DATE	-	11-04-95	REVISED	-	R. BORO 09-06-11

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

DR	IVEWAY DETAILS – DISTAN	E BETWEE	N R.O.W.	F.A.P. RTE.	SECTION	COUNTY	TOTAL	SHEET NO.
AND	FACE OF CURB & EDGE OF	SHUIII DED	> = 15' (4 E m)	374	(211K, 211T) RS-2	соок	62	48
AND	TACE OF COMB & EDGE OF	SHOOLDEN	> = 15 (4.5 III)		BD0156-07 (BD-01)	CONTRACT	NO.	60Y55
SCALE: NONE	SHEET NO. 1 OF 1 SHEETS	STA.	TO STA.	FED. R	OAD DIST. NO. 1 ILLINOIS FED. A	ID PROJECT		

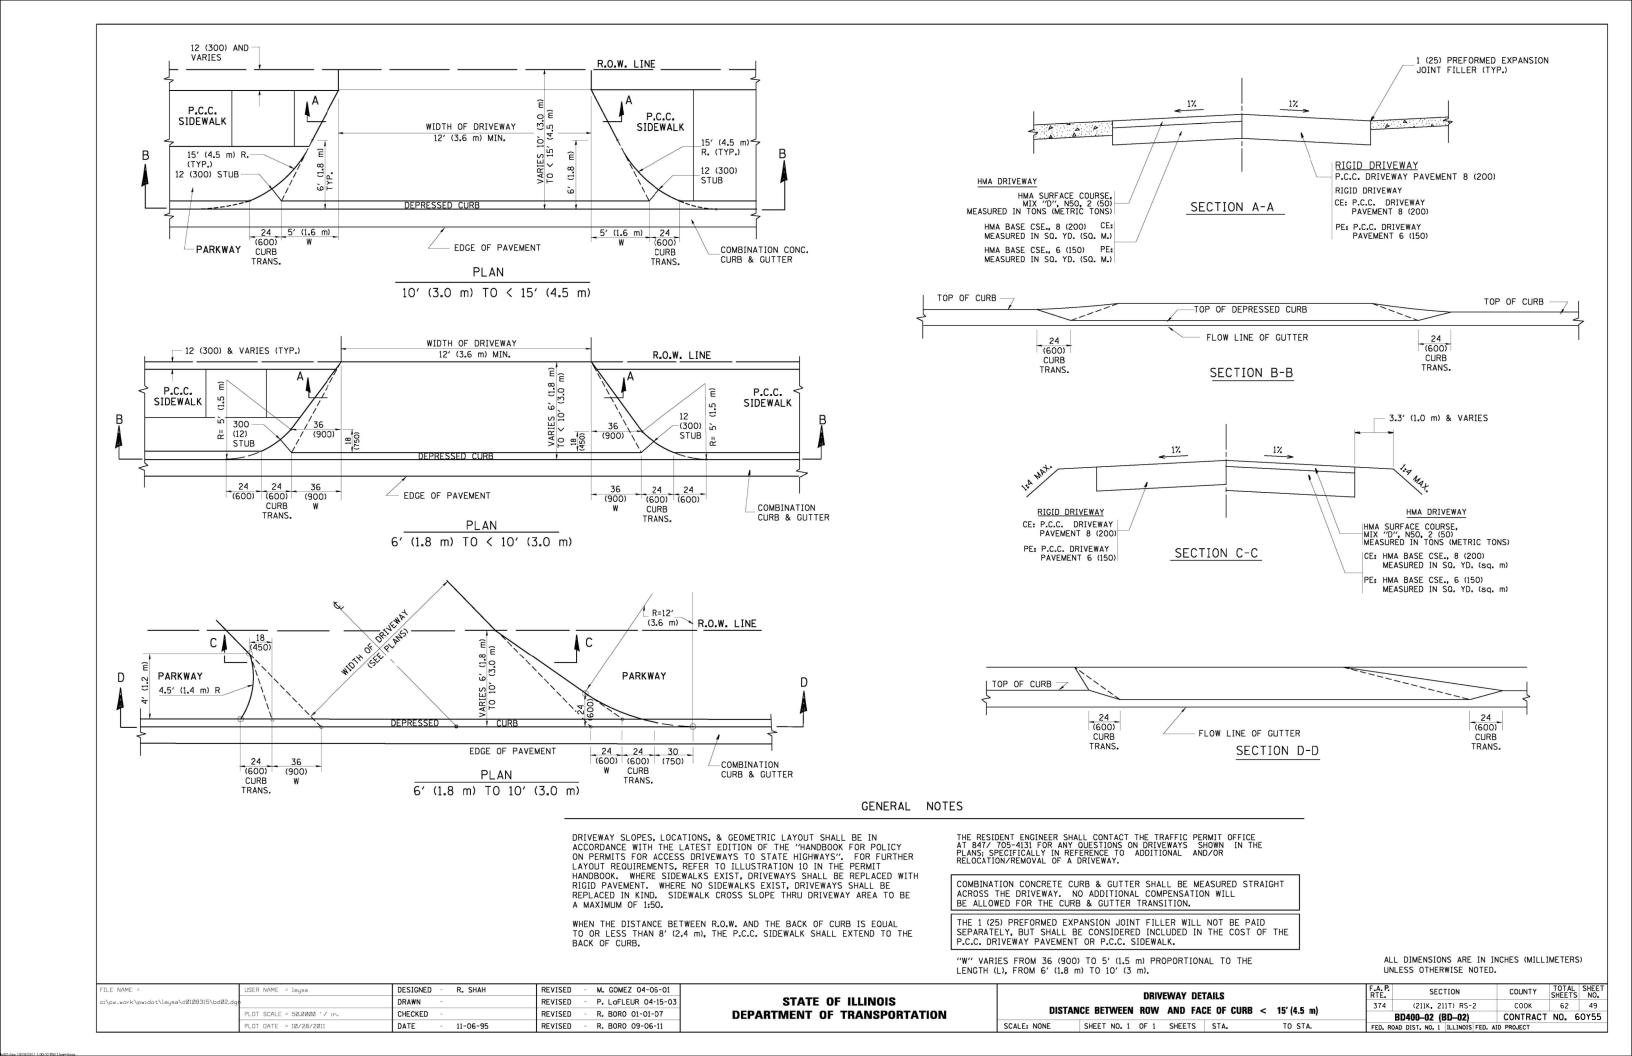

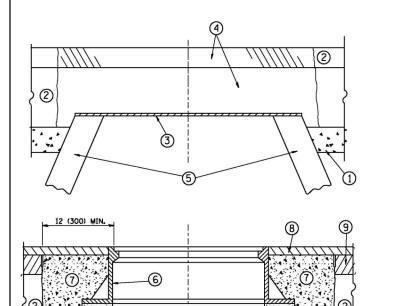

PROPOSED

PROPOSED SAND FILL

EXISTING BROKEN FRAMES AND LIDS SHALL BE REMOVED AND DISPOSED OF BY THE CONTRACTOR AND SHALL BE REPLACED AS DIRECTED BY THE ENGINEER. REPLACEMENT FRAMES AND LIDS WILL BE PAID FOR IN ACCORDANCE WITH ARTICLE 109.04 OF THE STANDARD SPECIFICATIONS UNLESS A SEPARATE PAY ITEM HAS BEEN PROVIDED.

IF THE EXISTING LIDS ARE OPEN, THE FRAME WILL BE ADJUSTED TO THE ELEVATION OF THE MILLED PAVEMENT SURFACE PRIOR TO THE MILLING OPERATION. THE FRAME WILL NOT BE REMOVED AND COVERED BY THE METAL PLATE.

CITY OF CHICAGO CASTINGS ARE THE PROPERTY OF THE CITY AND THE CONTRACTOR SHALL NOTIFY THE CITY FOR REMOVAL AND DISPOSITION OF THE CASTINGS.

THE METAL PLATE USED TO COVER THE STRUCTURE SHALL REMAIN THE PROPERTY OF THE CONTRACTOR.

WHEN STRUCTURES ARE TO BE ADJUSTED OR RECONSTRUCTED, THE LOWERING AND RAISING OF THE FRAMES AND LIDS WILL NOT BE PAID FOR SEPARATELY BUT WILL BE INCLUDED IN THE COST OF THE CORRESPONDING PAY ITEM.

SCALE: NONE

NOTES:

BRICK, MORTAR, OR CONC. ADJUSTING RINGS

CONSTRUCTION PROCEDURES

STAGE 1 (BEFORE PAVEMENT MILLING)

- A) REMOVE A MINIMUM OF 12 (300) OF THE PAVEMENT FROM AROUND THE STRUCTURE.
- B) REMOVE THE EXISTING FRAME AND LID FROM THE STRUCTURE.
- C) COVER THE STRUCTURE OPENING WITH A 36 (900) DIAMETER METAL PLATE.
- D) BACKFILL WITH CRUSHED STONE AND A MINIMUM 1½ (40) THICK HMA SURFACE MIX APPROVED BY THE ENGINEER.

STAGE 2 (AFTER PAVEMENT MILLING)

- A) REMOVE THE HMA SURFACE MIX AND CRUSHED STONE.
- B) INSTALL THE FRAME AND LID; ADJUST THE FRAME TO ITS FINAL SURFACE ELEVATION.
- C) THE SURROUNDING SPACE SHALL BE FILLED WITH CLASS SI CONCRETE, OR HMA SURRACE COURSE OR HMA BINDER COURSE TO THE ELEVATION OF THE SURFACE OF THE EXISTING BASE COURSE OR THE BINDER COURSE.

THE PROCEDURE EXPLAINED ABOVE SHALL CONFORM TO THE APPLICABLE PORTIONS OF SECTIONS 353, 406, 602, AND 603 OF THE STANDARD SPECIFICATIONS.

LEGEN

SUB-BASE GRANULAR
MATERIAL

PROPOSED SAND FILL

- 6 FRAME AND LID (SEE NOTES)
- 2 EXISTING PAVEMENT
- CLASS SI CONCRETE, HMA SURFACE COURSE OR HMA BINDER COURSE
- 3 36 (900) DIAMETER METAL PLATE
- 8 PROPOSED HMA SURFACE COURSE
- PROPOSED CRUSHED STONE AND HMA SURFACE MIX

 (5) EXISTING STRUCTURE
- PROPOSED HMA BINDER
 COURSE

LOCATION OF STRUCTURES:

THE CONTRACTOR WILL BE REQUIRED TO KEEP A RECORD OF THE LOCATIONS OF THE BURIED STRUCTURES ACCORDING TO THE STATION AND DISTANCE LEFT OR RIGHT OF THE CENTERLINE OF PAVEMENT. UPON COMPLETION OF THE WORK, THE CONTRACTOR WILL DELIVER THE RECORD TO THE ENGINEER.

BASIS OF PAYMENT: THIS WORK WILL BE PAID FOR AT
THE CONTRACT UNIT PRICE PER EACH FOR
"FRAMES AND LIDS TO BE ADJUSTED, SPECIAL"

NEW FRAMES AND LIDS, WHEN SPECIFIED, WILL BE PAID FOR SEPARATELY.


DETAILS FOR FRAMES AND LIDS ADJUSTMENT WITH MILLING

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN

FILE NAME = Geglienobt DESIGNED - R. SHAH REVISED - R. SHAH 03-10-95
Wi\distatd\22x34\bd08.dgn

| DRAWN - REVISED - A. ABBAS 03-21-97
| PLOT SCALE = 50.0000 '/ IN. CHECKED - REVISED - R. WIEDEMAN 05-14-04
| PLOT DATE = 1/4/2008 | DATE - 10-25-94 | REVISED - R. BORO 01-01-07

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

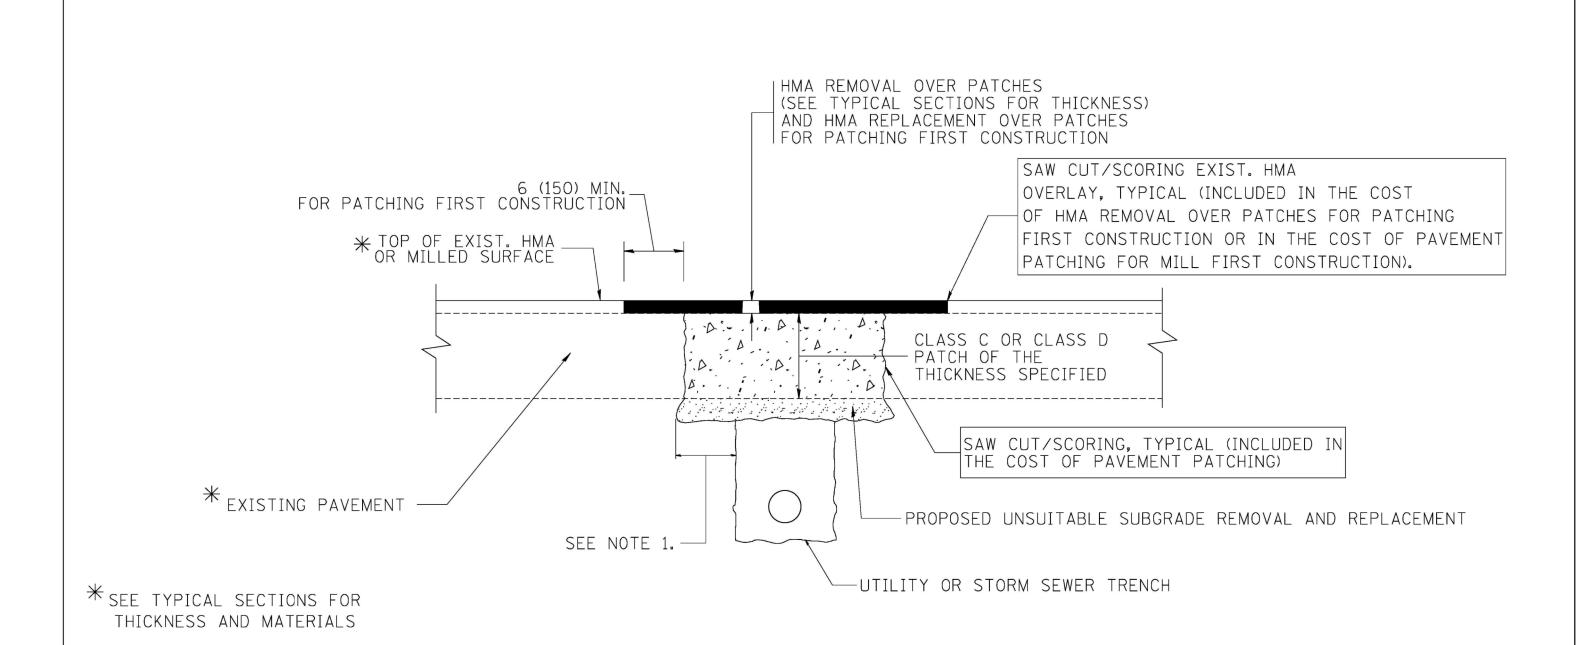

NOTES:

- 1. THE WIDTH OF THE FULL DEPTH PATCH OVER A TRENCH SHALL BE 12 (300) WIDER ON EACH SIDE OF THE TRENCH.
- 2. FOR METHOD OF MEASUREMENT AND BASIS OF PAYMENT, SEE RECURRING SPECIAL PROVISION "PATCHING WITH HOT-MIX ASPHALT OVERLAY REMOVAL".


SEQUENCE OF CONSTRUCTION (PATCHING FIRST)

- 1. REMOVE THE EXISTING HMA MATERIAL OVER THE AREA TO BE PATCHED.
- 2. REMOVE AND REPLACE WITH CLASS C OR D PATCH.
- 3. REPLACE HMA MATERIAL OVER THE AREA TO BE PATCHED.

SEQUENCE OF CONSTRUCTION (MILLING FIRST)


- 1. MILL HMA FIRST IF THERE IS AT LEAST 41/2 INCHES OR MORE OF HMA MATERIAL ON TOP OF THE EXISTING PAVEMENT OR IF THE PAVEMENT IS FULL DEPTH HMA. A MINIMUM OF 2 INCHES OF HMA MATERIAL SHALL BE IN PLACE AFTER MILLING.
- 2. REMOVE AND REPLACE WITH FULL DEPTH CLASS D PATCHES TO TOP OF MILLED SURFACE.

		USER NAME = bauerdl	DESIGNED - R. SHAH	REVISED -	A. ABBAS 04-27-98			PAVEMENT PATCHING FOR		RTE.	SECTION	COUNTY	SHEETS	NO.
0	c:\projects\diststd22x34\bd22.dgn		DRAWN -	REVISED -	R. BORO 01-01-07	STATE OF ILLINOIS				374	(211K, 211T) RS-2	соок	62	51
		PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED -	R. BORO 09-04-07	DEPARTMENT OF TRANSPORTATION		HMA SURFACED PAVEMENT			BD400-04 (BD-22)	CONTRACT	T NO. 60	OY55
L		PLOT DATE = 10/27/2008	DATE - 10-25-94	REVISED -	K. ENG 10-27-08	S	SCALE: NONE	SHEET NO. 1 OF 1 SHEETS STA.	TO STA.	FED. RO	DAD DIST. NO. 1 ILLINOIS FED. A			

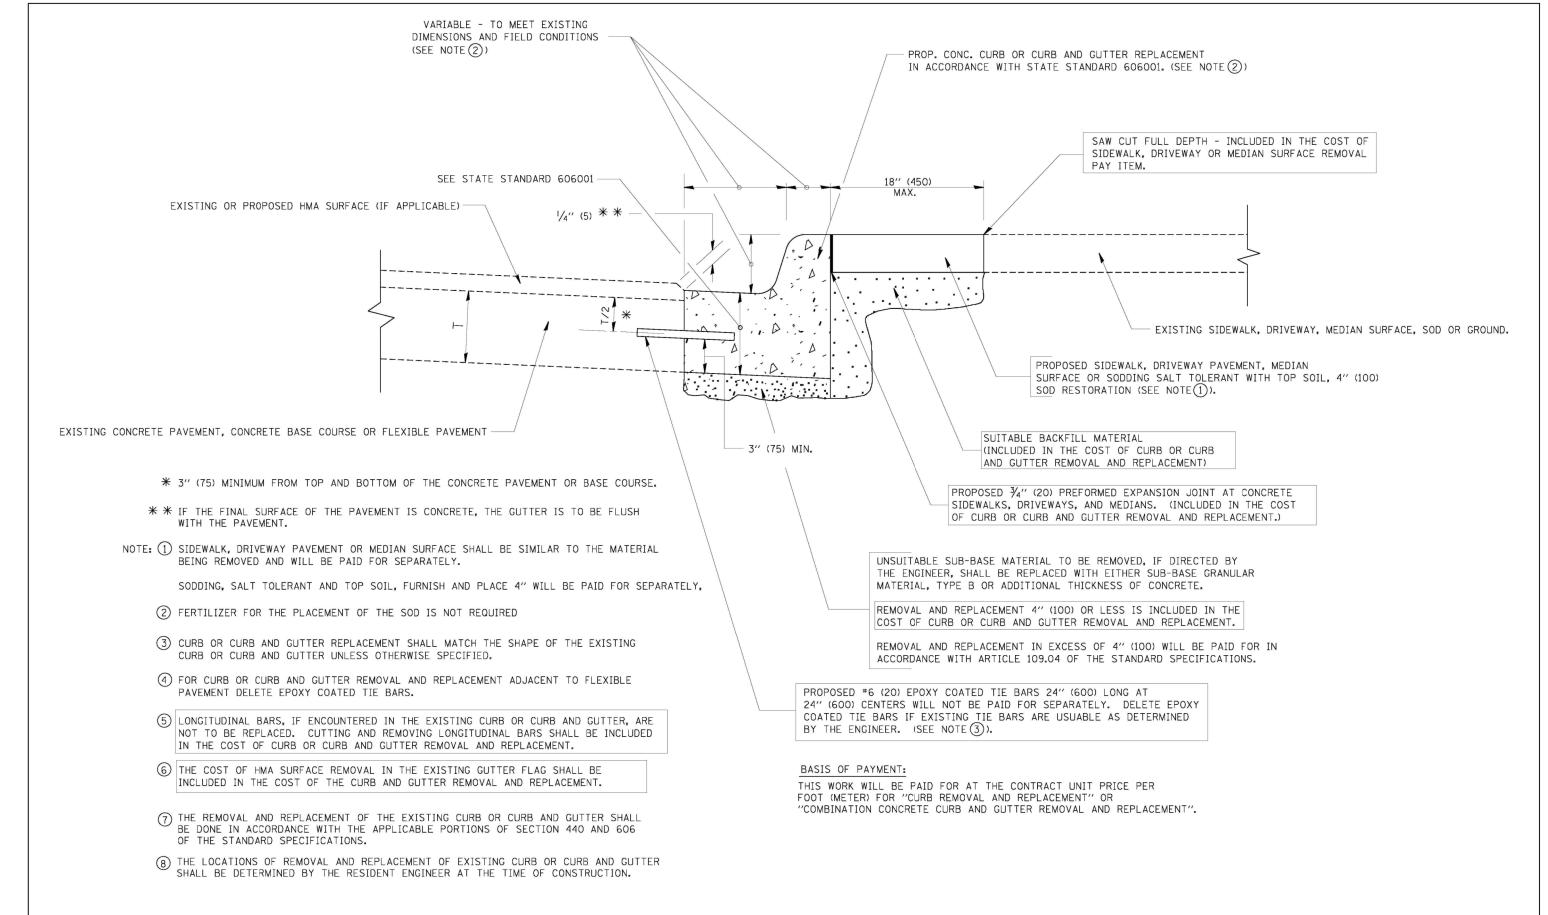


CURB OR CURB AND GUTTER REMOVAL AND REPLACEMENT


FILE NAME =	USER NAME = drivakosgn	DESIGNED - A. HOUSEH	REVISED -	R. SHAH 10-03-96			CURB OR CURB AND GUTTER	F.A.	P. SECTION	COUNTY	TOTAL SHE	EET!
c:\pw_work\pwidot\drivakosgn\d0108315\bd	24.dgn	DRAWN -	REVISED -	A. ABBAS 03-21-97	STATE OF ILLINOIS			374	(211K, 211T) RS-2	СООК	62 5	52
	PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED -	M. GOMEZ 01-22-01	DEPARTMENT OF TRANSPORTATION		REMOVAL AND REPLACEMENT		BD600-06 (BD-24)	CONTRAC	T NO. 60Y	55
	PLOT DATE = 12/15/2009	DATE - 03-11-94	REVISED -	R. BORO 12-15-09		SCALE: NONE	SHEET NO. 1 OF 1 SHEETS STA. TO STA.	FED.		AID PROJECT		

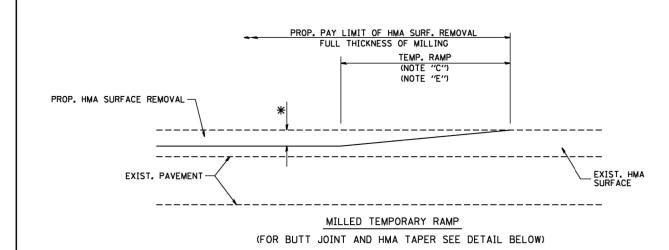

OPTION 1

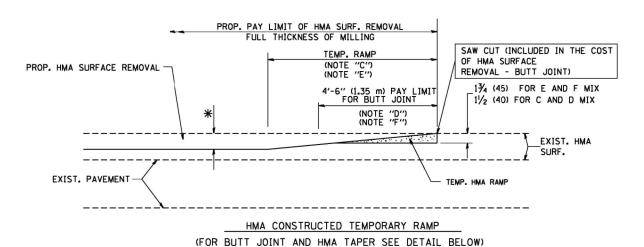

OPTION 2 TYPICAL TEMPORARY RAMP

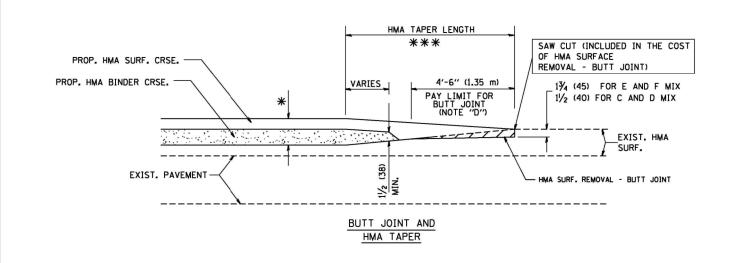



TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING

FILE NAME = Geglienobt DESIGNED - M. DE YONG REVISED - R. SHAH 10-25-94
Wi\distatd\22x34\bd32.dgn

| DRAWN - REVISED - A. ABBAS 03-21-97
| PLOT SCALE = 50.0000 '/ IN. CHECKED - REVISED - M. GOMEZ 04-06-01
| PLOT DATE = 1/4/2008 DATE - 06-13-90 REVISED - R. BORO 01-01-07

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

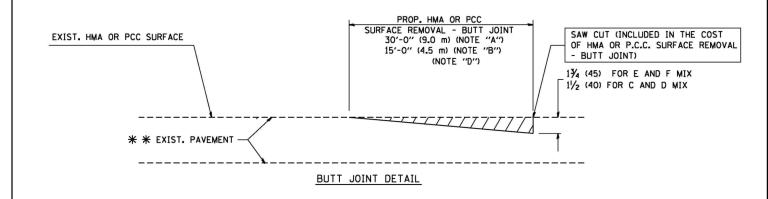

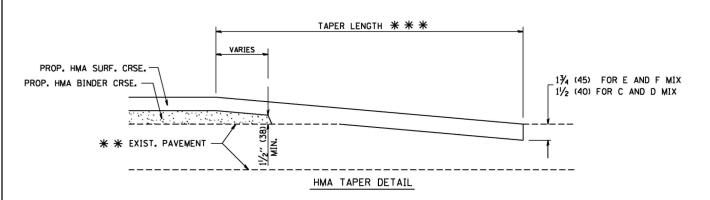

TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY


* * PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP. RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL BUTT JOINT
- G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- * SEE TYPICAL SECTIONS FOR MILLING THICKNESS.
- ** * 20'-0" (6.1 m) PER 1 (25) RESURFACING (NOTE "A") 10'-0" (3.0 m) PER 1 (25) RESURFACING (NOTE "B")

BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD (SQUARE METER)
FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT JOINT".

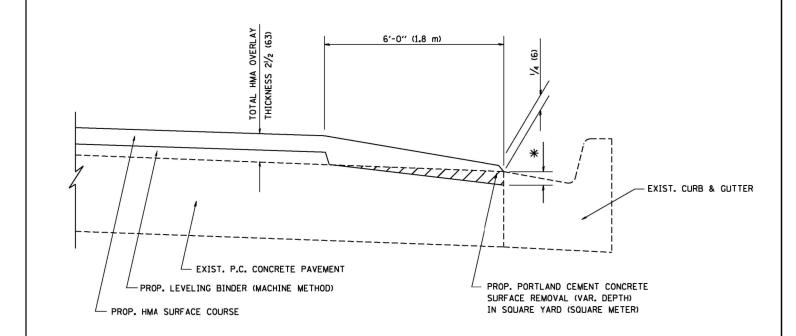


HMA TAPER AT EDGE OF P.C.C PAVEMENT

HMA SURFACE		LEVELING BINDER	
MIX	THICKNESS	THICKNESS	₩ MILLING AT GUTTER FLAG
C OR D	11/2 (38)	1 (25)	11/4 (33)
F	1¾ (44)	¾ (19)	11/2 (38)

FILE NAME =	USER NAME = gaglianobt	DESIGNED	-	R. SHAH	REVISED	-	R. SHAH 10-25-94
W:\diststd\22x34\bd33.dgn		DRAWN	-	JIS	REVISED	-	A. ABBAS 05-05-99
	PLOT SCALE = 50.00000 ' / IN.	CHECKED	-	A. ABBAS	REVISED	-	E. GOMEZ 12-21-00
	PLOT DATE = 1/4/2008	DATE	-	09-10-94	REVISED	-	R. BORO 01-01-07

STATE OF	F ILLINOIS
DEPARTMENT OF	TRANSPORTATION

HMA TAPER AT	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
EDGE OF P.C.C. PAVEMENT	374	(211K, 211T) RS-2	соок	62	54
EDUE OF F.G.G. FAVEMENT	BE	0400-06 (BD33)	CONTRACT	NO. 6	0Y55
SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.	FFD. RO	AD DIST, NO. 1 ILLINOIS FED. AL	D PROJECT		

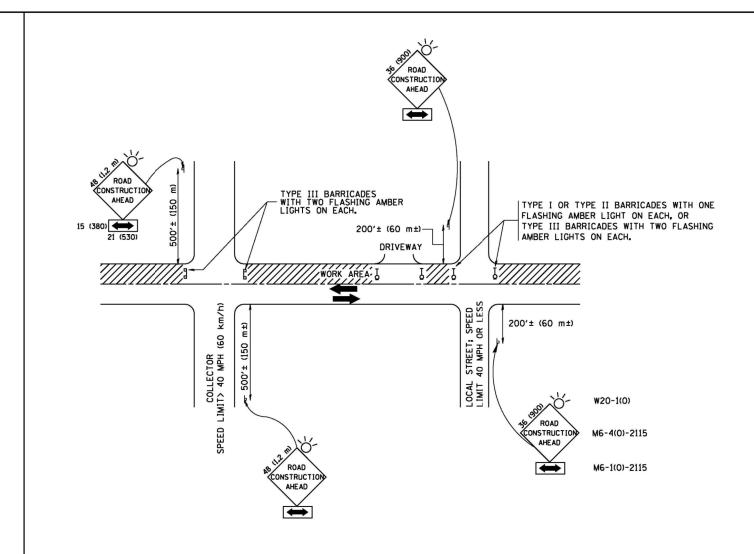

TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS

NOTES:

- A. FOR NO LANE RESTRICTION ON THE SIDE ROAD OR DRIVEWAYS
- SIDE ROAD WITH A SPEED LIMIT OF 40 MPH (60 km/h) OR LESS AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER:
- Q) ONE ROAD CONSTRUCTION AHEAD SIGN 36 x 36 (900x900) WITH A FLASHER AND FLAG MOUNTED ON IT APPROXIMATELY 200' (60 m) IN ADVANCE OF THE MAIN ROUTE.
- b) the closed portion of the main route shall be protected by blocking with type 1, type 11 or type 111 barricades, 1/3 of the cross section of the closed portion.
- 2. SIDE ROAD WITH A SPEED LIMIT GREATER THAN 40 MPH (60 km/h) AS SHOWN ON THE DRAWING AND AS DIRECTED BY THE ENGINEER:
- d) ONE ROAD CONSTRUCTION AHEAD SIGN 48 x 48 (1.2 m x 1.2 m) WITH A FLASHER MOUNTED ON IT APPROXIMATELY 500' (150 m) IN ADVANCE OF THE MAIN ROUTE.
- b) THE CLOSED PORTION OF THE MAIN ROUTE SHALL BE PROTECTED BY BLOCKING WITH TYPE III BARRICADES, 1/2 OF THE CROSS SECTION OF THE CLOSED PORTION.
- 3. WHEN THE SIDE ROAD LIES BETWEEN THE BEGINNING OF THE MAINLINE SIGNING AND THE WORK ZONE, A SINGLE HEADED ARROW (MG-1) SHALL BE USED IN LIEU OF THE DOUBLE HEADED ARROW (MG-4).

SCALE: NONE

B. FOR A LANE CLOSURE ON A SIDE ROAD OR DRIVEWAY:

USE APPLICABLE PORTIONS OF THE TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES (STD. 701501, STD. 701606 OR THE APPROPRIATE STANDARD). THE SPACING OF SIGNS AND BARRICADES SHALL BE ADJUSTED FOR FIELD CONDITIONS AS DIRECTED BY THE ENGINEER. THE DIRECTIONAL ARROW SHALL BE COVERED OR REMOVED WHEN NO LONGER CONSISTENT WITH THE SIDE ROAD LANE CLOSURE.


- C. ADVANCE WARNING SIGNS ARE TO BE OMITTED ON DRIVEWAY UNLESS OTHERWISE NOTED.
- D. THE TRAFFIC CONTROL AND PROTECTION FOR SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS SHALL BE INCIDENTAL TO THE COST OF SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.

All dimensions are in millimeters (inches) unless otherwise shown.

FILE NAME =	USER NAME = gaglianobt	DESIGNED - LHA	REVISED - J. OBERLE 10-18-95
W:\diststd\22x34\to10.dgn		DRAWN -	REVISED - A. HOUSEH 03-06-96
	PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED - A. HOUSEH 10-15-96
	PLOT DATE = 1/4/2008	DATE - 06-89	REVISED -T. RAMMACHER 01-06-00


STATI	E OF	: ILLINOIS
DEPARTMENT	0F	TRANSPORTATION


	TRAFFIC CONTROL AND PROTECTION FOR			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
	SIDE ROADS, INTERSECTIONS, AND DRIVEWAYS				374	(211K, 211T) RS-2	COOK	62	55
						TC-10	CONTRACT	NO.	50Y55
SHEET NO. 1 OF 1 SHEETS STA. TO STA.			FED. RO	DAD DIST. NO. 1 ILLINOIS FED. AI	D PROJECT				

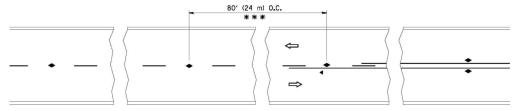


*** REDUCE TO 40' (12 m) O.C. ON CURVES WITH POSTED OR ADVISORY SPEED 45 M.P.H. (70 km/h) OR LESS.


TWO-LANE/TWO-WAY

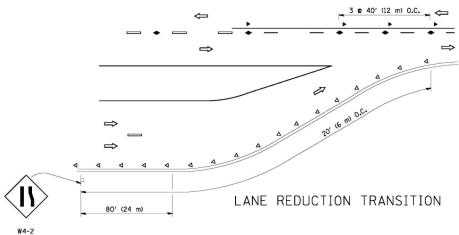

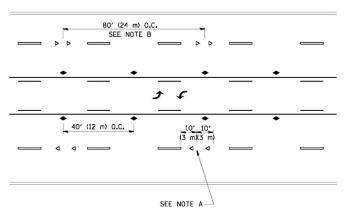

TWO-WAY LEFT TURN

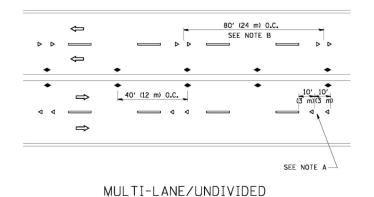

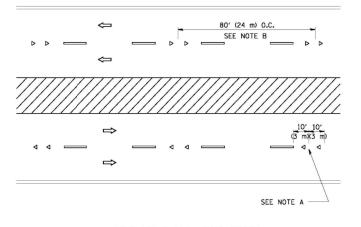

MULTI-LANE/DIVIDED

GENERAL NOTES

- MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- 3. MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES

- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.
- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.

SYMBOLS

- ---- YELLOW STRIPE
- WHITE STRIP
- ONE-WAY AMBER MARKER
- ONE-WAY CRYSTAL MARKER (₩/O)
- ◆ TWO-WAY AMBER MARKER

DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- 2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE
- 3. THE EXACT MARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.


SEE TWO-LANE/TWO-WAY WHERE MARKERS CONTINUE ** WHERE THE MEDIAN WIDTH IS 6' (2 m) OR LESS ** Se 80' (24 m) O.C. ** SEE TWO-WAY MARKERS. ** SEE TWO-WAY MARKERS. ** SEE TWO-WAY MARKERS. ** SEE TWO-WAY MARKERS. ** SEE TWO-WAY MARKERS.


LEFT TURN


All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = drivakosgn	DESIGNED -	REVISED	T. RAMMACHER 09-19-94			TYPICAL APPLICATIONS	RTF.	SECTION	COUNTY	SHEETS NO.
c:\pw_work\pwidot\drivakosgn\d0108315\to	1.dgn	DRAWN -	REVISED	T. RAMMACHER 03-12-99	STATE OF ILLINOIS			. 374	(211K, 211T) RS-2	соок	62 56
	PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED	T. RAMMACHER 01-06-00	DEPARTMENT OF TRANSPORTATION	RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT))	TC-11	CONTRAC	T NO. 60Y55
	PLOT DATE = 9/9/2009	DATE	REVISED	- C. JUCIUS 09-09-09		SCALE: NONE	SHEET NO. 1 OF 1 SHEETS STA. TO STA.	FED.		AID PROJECT	


374 (211K, 211T) RS-2 COOK 62 57 60Y55

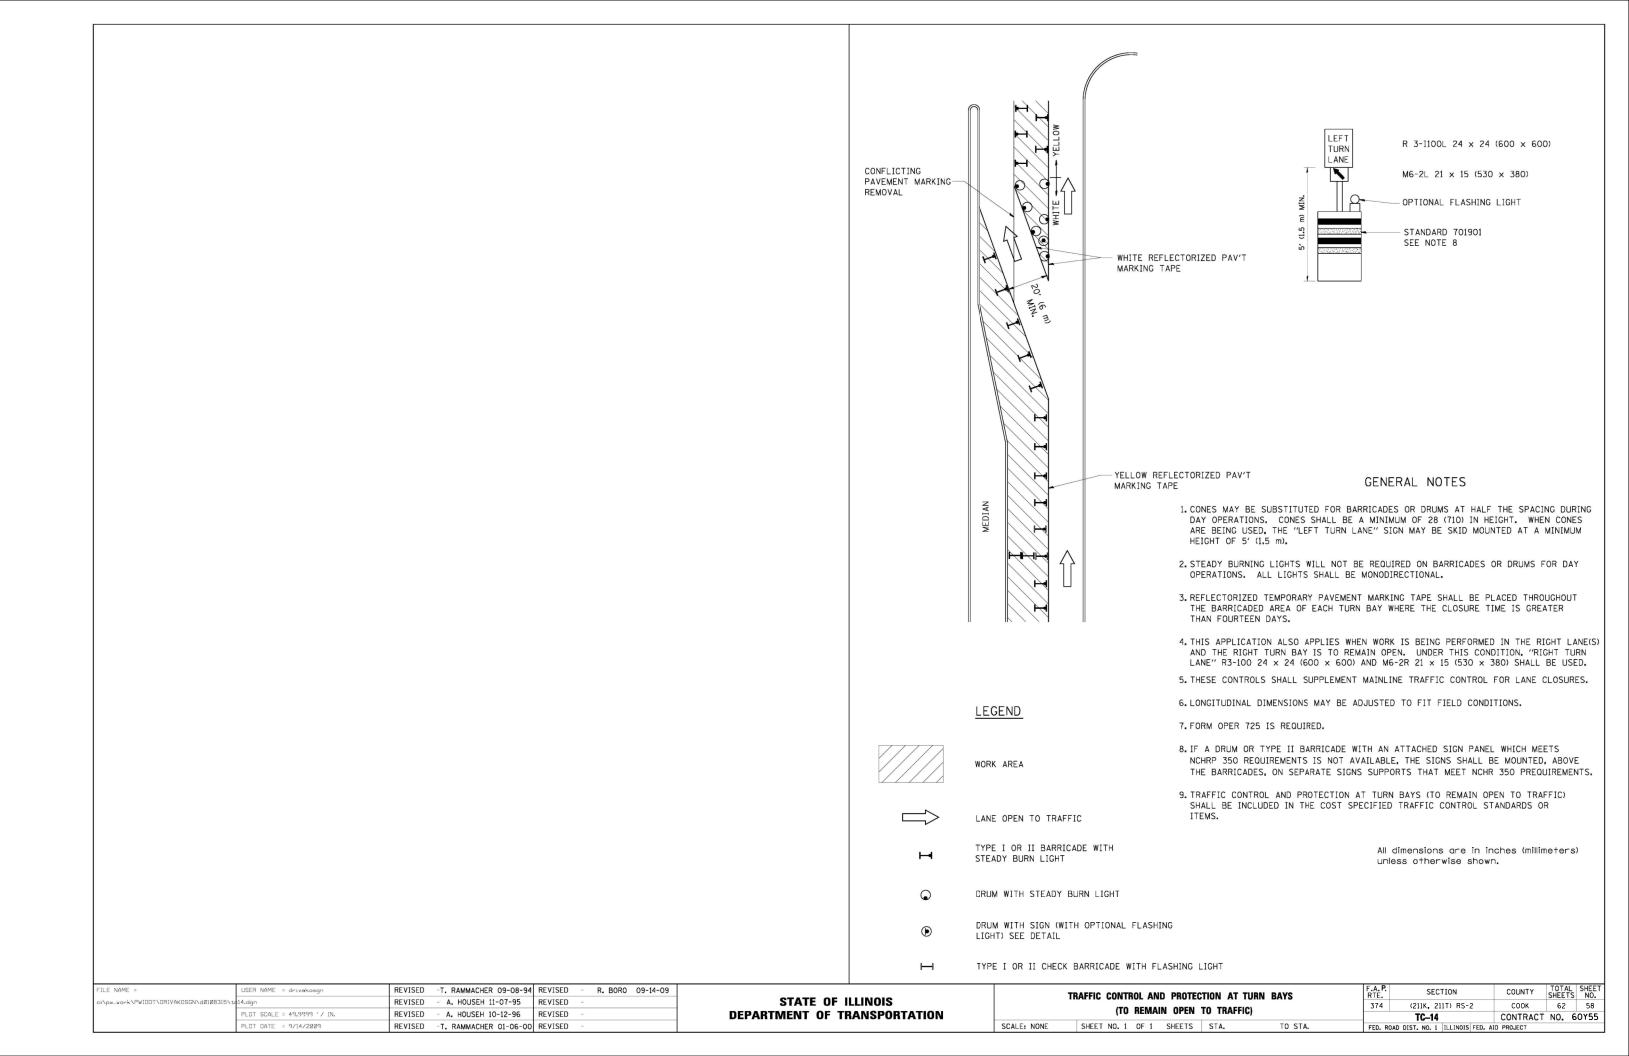

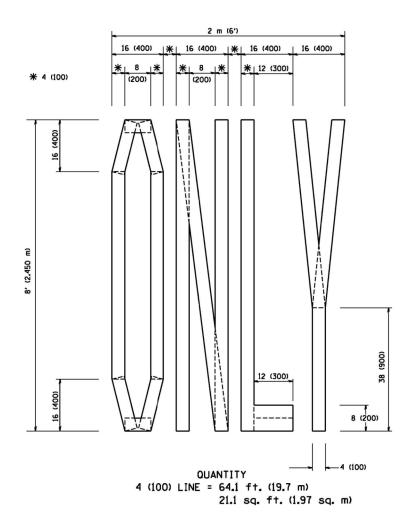

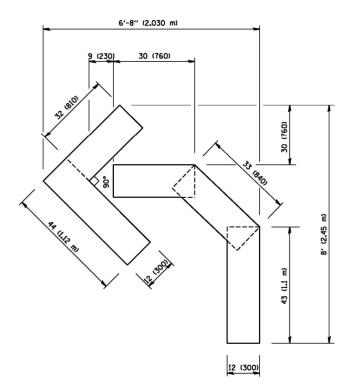

OUANTITY 4 (100) LINE = 45.5 ft. (13.9 m) 15.2 sq. ft. (1.39 sq. m)

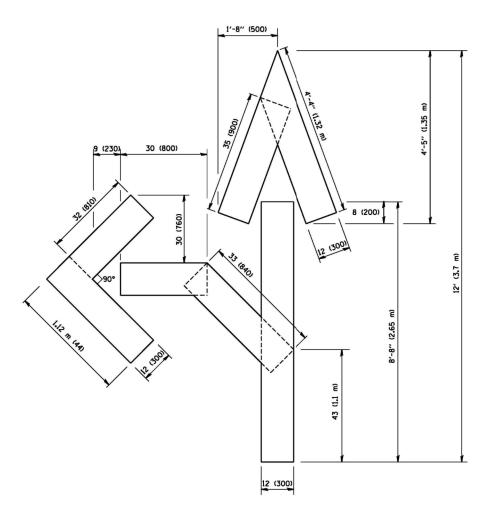

QUANTITY 4 (100) LINE = 82.5 ft. (25.3 m) 27.5 sq. ft. (2.53 sq. m)


All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =	USER NAME = gaglianobt	DESIGNED -	REVISED -T. RAMMACHER 06-05-96
W:\diststd\22x34\tc16.dgn		DRAWN -	REVISED -T. RAMMACHER 11-04-97
	PLOT SCALE = 50.00000 '/ IN.	CHECKED -	REVISED -T. RAMMACHER 03-02-98
	PLOT DATE = 1/4/2008	DATE - 09-18-94	REVISED - E. GOMEZ 08-28-00

FILE NAME =

STATE	OF ILLINOIS	
DEPARTMENT (OF TRANSPORTATION	

	PAVEMENT MARKING LETTERS AND SYMBOLS				RTE.	SECTION	COUNTY	SHEETS	NO.	
	FOR TRAFFIC STAGING					374	(211K, 211T) RS-2	COOK	62	59
							TC-16	CONTRACT	NO. 6	0Y55
SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA. FED. ROAD DIST, NO. 1 ILLINOIS FED. AID PROJECT										

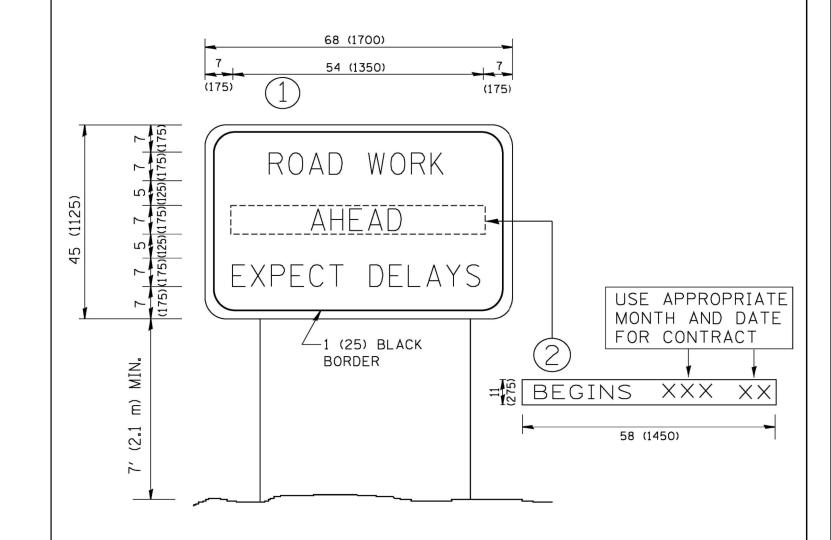

NOTES:

- 1. USE BLACK LETTERING ON ORANGE BACKGROUND.
- 2. ERECT SIGNS IN ADVANCE OF THE LOCATION FOR THE "ROAD CONSTRUCTION AHEAD" SIGN AT LOCATIONS AS DIRECTED BY THE ENGINEER.
- 3. ERECT SIGN () WITH INSTALLED PANEL (2) ONE WEEK PRIOR TO THE START OF CONSTRUCTION.
- 4. REMOVE PANEL (2) SOON AFTER THE START OF CONSTRUCTION.
- 5. SEE SPECIAL PROVISION FOR "TEMPORARY INFORMATION SIGNING" FOR ADDITIONAL INFORMATION.
- 6. ONE SIGN ASSEMBLY EQUALS 25.70 SQ. FT. (2.3 SQ. M.)
- 7. SHALL BE PAID FOR AS TEMPORARY INFORMATION SIGNING.

	USER NAME = gagl:anobt	DESIGNED -	REVISED - R. MIRS 09-15-97			ARTERIAL ROAD		F.A.P.	SECTION	COUNTY	TOTAL SH SHEETS N
W:\d:ststd\22x34\to22.dgn		DRAWN -	REVISED - R. MIRS 12-11-97	STATE OF ILLINOIS		INFORMATION SIGN		374	(211K, 211T) RS-2	соок	62 f
	PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED -T. RAMMACHER 02-02-99	DEPARTMENT OF TRANSPORTATION		INFORMATION SIGN			TC-22	CONTRACT	T NO. 60Y
	PLOT DATE = 1/4/2008	DATE -	REVISED - C. JUCIUS 01-31-07		SCALE: NONE	SHEET NO. 1 OF 1 SHEETS STA.	TO STA.	FED. RO	DAD DIST. NO. 1 ILLINOIS FED. A	ID PROJECT	



3.0" RADIUS, 0.5" BORDER, WHITE ON GREEN; REFLECTORIZED "DRIVEWAY" D; "ENTRANCE" D; STANDARD ARROW CUSTOM 12.0" x 5.0"


NOTES:

- 1. HALF OF THE SIGNS WILL REQUIRE A LEFT HAND FACING ARROW.
- 2. TWO SIGNS SHALL BE USED AT EACH COMMERCIAL ENTRANCE PLACED BACK-TO-BACK: ONE WITH A RIGHT HAND ARROW (SHOWN) SHALL BE PLACED ON THE NEAR RIGHT SIDE THE DRIVEWAY AND ONE WITH A LEFT HAND ARROW SHALL BE PLACED ON THE FAR LEFT SIDE OF THE DRIVEWAY.
- 3. SIGNS TO BE PAID FOR AS ITEM "TEMPORARY INFORMATION SIGNING".

FILE NAME =	USER NAME = gaglianobt	DESIGNED -	REVISED - C. JUCIUS 02-15-07
W:\diststd\22x34\tc26.dgn		DRAWN -	REVISED -
	PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED -
	PLOT DATE = 1/4/2008	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

1	DRIVEWAY ENTRANCE SIGNING					F.A. P. RTE.	SEC.	TION	COUNTY	TOTAL SHEETS	SHEET NO.
ı						374	(211K, 21	1T) RS-2	COOK	62	61
I							TC-26	7	CONTRACT	NO. 6	50Y55
	SCALE: NONE	SHEET NO. 1 OF 1	SHEETS	STA.	TO STA.	FED. RO	AD DIST. NO. 1	ILLINOIS FED. AI	D PROJECT		

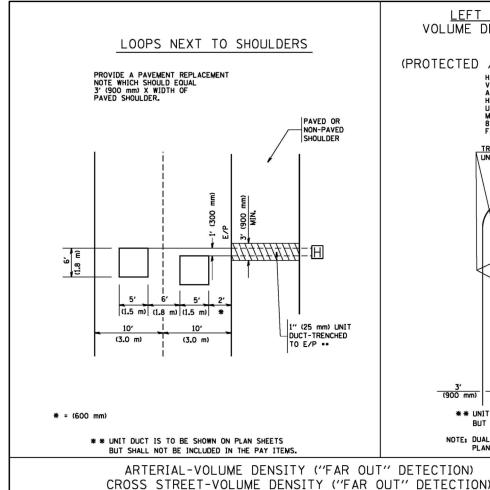

LEFT TURN LANES WITH MEDIANS VOLUME DENSITY ("FAR OUT" DETECTION) ON SAME APPROACH (PROTECTED / PERMITTED LEFT TURN PHASING) HANDHOLE LOCATION MAY VARY DEPENDING ON GEOMETRICS AND DESIGN OF TRAFFIC SIGNALS. HEAVY-DUTY HANDHOLES TO BE USED WHEN THE MEDIAN IS MOUNTABLE. REFER TO STANDARD BIAODI TO ENSURE THAT HANDHOLE FITS IN MEDIAN. TRENCHED 1" 125 mm) WEDIAN (TYP.) ** * (600 mm) ** * (600 mm) ** * (600 mm) ** * (600 mm) ** * UNIT DUCT IS TO BE SHOWN ON PLAN SHEETS BUT SHALL NOT BE INCLUDED IN THE PAY ITEMS. NOTE: DUAL LEFT TURNS NOT SHOWN REFER TO

VOLUME DENSITY ("FAR OUT" DETECTION) ON SAME APPROACH (PROTECTED / PERMITTED LEFT TURN PHASING) * = (600 mm) *

NOTE: DUAL LEFT TURNS NOT SHOWN REFER TO PLAN SHEET FOR DETECTOR LOOP REPLACEMENT


SCALE: NONE

PLAN SHEET FOR DETECTOR LOOP REPLACEMENT

ARTERIAL-VOLUME DENSITY ("FAR OUT" DETECTION)

ON)

CROSS STREET-NON VOLUME DENSITY ("UPTIGHT" PRESENCE DETECTION)

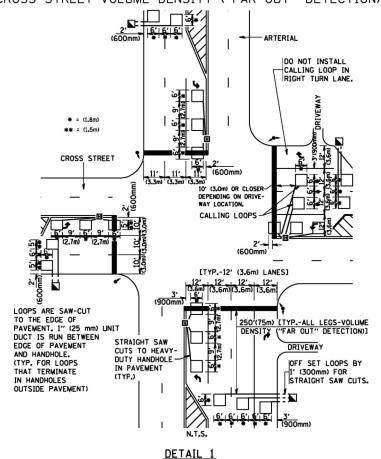

N.T.S.

USER NAME = gaglianobt

PLOT DATE = 1/4/2008

PLOT SCALE = 50.0000 '/ IN.

DESIGNED -

DRAWN

DATE

CHECKED

REVISED


REVISED

REVISED

REVISED

FILE NAME =

W:\diststd\22x34\ts07.dor

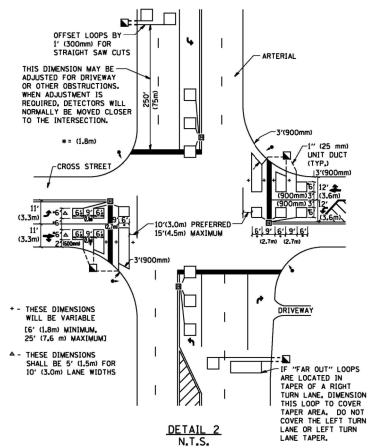

NOTES:

VEHICLES LOOP DETECTORS

- * ALL LEAD IN CABLE SHALL BE TWO CONDUCTOR NO. 14 TWISTED, SHIFLDED.
- * EACH DETECTOR LOOP SHALL HAVE ITS OWN SAW CUT FROM THE LOOP TO THE EDGE OF PAVEMENT OR TO A HANDHOLE IN THE PAVEMENT.
- * EACH DETECTOR LOOP SHALL HAVE ITS OWN ONE INCH (25 mm) UNIT DUCT BETWEEN THE EDGE OF PAVEMENT AND THE FIRST HANDHOLE OR JUNCTION BOX. EACH UNIT DUCT RUN SHALL BE SHOWN ON THE PLANS BY THE DESIGNER, BUT SHALL NOT BE PAID FOR SEPARATLY. THIS ITEM IS INCIDENTAL TO THE PAY ITEM FOR DETECTOR LOOPS.
- * ONE DIMENSION OF <u>ALL</u> DETECTOR LOOPS SHALL BE SIX FEET (1.8 m)
- * EACH LANE OF NON-LOCKING, PRESENCE DETECTION AND EACH LANE OF A DOUBLE LEFT TURN LANE REQUIRES A SEPARATE INDUCTIVE LOOP DETECTOR AND LEAD IN CABLE.
- * WHEN NON-LOCKING, PRESENCE DETECTION IS USED, MORE THAN ONE LOOP PER LANE IS REQUIRED BEHIND THE STOP BAR (i.e. 1-1/2, 1-3/4, 2).
- * WHEN SYSTEM LOOPS ARE REQUIRED ON AN APPROACH OF AN INTERSECTION, THE LOOPS USED FOR VOLUME DENSITY AND INTERSECTION TIMING SHALL ALSO BE USED AS SYSTEM DETECTORS. EACH ONE OF THESE TYPE OF LOOPS REQUIRES A SEPARATE TWO CONDUCTOR NO. 14 TWISTED SHIELDED CABLE AND A SEPARATE INDUCTIVE LOOP DETECTOR WHEN NEW CONTROLLERS ARE UTILIZED. THE DESIGNER SHALL LABEL THESE TYPES OF LOOPS AS "INTERSECTION AND SAMPLING (SYSTEM) DETECTORS" ON THE SIGNAL LAYOUT, THE INTERCONNECT PLAN AND THE SYSTEM CABLE PLAN. WHEN AN EXISTING CONTROLLER IS UTILIZED FOR THIS TYPE OF DETECTION, THE PAY ITEM "INDUCTIVE LOOP DETECTOR WITH SYSTEM OUTPUT" SHOULD BE USED.

PLACEMENT OF DETECTORS

THE FOLLOWING FIGURES REPRESENT THE MOST COMMON DETECTOR LOOP LOCATIONS AND SIZES. ADJUSTMENTS WILL BE NECESSARY FOR SPECIFIC GEOMETRIC CONSIDERATIONS.

LOCATIONS AND DEMENSIONS OF DETECTOR LOOPS ARE REQUIRED ON ALL SIGNAL LAYOUT PLAN SHEETS.

"FAR OUT" DETECTION REFERS TO LOCKING, PRESENCE TYPE DETECTION LOCATED IN THRU LANES, RIGHT TURN LANES, AND RIGHT TURN LANE TAPER AREAS (IF APPLICABLE), USUALLY 250' (75 m) IN ADVANCE OF STOP BARS. "UPTIGHT" DETECTION REFERS TO NON-LOCKING PRESENCE TYPE DETECTION LOCATED IN ALL LANES AND 10'-15' (3.0 m-4.5 m) BEHIND THE CROSSING STREET'S EDGE OF PAVEMENT EXTENDED.

NOTE:

ALL DETAILS AND NOTES SHOWN ARE FROM THE I.D.O.T. DISTRICT 1 TRAFFIC SIGNAL DESIGN GUIDELINES DATED JANUARY 1995

THIS DRAWING HAS BEEN PREPARED TO ASSIST THE RESIDENT ENGINEER FOR ALL ROADWAY RESURFACING OR S.M.A.R.T. PROJECTS WHERE THE DIMENSIONS ARE NOT SHOWN ON THE PLANS AND THE FINAL LOCATIONS FOR CROSSWALKS OR STOP BARS ARE NOT DETERMINED.

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION