
## TWO CENTER CURVE DATA

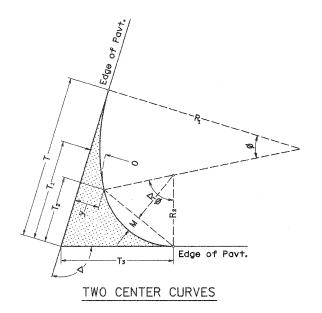


REVISED - 3-22-90

CURVE NO.	1	2	3
R1	120.00	140.00	360.00
R2	30.00	70.00	60.00
0	10.00	10.00	13.00
DELTA	90.00	90,00	80.00
T	71.23	106.06	135.41
T1	30.00	70.00	48.05
T2	16.26	33.94	30.58
Т3	40.00	80.00	63.55
у	13.33	20.00	15.60
4y/9	5.93	8.89	6.93
y/9	1.48	2.22	1.73
М	4.38	9.07	8.86
15M/16	4.11	8.51	8.31
3M/4	3.29	6.81	6.65
7M/16	1.92	3.97	3.88
С	31.23	68.94	62.76

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.


## TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC)

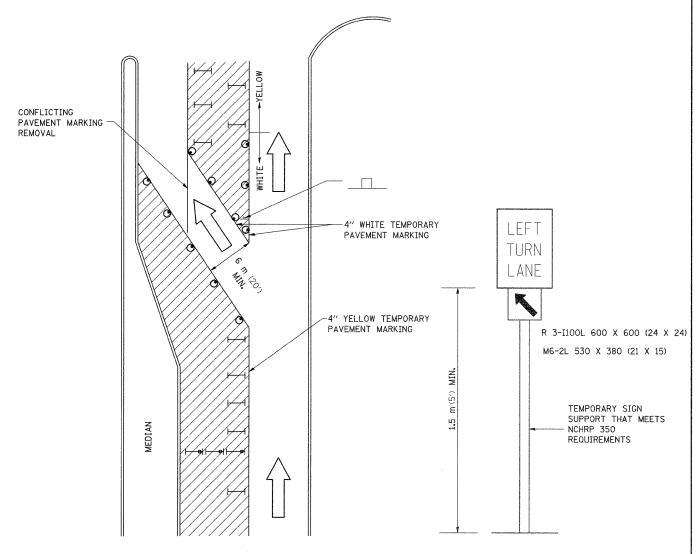

## LEGEND







SIGN (SEE DETAIL)

DRUM OR BARRICADE WITH STEADY BURN LIGHT

TYPE I OR II CHECK BARRICADE WITH STEADY

## GENERAL NOTES

CONES MAY BE SUBSTITUTED FOR BARRICADES OR DRUMS AT HALF THE SPACING DURING DAY OPERATIONS. CONES SHALL BE A MINIMUM OF 710 (28) IN HEIGHT.

STEADY BURNING LIGHTS WILL NOT BE REQUIRED ON BARRICADES OR DRUMS FOR DAY OPERATIONS. ALL LIGHTS WILL BE MONODIRECTIONAL.

TEMPORARY PAVEMENT MARKING SHALL BE PLACED THROUGHOUT THE BARRICADED AREA OF EACH BAY WHERE THE CLOSURE TIME IS GREATER THAN FOURTEEN DAYS

THIS APPLICATION ALSO APPLIES WHEN WORK IS BEING PERFORMED IN THE RIGHT LANE(S) AND THE RIGHT TURN BAY IS TO REMAIN OPEN. UNDER THIS CONDITION, "RIGHT TURN LANE" R3-100 600  $\times$  600 (24  $\times$  24) AND M6-2R 530  $\times$  380 (21  $\times$  15) SHALL BE USED.

THESE CONTROLS SHALL SUPPLEMENT MAINLINE TRAFFIC CONTROL FOR LANE CLOSURES, LONGITUDINAL DIMENSIONS MAY BE ADJUSTED TO FIT FIELD CONDITIONS.

TRAFFIC CONTROL AND PROTECTION AT TURN BAYS (TO REMAIN OPEN TO TRAFFIC) SHALL BE INCLUDED IN THE COST SPECIFIED TRAFFIC CONTROL STANDARDS OR ITEMS.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

REVISED - 10-15-04		F.A.P. RTE.	SECTION	COUNTY	TOTAL	SHEET NO.
REVISED -	REGION 2 / DISTRICT 2 STANDARD	301	31T	JO DAVIESS	160	60
REVISED -					·	64D92
REVISED -	SCALE: 50.0000 / IN SHEET NO. OF SHEETS STA. TO STA.	FED. RC	AD DIST. NO.   ILLINOIS FED. AL			