
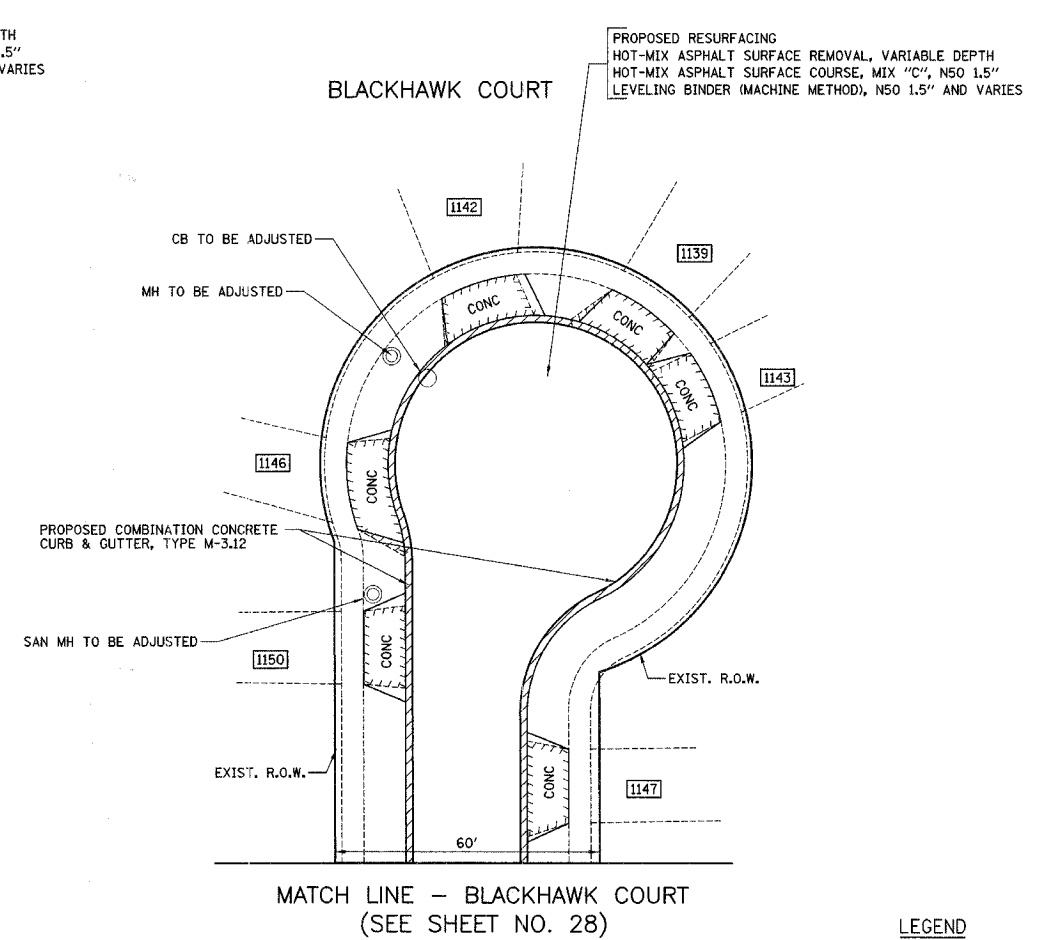
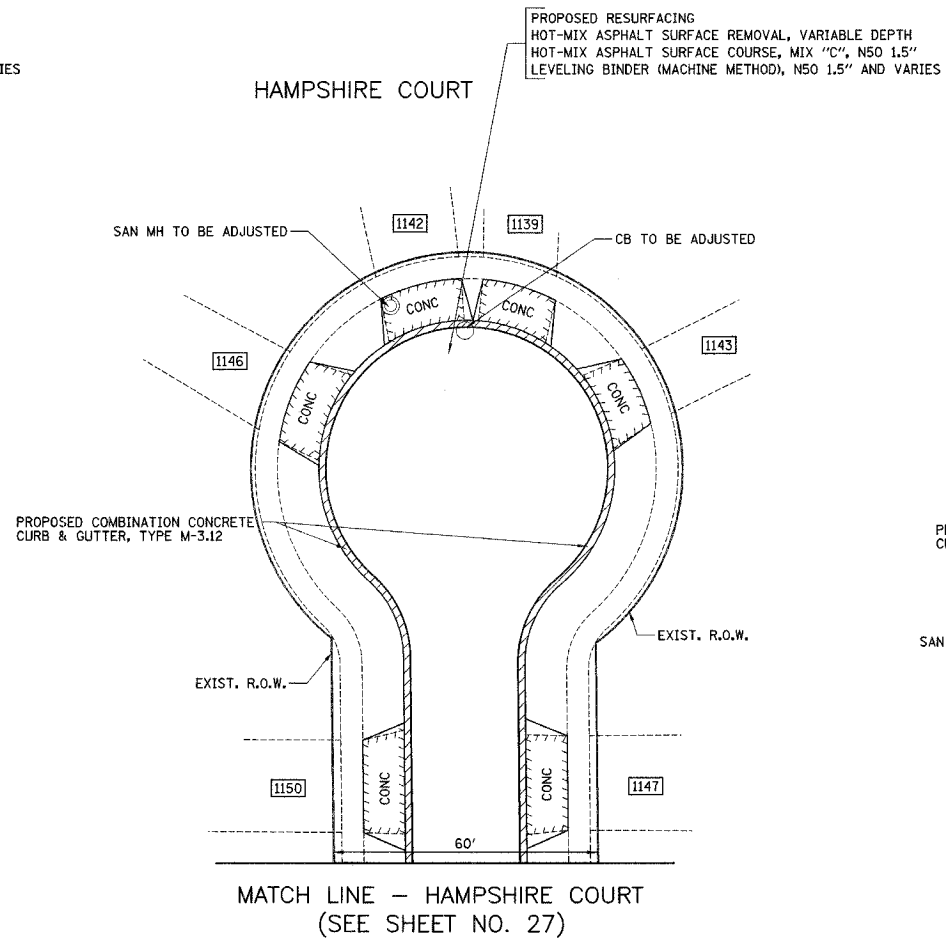


F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
1338	05-00083-00-FF	COOK	167	37
STA.		TO STA.		
FED. ROAD DIST. NO. 7 ILLINOIS FED. AID PROJECT M-8003(S12)				

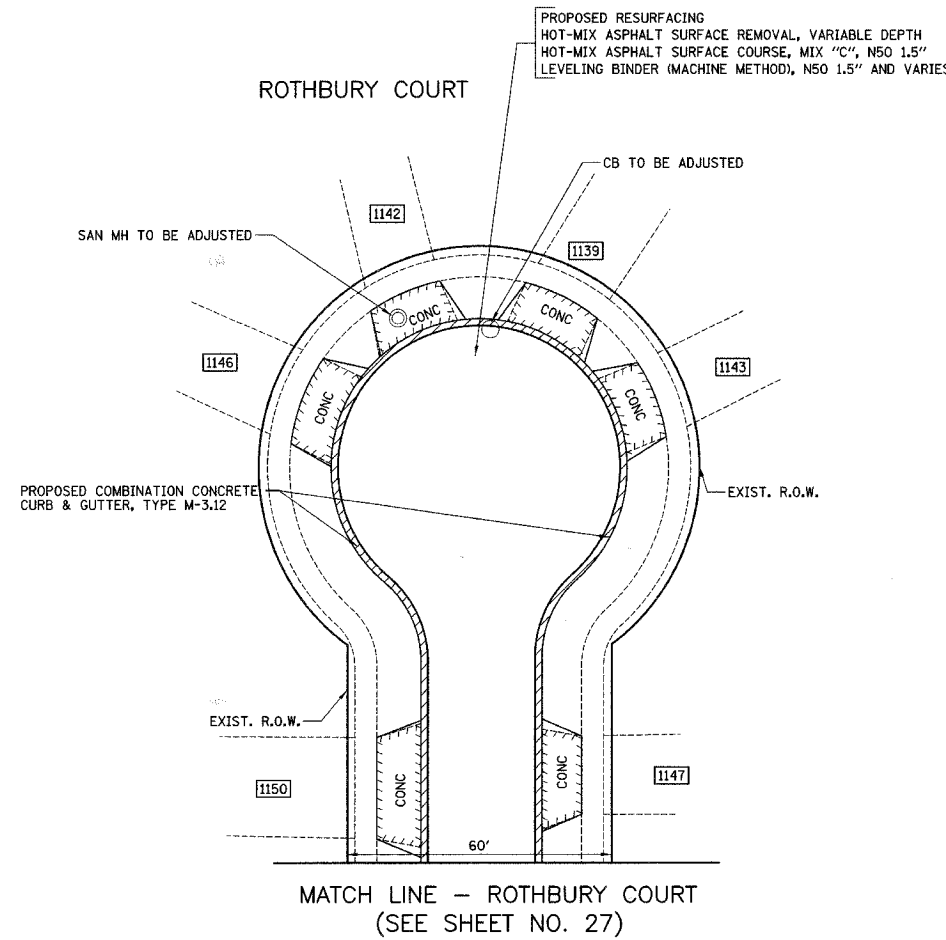


SCHEDULE OF CUL-DE-SAC QUANTITIES

CODED PAY ITEM NO.	ITEM	UNIT	CREST COURT	JAMESTOWN COURT	DURHAM COURT	ROTHBURY COURT	HAMPSHIRE COURT	BLACKHAWK COURT
21101615	TOPSOIL FURNISH AND PLACE, 4"	SQYD	353	726	262	270	287	283
25000400	NITROGEN FERTILIZER NUTRIENT	POUND	4	9	3	3	4	4
25000500	PHOSPHORUS FERTILIZER NUTRIENT	POUND	4	9	3	3	4	4
25000600	POTASSIUM FERTILIZER NUTRIENT	POUND	4	9	3	3	4	4
25200110	SODDING SALT TOLERANT	SQYD	353	726	262	270	287	283
25200200	SUPPLEMENTAL WATERING	UNIT	5	11	4	4	5	5
28000510	INLET FILTERS	EACH	2	2	1	1	1	1
31101400	SUB-BASE GRANULAR MATERIAL, TYPE B 6"	SQYD	137	241	89	90	89	91
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GAL	78	126	54	55	55	57
40600300	AGGREGATE (PRIME COAT)	TON	1	1	0.5	0.5	0.5	0.5
40600625	LEVELING BINDER (MACHINE METHOD), N50	TON	87	141	60	62	62	64
40600982	HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT	SQYD	12	12	12	12	12	12
40603310	HOT-MIX ASPHALT SURFACE COURSE, MIX 'C', N50	TON	65	106	45	46	46	48
42001300	PROTECTIVE COAT	SQYD	451	589	316	265	302	263
42300700	PORTLAND CEMENT CONCRETE DRIVEWAY PAVEMENT, 5 INCH, SPECIAL	SQYD	212	307	165	138	135	129
42400430	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH, SPECIAL	SOFT	1238	935	770	550	910	605
44000198	HOT-MIX ASPHALT SURFACE REMOVAL, VARIABLE DEPTH	SQYD	772	1254	535	547	547	568
44000200	DRIVEWAY PAVEMENT REMOVAL	SQYD	194	282	153	128	123	123
44000500	COMBINATION CURB AND GUTTER REMOVAL	FOOT	475	839	308	311	310	315
44000600	SIDEWALK REMOVAL	SOFT	1238	935	770	550	910	605
44201717	CLASS D PATCHES, TYPE II, 6 INCH	SQYD	78	126	54	55	55	57
44201721	CLASS D PATCHES, TYPE III, 6 INCH	SQYD	78	126	54	55	55	57
44300100	AREA REFLECTIVE CRACK CONTROL TREATMENT	SQYD	772	1254	535	547	547	568

CODED PAY ITEM NO.	ITEM	UNIT	CREST COURT	JAMESTOWN COURT	DURHAM COURT	ROTHBURY COURT	HAMPSHIRE COURT	BLACKHAWK COURT
56500600	DOMESTIC WATER SERVICE BOXES TO BE ADJUSTED	EACH	8	12	6	6	6	6
60250200	CATCH BASINS TO BE ADJUSTED	EACH	2	2	1	1	1	1
60255500	MANHOLES TO BE ADJUSTED	EACH	1	0	0	0	0	1
60265700	VALVE VAULTS TO BE ADJUSTED	EACH	0	1	0	0	0	0
XX005656	INLET FILTER CLEANING	EACH	4	4	2	2	2	2
X0321556	SANITARY MANHOLES TO BE ADJUSTED	EACH	1	1	1	1	1	1
	COMBINATION CONCRETE CURB AND GUTTER, TYPE M-3.12	FOOT	475	839	308	311	310	315

NOTES:

1. LINENWORK FOR WORK ON THE CUL-DE-SACS IS BASED ON AERIAL IMAGES. THE CONTRACTOR SHALL CONFIRM ACTUAL DIMENSIONS PRIOR TO STARTING WORK.
2. REMOVE AND REPLACE SIDEWALK AS DIRECTED BY THE ENGINEER. QUANTITIES FOR "SIDEWALK REMOVAL" AND "PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH, SPECIAL" HAVE BEEN INCLUDED BASED ON FIELD CHECKS OF THE CUL-DE-SACS.
3. UPON THE COMPLETION OF THE HOT-MIX ASPHALT SURFACE REMOVAL, THE ENGINEER WILL DETERMINE THE LIMITS OF THE REQUIRED PATCHING. THE PROPOSED PATCHES SHALL BE PAID FOR AS CLASS D PATCH, 6" OF THE TYPE REQUIRED.
4. INSTALL INLET FILTERS IN ALL OPEN GRATED STRUCTURES.
5. PARKWAYS SHALL BE RESTORED WITH TOPSOIL FURNISH AND PLACE, 4" AND SODDING, SALT TOLERANT.



ILLINOIS DEPARTMENT OF TRANSPORTATION
CUL-DE-SAC IMPROVEMENT PLAN
 ROTHBURY COURT / HAMPSHIRE COURT / BLACKHAWK COURT

DATE: 9/28/07
 DESIGNED BY: DJK
 CHECKED BY: JRV

20 0 20
 SCALE IN FEET