

**NOTES**

1. ADVANCE SIGN LOCATIONS SHALL BE COORDINATED WITH ADJACENT CONTRACT. "ROAD CONSTRUCTION AHEAD" SIGN SHALL BE PLACED WHEN WARRANTED BY WORK ZONE CONDITIONS OR AS DIRECTED BY THE ENGINEER.
2. EXISTING LANE CONFIGURATIONS ARE TO REMAIN IN OPERATION DURING THIS STAGE OF CONSTRUCTION.
3. SEE TEMPORARY PAVEMENT DETAIL ON MAINTENANCE OF TRAFFIC DETAILS SHEET.
4. LANE CLOSURES WILL BE PERMITTED ONLY DURING OFF-PEAK PERIODS AS DETERMINED BY THE ENGINEER, SEE MOT TYPICAL SECTIONS.
5. AT THE LIMITS OF THE CURB AND GUTTER, HORIZONTAL AND VERTICAL TRANSITIONS SHALL BE INSTALLED IN ACCORDANCE WITH THE MAINTENANCE OF TRAFFIC DETAILS AND AS DIRECTED BY THE ENGINEER.

FOR TEMPORARY PAVEMENT CONSTRUCTION  
USE HIGHWAY STANDARDS NO. 701606 & 701701


FOR STORM SEWER AND WATER MAIN CONSTRUCTION  
USE HIGHWAY STANDARDS NO. 701101 & 701106

ROAD CONSTRUCTION AHEAD SIGNAGE [W20-1(O)] SHALL  
BE IN ACCORDANCE WITH IDOT DISTRICT 1 DETAIL TC-10

**LEGEND**

TEMPORARY PAVEMENT CONSTRUCTED THIS STAGE

DIRECTION OF TRAFFIC

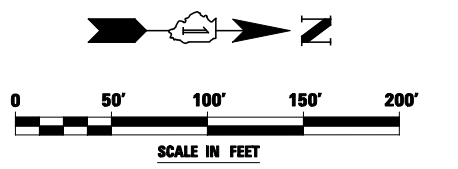

FILE NAME = #FILEL#	USER NAME = #USER#	DESIGNED <i>PJO</i>	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>MAINTENANCE OF TRAFFIC - PRE-STAGE 1 ILLINOIS ROUTE 59</b>	F.A.P. RTE. 338	SECTION (112 & 113) WRS-5	COUNTY DUPAGE	TOTAL SHEETS 963	SHEET NO. 117		
	PLOT SCALE = #SCALE#	CHECKED <i>JCM</i>	REVISED -			SCALE:	SHEET NO. 1 OF 118 SHEETS	STA. 4038+00	TO STA. 4051+00	CONTRACT NO. 60I31		
	PLOT DATE = #DATE#	DATE <i>10/15/2012</i>	REVISED -			ILLINOIS FED. AID PROJECT						