
TERMINATION OF DEAD END ROADS


NOTES: A "NO OUTLET" (36"×36" YELLOW) SIGN SHALL BE ERECTED SLIGHTLY BEYOND THE LAST ROAD INTERSECTING THE ROAD WITH NO OUTLET. IF THIS INTERSECTION IS MORE THAN 457 m (1500 FT) FROM TERMINATION POINT, OR IF SIGHT DISTANCE TO THE CLOSURE IS LESS THAN 152 m (500 FT), A ROAD ENDS 152m (500 FT.) (WB-16) SIGN SHALL BE ERECTED 152m (500 FT.) IN ADVANCE OF THE TERMINATION OF THE ROAD. THIS WORK WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER EACH FOR "TERMINATION OF DEAD END ROADS" WHICH PRICE SHALL INCLUDE ALL LABOR, MATERIALS AND EQUIPMENT NECESSARY TO INSTALL THE SIGNS AND DELINEATORS.

USE 100×150 (4×6) WOOD POSTS INSTALLED IN ACCORDANCE WITH ARTICLE 730.0 OF STANDARD SPECIFICATIONS FOR TRAFFIC CONTROL ITEMS. USE APPLICABLE PARTS OF STANDARD 720001 FOR SIGN MOUNTING.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

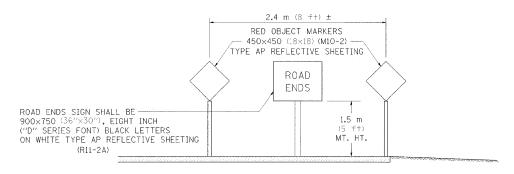

TERMINATION SIGNING

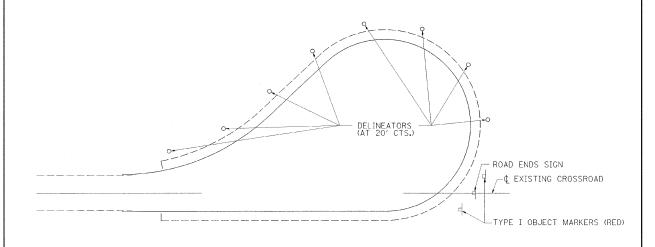

TRAFFIC CONTROL
TYPICAL CUL-DE-SAC

IDNR PROJECT #1-08-001 TYPICAL AGGREGATE **BASE SIDEROAD** ¢ SIDEROAD R-VARIES R-VARIES VAR VAR 1.2 m (4 f+) SIDE RD.-SHLDR. -300 (12) END MAINLINE -- END MAINLINE EDGE LINE 200 (8) BIT. SHLDR. 200 (8) BIT. SHLDR. 3.9 m (13 ft) & VAR 3.9 m (13 ft) & —¢ MAINLINE ₡ SIDEROAD 1.2 m SHLD.800 B001.2 m SHLD. -STRIPE STRIPE-- 77 (3) INCIDENTAL HOT-MIX ASPHALT SURFACING -305 (12) AGGREGATE BASE COURSE TYPE B ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS

