


SIDE VIEW (SINGLE MEMBER OR DAVIT ARM) N.T.S.

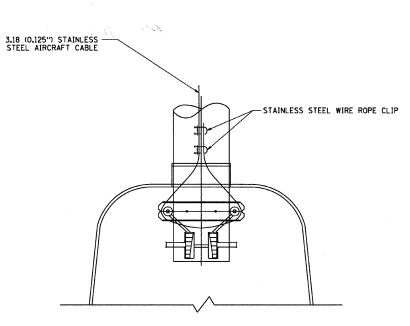

BOTTOM VIEW N.T.S.

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN
- CONTRACTOR SHALL ADJUST THE WIRE CLIP TO ELIMINATE ANY SLACK FROM THE WIRE ROPE.
- 3. THE 3.18 (0.125") STAINLESS STEEL AIRCRAFT CABLE SHALL REMAIN VISIBLE FROM THE GROUND LEVEL
- 4. THE BREAKING STRENGTH OF THE CABLE SHALL BE 1700 LBS. MIN

REVISIONS		ILLINOIS DEPARTMENT OF TRANSPORTATION	
NAME	DATE	ILLINOIS DE ANTI-	ATT OF THANSFORTATION
		LUMINAIRE SAFETY CABLE ASSEMBLY	
	_		
		SCALE: VERT.	DD AWAY DV
			DRAWN BY
		DATE: 2/15/2006	CHECKED BY
			DE 701

BE-701 REVISION DATE:

STAINLESS STEEL U-BOLT HAYARD