

GENERAL NOTES:

DRIVEWAY SLOPES, LOCATIONS, & GEOMETRIC LAYOUT SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE "HANDBOOK FOR POLICY ON PERMITS FOR ACCESS DRIVEWAYS TO STATE HIGHWAYS". FOR FURTHER LAYOUT REQUIREMENTS, REFER TO ILLUSTRATIONS IN THE PERMIT HANDBOOK. DRIVEWAYS SHALL BE REPLACED IN KIND, UNLESS OTHERWISE NOTED ON THE PLANS.


COMMERCIAL DRIVEWAYS SHALL BE CONSTRUCTED WITH CONCRETE CURB, TYPE B RETURNS EXCEPT WHEN THE SIDEWALK EDGE IS 4 FEET (1.2 METERS) OR LESS FROM THE BACK OF CURB, CONSTRUCT A FLARE DRIVEWAY WITHOUT CURB.

THE RESIDENT ENGINEER SHALL CONTACT THE TRAFFIC PERMIT OFFICE AT 847/ 705-4131 FOR ANY QUESTIONS ON DRIVEWAYS SHOWN IN THE PLANS; SPECIFICALLY IN REFERENCE TO ADDITIONAL AND/OR RELOCATION/REMOVAL OF A DRIVEWAY.

COMBINATION CONCRETE CURB & GUTTER SHALL BE MEASURED STRAIGHT ACROSS THE DRIVEWAY. NO ADDITIONAL COMPENSATION WILL BE ALLOWED FOR THE CURB & GUTTER TRANSITION.

1 (25) PREFORMED EXPANSION JOINT FILLER WILL NOT BE PAID SEPARATELY, BUT SHALL BE CONSIDERED INCLUDED IN THE COST OF THE P.C.C. DRIVEWAY PAVEMENT OR P.C.C. SIDEWALK.


WHEN THE P.C.C. SIDEWALK EXTENDS THROUGH THE DRIVEWAY, THE THICKNESS OF THE SIDEWALK IN THE DRIVEWAY AREA SHALL BE THE SAME AS THE DRIVEWAY THICKNESS. SIDEWALK WILL BE PAID FOR AS P.C.C. SIDEWALK OF THE THICKNESS SPECIFIED. SIDEWALK CROSS SLOPE THRU DRIVEWAY AREA TO BE A MAXIMUM OF 1:50.

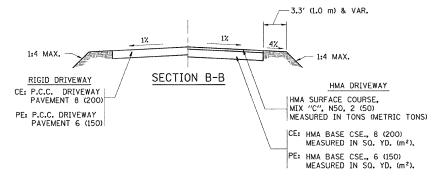

RURAL FIELD ENTRANCE (FE)

HMA SURFACE COURSE. MIX "C", N50, 2 (50)
MEASURED IN TONS (METRIC TONS)

AGGREGATE BASE CSE., TYPE A 8 (200) MEASURED IN SQ. YD. (m²).

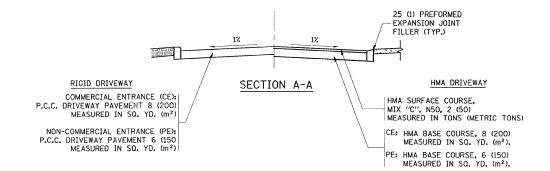

EXISTING DRIVEWAY OR

PARKING LOT

WIDTH OF DRIVEWAY
(SEE PLANS)

- 12 (300) STUB

DEPRESSED CURB PROPOSED PAVEMENT

WITH CONCRETE CURB, TYPE B

SEE NOTE 3

12 (300) STUB

FLOW LINE OF GUTTER-

WITH CONCRETE CURB, TYPE B

PAVEMENT

DEPRESSED CURB

CURB RAMP PER STD. 424001 (TYP.)

TYP. TRANSITION 300(12)-

-12 (300) & VAR.

-12 (300) & VAR.

R.O.W. LINE

P.C.C. SIDEWALK

- R.O.W. LINE

P.C.C. SIDEWALK

- R = 15' (4.5 m) MIN.

PARKWAY (TYP.)

EXISTING CURB (TYP.)-

CONCRETE CURB TYPE B (TYP.)-CURB AND GUTTER TRANSITION (TYP.)

EXISTING CURB (TYP.)-

PARKWAY (TYP.)

R=10' (3.0 m) TYP. MIN.

P.C.C. SIDEWALK

COMBINATION

CURB & GUTTER

P.C.C. X SIDEWALK

EXISTING DRIVEWAY OR PARKING LOT

> ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE NOTED

REVISIONS		
NAME	DATE	ILLINOIS DEPARTA
R. SHAH	11-04-95	DRIVEW
J. POLLASTRINI	08-12-96	
J. POLLASTRINI	12-14-96	DISTANCE BE
A. ABBAS	03-21-97	FACE OF C
T. HOLTZ	04-08-97	
M. GOMEZ	04-06-01	SHOULDER
P. LaFLEUR	04-15-03	
R. BORO	01-01-07	SCALE: VERT. NONE
		SCALET HODET NUME

MENT OF TRANSPORTATION VAY DETAILS TWEEN R.O.W. AND CURB & EDGE OF >= 15' (4.5 m)

CHECKED BY BD0156-07 (BD-01)