






STAGE 3A TEMPORARY TRAFFIC SIGNALS
SEE SHEET TS-25 FOR STAGE 3A TEMPORARY CABLE PLAN

RESTORATION OF WORK AREA. RESTORATION OF THE TRAFFIC SIGNAL WORK AREA SHALL BE INCIDENTAL TO THE RELATED PAY ITEM SUCH AS FOUNDATION, CONDUIT, HANDHOLE, TRENCH AND BACKFILL, ETC., AND NO EXTRA COMPENSATION SHALL BE ALLOWED. ALL ROADWAY SURFACES SUCH AS SHOULDERS, MEDIANS, SIDEWALKS, PAVEMENT, ETC. SHALL BE REPLACED IN KIND. ALL DAMAGE TO MOWED LAWNS SHALL BE REPLACED WITH AN APPROVED SOD, AND ALL DAMAGE TO UNMOWED FIELDS SHALL BE SEEDDED IN ACCORDANCE WITH STANDARD SPECIFICATIONS 252 AND 250 RESPECTIVELY.


THE TRAFFIC SIGNAL CONTROLLER EQUIPMENT SHALL BE "ECONOLITE" TO MATCH THE EXISTING ADJACENT SYSTEM.

LEGEND

-  CONSTRUCTION WORK ZONE
-  TEMPORARY PAVEMENT PLACED IN THIS STAGE
-  DIRECTION OF TRAFFIC
-  VIDEO DETECTION ZONE

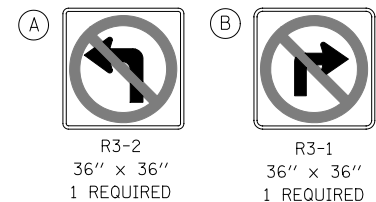

INCIDENTAL TO TEMPORARY TRAFFIC SIGNAL INSTALLATION



FILE NAME = #FILE#	USER NAME = #USER#	DESIGNED <i>MJM</i>	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TEMPORARY TRAFFIC SIGNAL INSTALLATION MOT STAGE 3A ILLINOIS ROUTE 59 AND I-88 SOUTH RAMPS			F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
		DRAWN <i>KES</i>	REVISED -		SCALE: AS SHOWN	SHEET NO. 26 OF 53 SHEETS	STA.	TO STA.	338	(112 & 113) WRS-5	DUPAGE	963	441
		CHECKED <i>JCM</i>	REVISED -						TS-26		CONTRACT NO. 60131		
		DATE <i>10/15/2012</i>	REVISED -						ILLINOIS FED. AID PROJECT				