


EROSION CONTROL LEGEND

- | | | | |
|--|--|--|---|
| | TEMPORARY EROSION CONTROL SEEDING AND TEMPORARY EROSION CONTROL BLANKET | | TEMPORARY DITCH CHECK |
| | PERMANENT SEEDING (SEE NOTE 3) | | TEMPORARY DITCH CHECK INSTALLED IN PREVIOUS STAGE |
| | TEMPORARY EROSION CONTROL SEEDING OR PERMANENT SEEDING INSTALLED IN A PREVIOUS STAGE | | INLET & PIPE PROTECTION |
| | TEMPORARY PAVEMENT | | INLET & PIPE PROTECTION INSTALLED IN PREVIOUS STAGE |
| | PERIMETER EROSION BARRIER (SEE NOTE 2) | | FLOW DIRECTION (SEE NOTE 4) |
| | PERIMETER EROSION BARRIER INSTALLED IN PREVIOUS STAGE | | PROPOSED STORM SEWER (SEE NOTE 1) |
| | INLET FILTER | | PROPOSED STORM SEWER INSTALLED IN PREVIOUS STAGE |
| | INLET FILTER INSTALLED IN PREVIOUS STAGE | | TEMPORARY PIPE CULVERT |
| | PERMANENT DRAINAGE STRUCTURE NUMBER (SEE NOTE 1) | | |

NOTES

- SEE PROPOSED DRAINAGE PLANS FOR STORM SEWER INFORMATION
- PERIMETER EROSION BARRIER SHALL BE ERECTED ADJACENT TO R.O.W., EASEMENT, AND CONSTRUCTION LIMITS AND AS DIRECTED BY THE ENGINEER.
- SEE LANDSCAPING PLANS FOR LANDSCAPING REQUIREMENTS.
- SEE PRE-STAGE CROSS SECTIONS FOR GRADING INFORMATION.

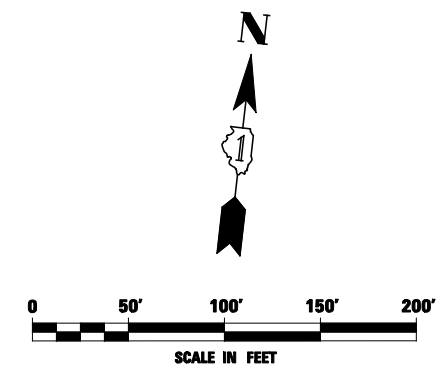

FILE NAME = #FILE#	USER NAME = #USER#	DESIGNED <i>PJO</i>	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	EROSION CONTROL - PRESTAGE RAMP A		F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
		DRAWN <i>KES</i>	REVISED -		SCALE:	SHEET NO. 8 OF 66 SHEETS	STA. 1033+00 TO STA. 1041+55	338	(112 & 113) WRS-5	DUPAGE	963	483
		CHECKED <i>JCM</i>	REVISED -		CONTRACT NO. 60I31							
		DATE <i>10/15/2012</i>	REVISED -		ILLINOIS FED. AID PROJECT							