


EROSION CONTROL LEGEND

| | | | |
|--|--|--|---|
| | TEMPORARY EROSION CONTROL SEEDING AND TEMPORARY EROSION CONTROL BLANKET | | TEMPORARY DITCH CHECK |
| | PERMANENT SEEDING (SEE NOTE 3) | | TEMPORARY DITCH CHECK INSTALLED IN PREVIOUS STAGE |
| | TEMPORARY EROSION CONTROL SEEDING OR PERMANENT SEEDING INSTALLED IN A PREVIOUS STAGE | | INLET & PIPE PROTECTION |
| | TEMPORARY PAVEMENT | | INLET & PIPE PROTECTION INSTALLED IN PREVIOUS STAGE |
| | PERIMETER EROSION BARRIER (SEE NOTE 2) | | FLOW DIRECTION (SEE NOTE 4) |
| | PERIMETER EROSION BARRIER INSTALLED IN PREVIOUS STAGE | | PROPOSED STORM SEWER (SEE NOTE 1) |
| | INLET FILTER | | PROPOSED STORM SEWER INSTALLED IN PREVIOUS STAGE |
| | INLET FILTER INSTALLED IN PREVIOUS STAGE | | TEMPORARY PIPE CULVERT |
| | PERMANENT DRAINAGE STRUCTURE NUMBER (SEE NOTE 1) | | |

NOTES

1. SEE PROPOSED DRAINAGE PLANS FOR STORM SEWER INFORMATION
2. PERIMETER EROSION BARRIER SHALL BE ERECTED ADJACENT TO R.O.W., EASEMENT, AND CONSTRUCTION LIMITS AND AS DIRECTED BY THE ENGINEER.
3. SEE LANDSCAPING PLANS FOR LANDSCAPING REQUIREMENTS.
4. SEE STAGE 4 CROSS SECTIONS FOR GRADING INFORMATION.

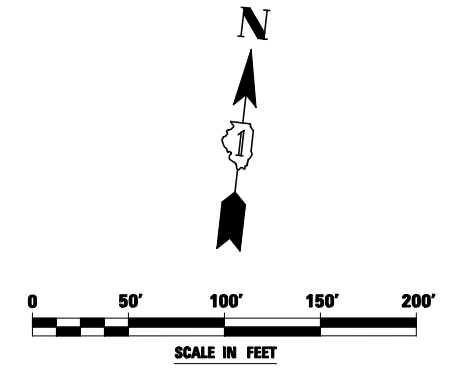

| | | | | | | | | | | | |
|-----------------------|--------------------|------------------------|-----------|---|---|---------------------------|-------------------|--------|--------------|-----------|--|
| FILE NAME = #FILE# | USER NAME = #USER# | DESIGNED <i>PJO</i> | REVISED - | STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION | EROSION CONTROL - STAGE 4, 4A, AND 4B RAMP A | F.A.P. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. | |
| | | DRAWN <i>KES</i> | REVISED - | | | 338 | (112 & 113) WRS-5 | DUPAGE | 963 | 534 | |
| | | CHECKED <i>JCM</i> | REVISED - | | | CONTRACT NO. 60I31 | | | | | |
| | | DATE <i>10/15/2012</i> | REVISED - | | | ILLINOIS FED. AID PROJECT | | | | | |
| | | | | SCALE: | SHEET NO. 59 OF 66 SHEETS | STA. 1019+00 | TO STA. 1033+00 | | | | |