

SHEETS	NO.
26	14
	26 CT NO. 839



NOTE:
USE TWO NO. 5 RE-BARS FOR 10' ON EITHER SIDE OF ALL UTILITY TRENCHES.
INSTALL 1" EXPANSION JOINT AT POINTS OF CURVATURE, AT CONSTRUCTION
JOINTS AND AT A DISTANCE NOT TO EXCEED 60'. CONTRACTION JOINTS SHALL
BE PLACED BETWEEN EXPANSION JOINTS AT DISTANCES NOT TO EXCEED 15'.

COMBINATION CURB & GUTTER

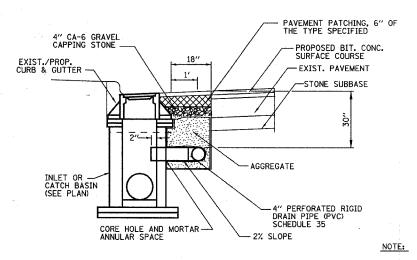

FRONT OF GUTTER

INLET OR CATCH BASIN
(SEE PLAN)

AGGREGATE

4" X 4" PVC TEE

4" PERFORATED RIGID DRAIN PIPE (PVC) SCHEDULE 35, 2% SLOPE

CRANULAR UNDERDRAIN CONTINUES BETWEEN STORM STRUCTURES

- 1. BEDDING MATERIAL AND BACKFILL SHALL BE CA-7 (WASHED) COURSE AGGREGATE
- 2. PIPE UNDERDRAIN SHALL BE ENCASED IN KNITTED FABRIC ENVELOPE

PAVEMENT UNDERDRAIN-CONTINUOUS ALONG EDGE OF PAVEMENT

			U	25	100 S. WACKE CHICAGO IL.)-939-1000)-939-4198	
I	REVISIONS			1771		E 11100	T	205		
1	NAME	DATE		VIL	LAGE O	F WOO	DKIL	JGE		
[JANES	AVEN	IF			
[/1ST	STRI	EET TO	LORR	AINE	AVE	ENUE	
			DCU.	ADTI T	LATTON	AND E	CL	IDE A	STAIC	
[RC.FI	ADILI	IAIION	TON AND RESI			JKL ACTIVE	
				MISC	ELLANE	OUS D	FTA	TLS		
- 1				200			- · /\			
- 1			SCALE:	NONE			DRAWN	IBY: V	/AP	
-			DATE.	11 /20 /20	07					
			DATE:	11/30/20	07		CHECK	ED BY:	DDL	