


PROPOSED TYPICAL SECTION - MORGAN ST. (WEST LEG)
STA 186+44 TO STA 190+00

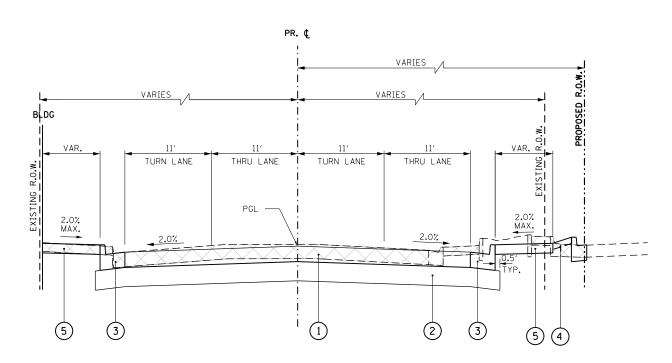

PROPOSED TYPICAL SECTION - MORGAN ST. (EAST LEG)

STA 190+00 TO STA 191+47

=	USER NAME = \$USER\$	DESIGNED -	REVISED -			PROPOSED TYPICAL	SECTIONS
		DRAWN -	REVISED -	STATE OF ILLINOIS	THOI COLD TITICAL SECTIONS		
	PLOT SCALE = \$SCALE\$	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION			
	PLOT DATE = \$DATE\$	DATE -	REVISED -		SCALE:	SHEET NO. 17 OF 20 SHEETS	STA.

FILE NAME =

\$FILEL\$

LEGEND

,	$\overline{}$							
(1 ') PORTLAND	CEMENT	CONCRETE	PAVEMENT.	9	1/2"	(JOINTE

2 AGGREGATE SUBGRADE IMPROVEMENT 12"

(3) COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24

4) TOPSOIL FURNISH AND PLACE, 6"

5 PORTLAND CEMENT CONCRETE SIDEWALK, 5"

6 EXISTING BIKE PATH

* (7) COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12

(8) TOPSOIL FURNISH AND PLACE, SPECIAL

9 EXISTING BRICK WALL

(10) EXISTING ORNAMENTAL FENCE

(11) 1 1/2" HMA SURFACE COURSE MIX "C", N50

(12) AGGREGATE SUBGRADE IMPROVEMENT

(13) SEGMENTAL CONCRETE BLOCK WALL

(14) CONCRETE MEDIAN SURFACE, 4 INCH

(15) CORRUGATED MEDIAN

(16) AGGREGATE SUBGRADE IMPROVEMENT 18"

(17) PORTLAND CEMENT CONCRETE BASE COURSE WIDENING 10"

(18) AGGREGATE SUBGRADE IMPROVEMENT 24"

(19) AGGREGATE FILL

(20) 2" HOT-MIX ASPHALT SURFACE COURSE IL-9.5FG N50

(21) AGGREGATE BASE COURSE, TYPE B, 8"

(22) COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.18

23) PIPE UNDERDRAINS 6"

TO STA.

(24) 2" INCIDENTAL HOT-MIX ASPHALT SURFACING

(25) HOT-MIX ASPHALT SURFACE REMOVAL, 2 1/2"

(26) 1" LEVELING BINDER (MACHINE METHOD), N50

NOTE: HMA MIXTURE APPLICATION RATE = 112 LBS/SQ YD/IN

* GUTTER FLAG REVERSE PITCHED TO 2% AWAY FROM MEDIAN

SECTION

(32, 33) R-1

WINNEBAGO 705 37

CONTRACT NO. 64821