


TYPICAL PAVEMENT MARKINGS


ARROW LAYOUT

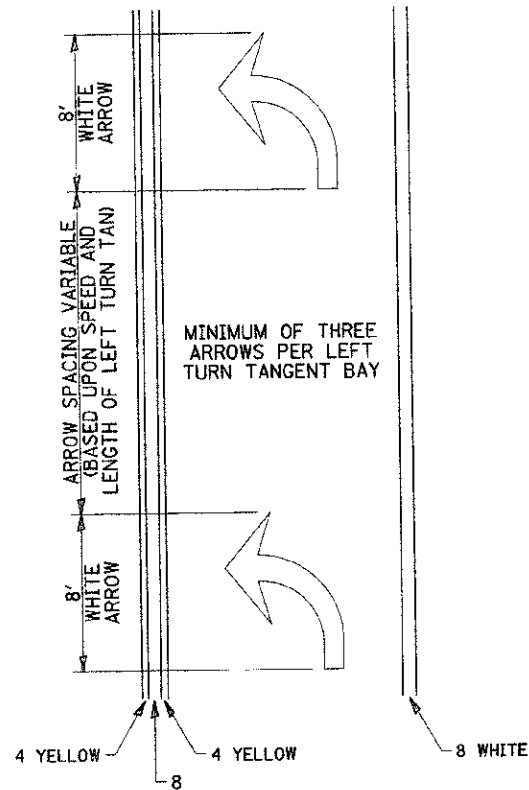

- ◁ ONE-WAY AMBER MARKER
- ◁ ONE-WAY CRYSTAL MARKER
- ◇ TWO-WAY AMBER MARKER

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.


TYPICAL PAVEMENT MARKING FOR FLUSH MEDIAN

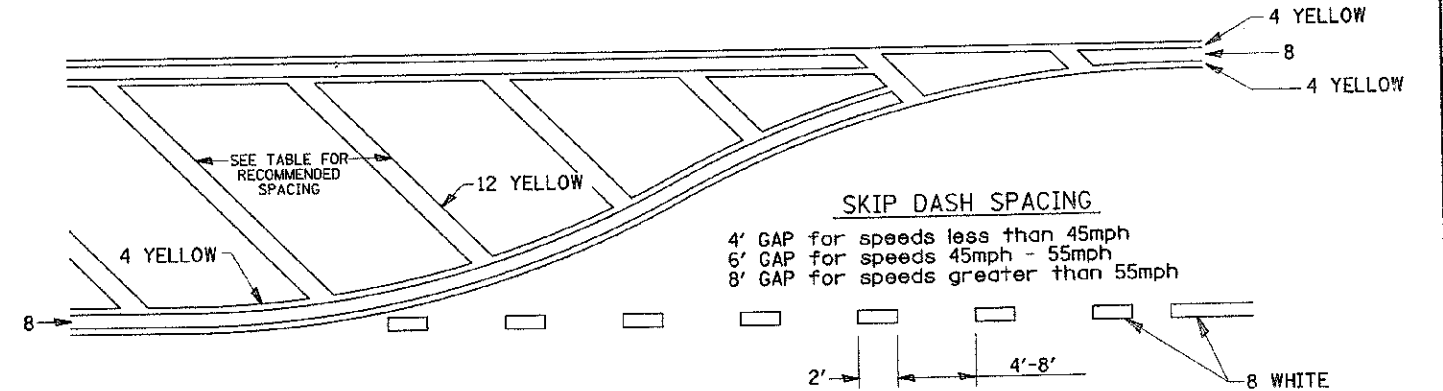

RECOMMENDED SPACING BETWEEN DIAGONALS (IN FEET)

Speed Limit Range	Continuous Median Area	Intersection Channelization	Objects (Islands)
less than 30MPH	50'	15'	10'
30-40MPH	75'	20'	15'
45MPH & over	75'	30'	20'

NOTE: If the spacing recommended in the Table does not permit at least five diagonal lines in the area being marked, the spacing from the next lowest speed range should be used. The recommended spacing is measured parallel to the pavement center line.

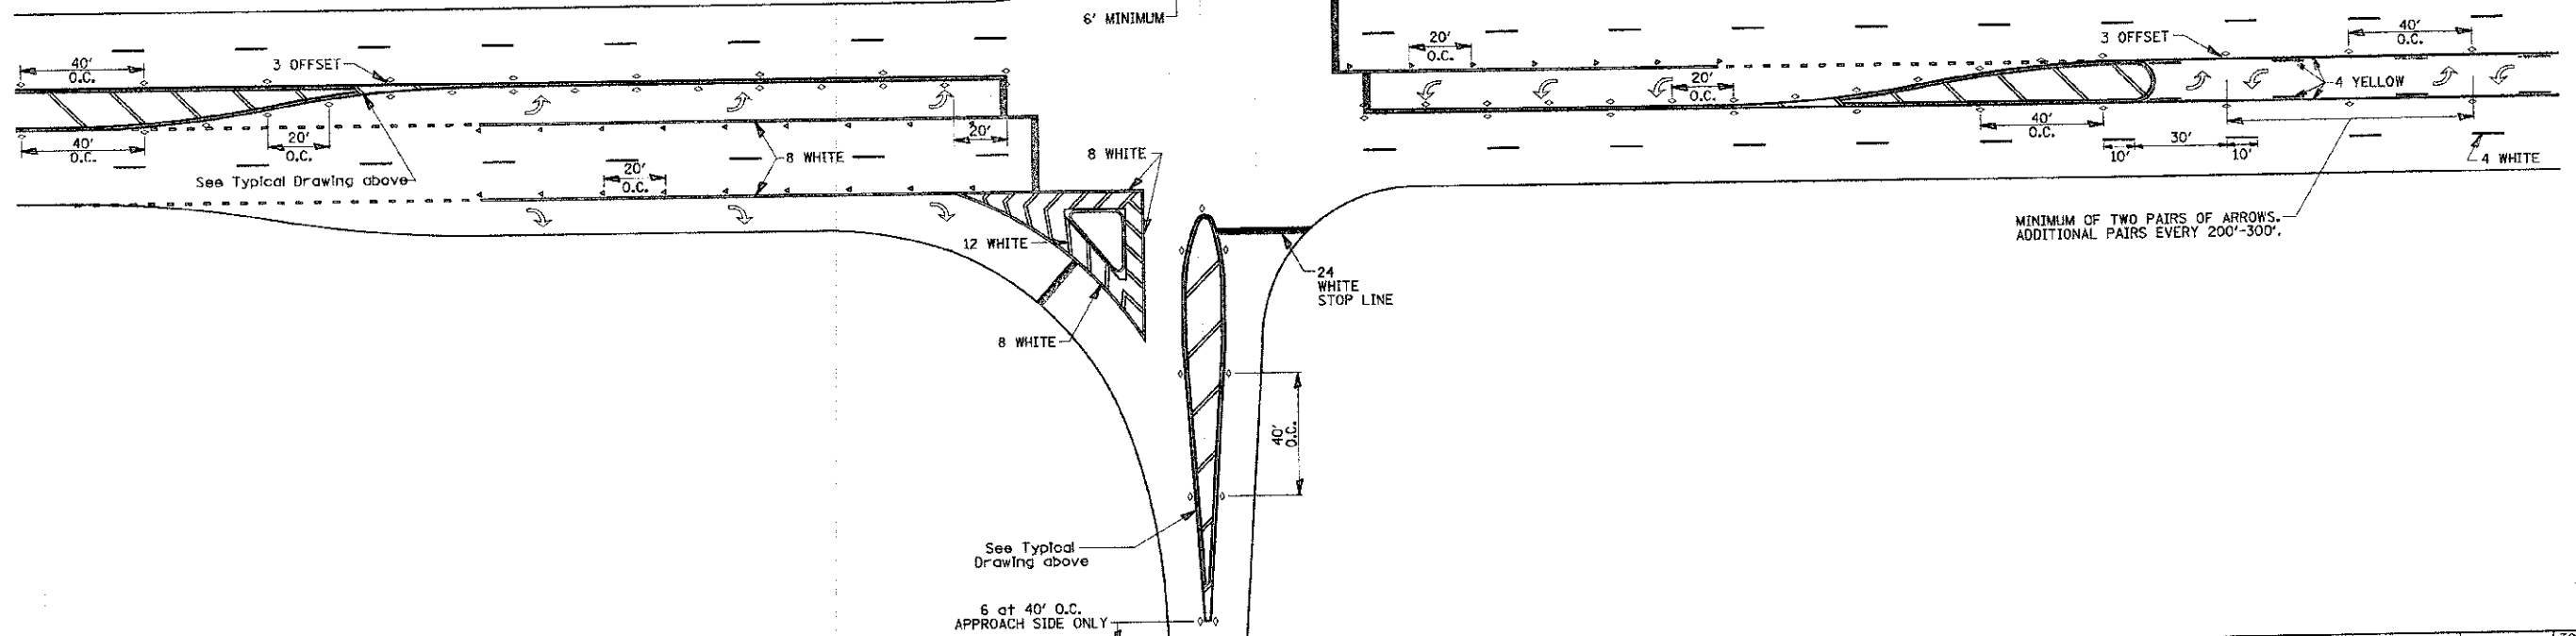

FILE NAME =	USER NAME = tam10g	DESIGNED -	REVISED - 10-10-11	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	REGION 2 / DISTRICT 2 STANDARD	F.A.I. RTE. 9878	SECTION 12-00356-01-BR	COUNTY WINNEBAGO	TOTAL SHEETS 16	SHEET NO. 16A	
PLOT SCALE = 50,000" / 1" =					SCALE: _____ SHEET NO. _____ OF _____ SHEETS STA. _____ TO STA. _____		CONTRACT NO. 85577				
PLOT DATE = 1/16/2013							FED. ROAD DIST. NO. _____ ILLINOIS FED. AID PROJECT				
							TYPICAL PAVEMENT MARKINGS SHEET 2 OF 3				
							41.1				