


PROPOSED LEGEND

- 1 POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX D, N70 2"
- 2 POLYMERIZED HOT-MIX ASPHALT BINDER COURSE, IL-19.6, N70 2.25"
- 3 HOT-MIX ASPHALT BINDER COURSE, IL-19.0, N50 8"
- 5 BITUMINOUS MATERIALS (COVER AND SEAL COATS), A3
- ** 9A SUB-BASE GRANULAR MATERIAL, TYPE A, 12"
- ** 9B LIME MODIFIED SOIL 12"
- 12 AGGREGATE SHOULDERS, TYPE B, 8"
- 13 EARTHEN SHOULDER
- *** 17 CONCRETE CURB & GUTTER, TYPE B-6.24
- 22 4" TOPSOIL PLACEMENT
- * 23 HMA PAVEMENT (FULL DEPTH), 12.25"


LEGEND NOTES:

- * ITEMS 1, 2, & 3 WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD FOR HMA PAVEMENT (FULL-DEPTH), 12.25"
- ** SUB-BASE GRANULAR MATERIAL IS REQUIRED AT:
STA 58+00.00 TO STA 71+02.50 (TR 150)
CONTRACTOR OPTION FOR SUBGRADE IMPROVEMENT METHOD AT ALL OTHER LOCATIONS.
- *** TYPE B-6.24 GUTTER SHALL BE THICKNESS OF PAVEMENT

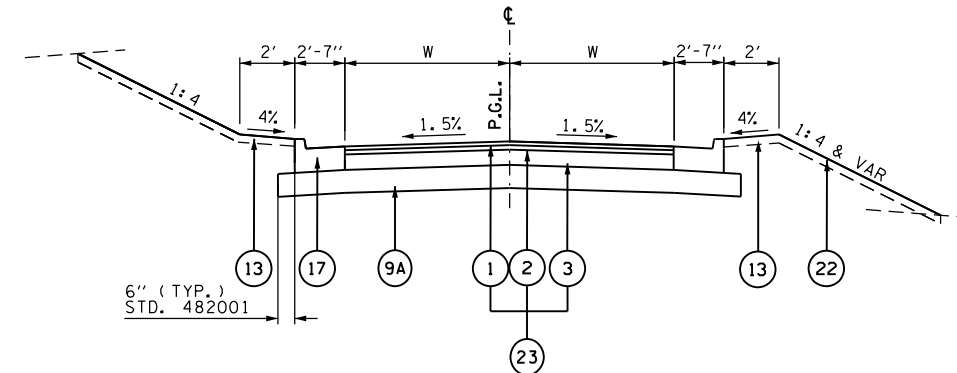


TOWNSHIP ROAD - TANGENT SECTION (HMA) CURB

TR 150 (1700 E) W = 13'
STA 66+50.00 TO STA 66+98.73 LT
STA 66+98.73 TO STA 71+02.50

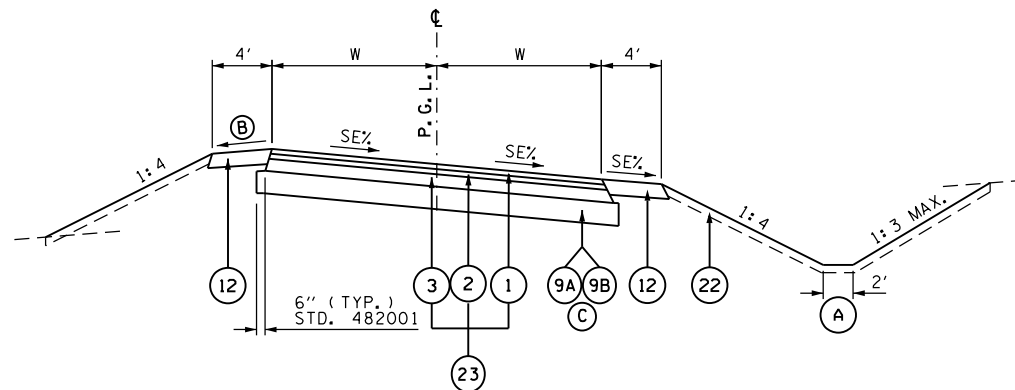

TOWNSHIP ROAD - SUPERELEVATED SECTION (HMA)

BOGUS HOLLOW ROAD (1350 E) W = 12'
STA 5+70.00 TO 8+23.67
TR 150 (1700 E) W = 12'
STA 51+41.52 TO STA 56+90.36

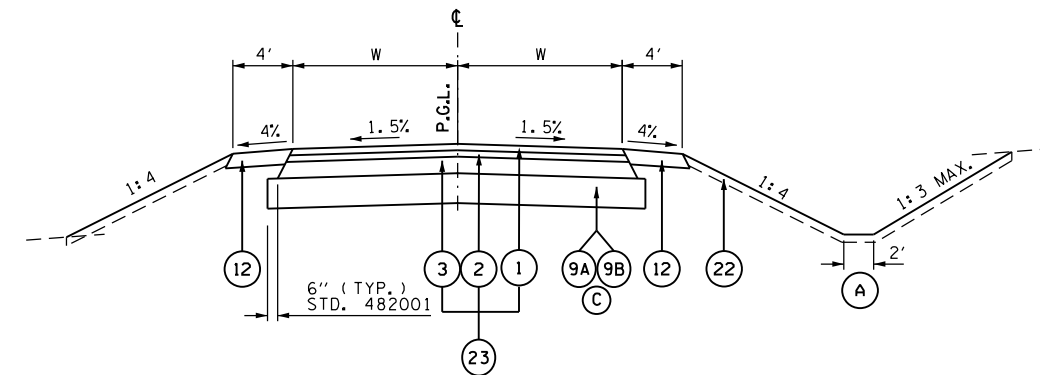

TOWNSHIP ROAD - TANGENT SECTION (HMA)

TR 94 (1400 E) W = 12'
STA 51+29.37 TO STA 54+30.12
TR 150 (1700 E) W = 12'
STA 56+90.36 TO STA 66+50.00
STA 66+50.00 TO STA 66+98.73 RT
TR 178 (1800 E) W = 12'
STA 51+41.52 TO STA 53+75.62

NOTES:

- (A) STANDARD DITCH DEPTH 3.00 FT. BELOW OUTER EDGE OF SHOULDER & VARIES. SEE CROSS SECTIONS
- (B) MAXIMUM SHOULDER ROLLOVER IS 8%
- (C) CONTRACTOR OPTION FOR SUBGRADE IMPROVEMENT METHOD EXCEPT WHERE NOTED.

FILE NAME = D468409-SHT-11-TYP-SIDER01-HMA.dgn	USER NAME = zach1	DESIGNED - DBS	REVISED -
		DRAWN - PSBA	REVISED -
	PLOT SCALE = 100.0000' / 1" =	CHECKED - CSB	REVISED -
	PLOT DATE = 10/16/2012	DATE - 10/2012	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TYPICAL SECTIONS
TOWNSHIP & LOCAL ROADS - HOT-MIX ASPHALT

SCALE: N.A. SHEET NO. 11 OF 18 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
313	7-2 ; 6-1	HENDERSON	976	91
CONTRACT NO. 68409				
ILLINOIS FED. AID PROJECT				