

SPACING / REMARKS TYPE OF MARKING WIDTH OF LINE PATTERN SKIP-DÁSH 3 m (10') LINE WITH 9 m (30') SPACE CENTERLINE ON 2 LANE PAVEMENT 2 @ 100 (4) SOLID 280 (11) C-C CENTERLINE ON MULTI-LANE UNDIVEDED PAVEMENT NO PASSING ZONE LINES: FOR ONE DIRECTION FOR BOTH DIRECTIONS 140 (5½) C-C FROM SKIP-DASH CENTERLINE 280 (11) C-C OMIT SKIP-DASH CENTERLINE BETWEEN YELLOW 2 @ 100 (4) 3 m (10") LINE WITH 9 m (30") SPACE LANE LINES SKIP-DASH SKIP-DASH 100 (4) 125 (5) ON FREEWAYS SAME AS LINE BEING EXTENDED SAME AS LINE BEING EXTENDED 600 (2') LINE WITH 1.8 m (6') SPACE DOTTED LINES (EXTENSIONS OF CENTER, LANE OR TURN LANE MARKINGS) -100 (4) YELLOW LINES (140 (51/2) C-C) OUTLINE MOUNTABLE MEDIANS IN YELLOW; EDGE LINES ARE NOT USED NEXT TO BARRIER CURB 100 (4) SOLID YELLOW-LEFT WHITE-RIGHT 150 (6) LINE; FULL SIZE LETTERS & SYMBOLS (2.4 m (8')) SEE TYPICAL TURN LANE MARKING DETAIL TURN LANE MARKINGS SOLID WHITE 3 m (10') LINE WITH 9 m (30') SPACE FOR SKIP-DASH: 140 (5½) C-C BETWEEN SOLID LINE AND SKIP-DASH LINE TWO WAY LEFT TURN MARKING YELLOW SEE TYPICAL TWO-WAY LEFT TURN MARKING DETAIL IN PAIRS WHITE 2.4 m (8') LEFF ARROW NOT LESS THAN 1.8 m (6') APART 600 (2') APART 600 (2') APART 500 (2') APART SEE TYPICAL CROSSWALK MARKING DETAILS. CROSSWALK LINES (PEDESTRIAN)
A. DIAGONALS (BIKE & EQUESTRIAN)
B. LONGITUDINAL BARS (SCHOOL) 2 **e** 150 (6) 300 (12) **e** 45° 300 (12) **e** 90° SOLID WHITE PLACE 1.2 m (4') IN ADVANCE OF AND
PARALLEL TO CROSSWALK, IF PRESENT.
OTHERWISE, PLACE AT DESIRED STOPPING
POINT. PARALLEL TO CROSSROAD CENTERLINE, WHERE
POSSIBLE WHITE 600 (24) SOLID STOP LINES 280 (11) C-C FOR THE DOUBLE LINE PAINTED MEDIANS 2 @ 100 (4) WITH 300 (12) DIAGONALS YELLOW: TWO WAY TRAFFIC SEE TYPICAL PAINTED MEDIAN MARKING. WHITE: ONE WAY TRAFFIC NO DIAGONALS USED FOR 1,2 m (4') WIDE MEDIANS DIAGONALS: 4.5 m (15°) C-C (LESS THAN 50 km/h (30 MPH)) 6 m (20°) C-C (50 km/h (30 MPH) TO 70 km/h (45 MPH)) 9 m (30°) C-C (0VER 70 km/h (45 MPH)) GORE MARKING AND CHANNELIZING LINES 200 (8) WITH 300 (12) DIAGONALS @ 45° SOLID WHITE 600 (24) TRANSVERSE LINES; "RR" IS 1.8 m (6') LETTERS; 400 (16) LINE FOR "X" SEE STATE STANDARD 780001 AREA OF: "R"=0.33m<sup>2</sup> (3.6 SQ. FT.) EACH "X"=5.0 m<sup>2</sup> (54.0 SQ. FT.) SOLID RAILROAD CROSSING 15 m (50') C-C (LESS THAN 50 km/h (30 MPH)) 25 m (75') C-C (50 km/h (30 MPH) TO 70 km/h (45 MPH)) 45 m (150') C-C (0VER 70 km/h (45 MPH)) SHOULDER DIAGONALS

> FOR FURTHER DETAILS ON PAVEMENT MARKING REFER TO STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION AND STATE STANDARD 780001.


All dimensions are in millimeters (inches) unless otherwise shown.

ILLINOIS DEPARTMENT OF TRANSPORTATION

DISTRICT ONE TYPICAL PAVEMENT MARKINGS

SCALE: NONE

DRAWN BY CADD

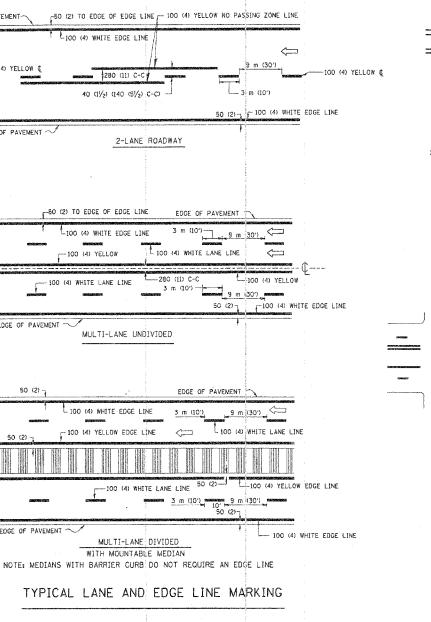

## TYPICAL LANE AND EDGE LINE MARKING

EDGE OF PAVEMENT

 $\Longrightarrow$ 

-100 (4) YELLOW €

FOGE OF PAVEMENT ~

EDGE OF PAVEMENT

EDGE OF PAVEMENT

100 (4) WHITE EDGE LINE

50 (2) TO EDGE OF EDGE LINE


-100 (4) YELLOV

- 100 (4) WHITE LANE LINE

-100 (4) WHITE EDGE LINE

L 100 (4) WHITE EDGE LINE

280 (11) C-C

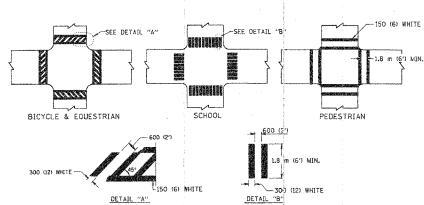

TYPICAL CROSSWALK MARKING

## TYPICAL PAINTED MEDIAN MARKING

MEDIAN WITH TWO-WAY LEFT TURN LANE


MEDIANS OVER 1.2 m (4') WIDE

2-100 (4) YELLOW @ 280 (11) C-C

2 m (6'-4")

A MINIMUM OF TWO PAIRS OF TURN ARROWS SHALL BE USED, WHITE IN COLOR. ADDITIONAL PAIRS SHALL BE PLACED AT 60 m (200') TO 90 m (300') INTERVALS.

100 (4) YELLOW LINES (140 (51/2) C-C)



FULL SIZE LETTERS 2.4 m (8') AND ARROWS SHALL BE USED.  $\P$  AREA = 1.5 m<sup>2</sup> (15.6 SQ. FT.) MIV AREA = 1.9 m<sup>2</sup> (20.8 SQ. FT.)

来 TURN LANES IN EXCESS OF 120 m (400°) IN LENGTH MAY HAVE AN ADDITIONAL SET OF ARROW - "ONLY" INSTALLED MIDWAY BETWEEN THE OTHER TWO SETS OF

TYPICAL LEFT (OR RIGHT) TURN LANE

TYPICAL TURN LANE MARKING