


RAMPS 1-4 (HORSESHOE LAKE RD.)

RAMP 1 STA 3+24 TO STA 21+43
 RAMP 2 STA 1+54 TO STA 14+98

RAMP 3 STA 3+15 TO STA 22+82
 RAMP 4 STA 1+39 TO STA 23+78

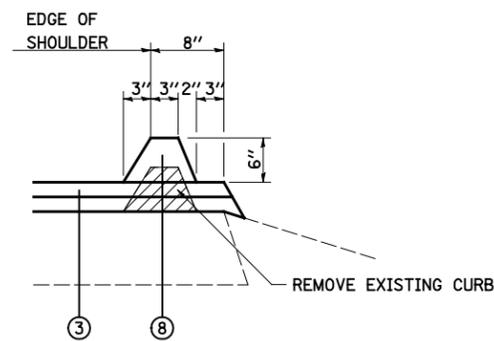

DETAIL A

STA 8+44 TO STA 14+98 (RAMP 2)
 STA 3+15 TO STA 5+98 (RAMP 3)

LEGEND

- ① PROPOSED POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, STONE MATRIX ASPHALT, N80, 2" AND VARIES
- ② PROPOSED POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, STONE MATRIX ASPHALT, N80, 2" (LOWER LIFT)
- ③ PROPOSED HOT-MIX ASPHALT SHOULDERS, 4" AND VARIES
- ④ PROPOSED AGGREGATE WEDGE SHOULDERS, TYPE B, VARIES 4" TO 0"
- ⑤ PROPOSED AGGREGATE SHOULDERS, TYPE B, VARIES 4" TO 0"
- ⑥ PROPOSED BITUMINOUS MATERIALS (PRIME COAT)
- ⑦ PROPOSED AGGREGATE (PRIME COAT)
- ⑧ PROPOSED HOT-MIX ASPHALT SHOULDER CURB
- ⑨ PROPOSED HOT-MIX ASPHALT SHOULDERS, 2" AND VARIES

REMOVAL ITEMS

NOTE: FOR LIMITS OF REMOVAL ITEMS
 SEE REMOVAL SHEETS

FILE NAME =	USER NAME = Paul	DESIGNED - ESW	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PROPOSED TYPICAL SECTIONS FAI ROUTE 255 RAMPS AT FAI ROUTE 5570	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	
#FILEL#		DRAWN - PDB	REVISED -			255	60-(7,8)RS-2	MADISON	261	31	
	PLOT SCALE = 100.0000' / IN.	CHECKED - BRM	REVISED -			CONTRACT NO. 76A89					
	PLOT DATE = 7/31/2012	DATE - 8-29-11	REVISED -			ILLINOIS FED. AID PROJECT					
					SCALE:	SHEET NO. 9 OF 9 SHEETS		STA. TO STA.			