


DETAIL A
BRANCH TO SIGN LIGHTING

1. REMOVE SIGN LIGHTING LUMINAIRE
2. REMOVE CONDUIT(S) AND JUNCTION BOXES ATTACHED TO STRUCTURE
3. REMOVE CABLES AND FUSES BETWEEN LUMINAIRES AND UNIT DUCT AT SIGN STRUCTURE HANDHOLE
4. ABANDON UNIT DUCT BETWEEN SIGN STRUCTURE AND LIGHT POLE ON CONTROLLER.

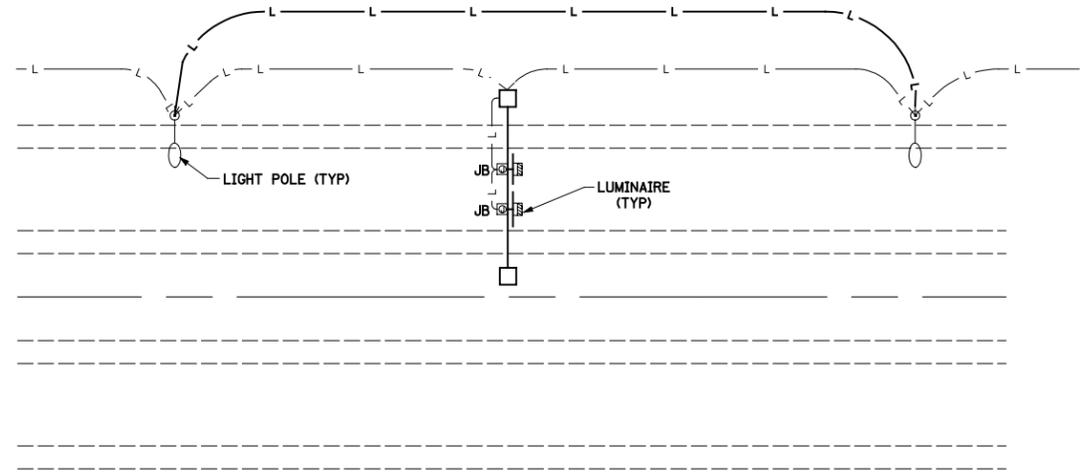

DETAIL B
SIGN STRUCTURE WIRED BETWEEN LIGHT POLE A AND LIGHT POLE B OR CONTROLLER AND LIGHT POLE A

1. SEE "A" ABOVE STEPS 1-4
2. VERIFY RE-ESTABLISHMENT OF CIRCUIT BETWEEN LIGHT POLE A AND LIGHT POLE B OR BETWEEN LIGHT POLE A AND CONTROLLER OR NEW BURIED CABLE BETWEEN LIGHT POLE A AND LIGHT POLE B OR BETWEEN CONTROLLER AND LIGHT POLE A

FILE NAME =	USER NAME = Paul	DESIGNED - JWS	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	FAI 255 MISCELLANEOUS DETAIL		F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
S:\Projects\410-0022-2H1 255 S\ dgn\CADD Sheets\DR16A\9-ahf-miscdetail.dgn	DRAWN - PDB	REVISED -	255				60-(7,8)RS-2	MADISON	261	192	
PLOT SCALE = 40.0000' / IN.	CHECKED - BRM	REVISED -	CONTRACT NO. 76A89								
PLOT DATE = 7/31/2012	DATE - 7-14-11	REVISED -	SCALE:		SHEET NO. 3 OF 6 SHEETS	STA.	TO STA.	FED. ROAD DIST. NO.	ILLINOIS FED. AID PROJECT		