





ALUMINUM COLLAR TO MATCH POLE FINISH. COLLAR TO BE AT LEAST 1" GREATER THAN SLEEVE DIAMETER.

FLAG POLES 1 THROUGH 6 ELEV. = 735.20 POLE NO. 7 ELEV. = 736.30


ALUMINUM FLAG POLE NO. 1 SHALL BE 25' WITH A 6" BUTT AND A 10" DIA. X 30" GROUND SLEEVE. ALUMINUM FLAG POLE NOS. 2 THROUGH 7 SHALL BE 20' WITH A 5" BUTT AND A 8" DIA. X 30" GROUND SLEEVE.

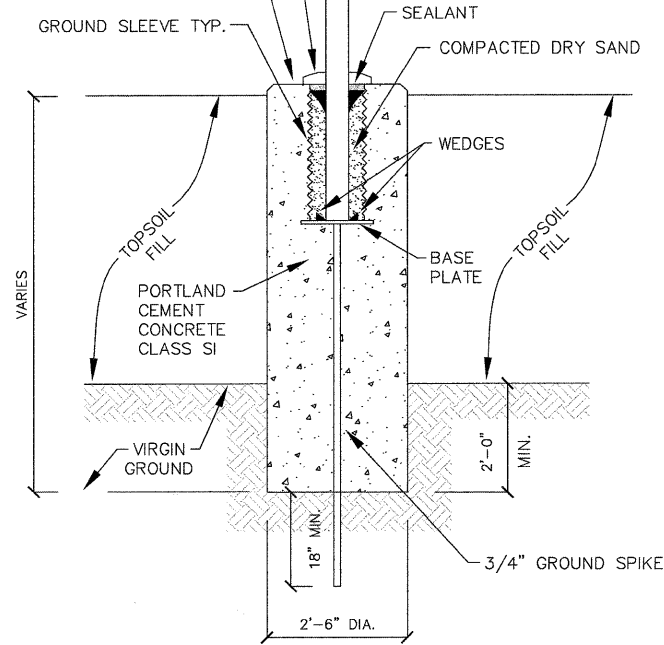


FLAG POLE FOUNDATION DETAIL

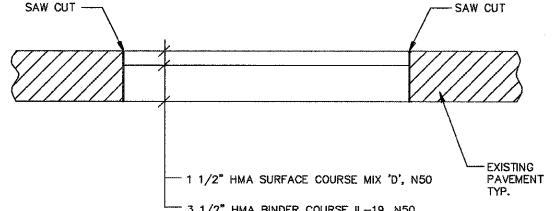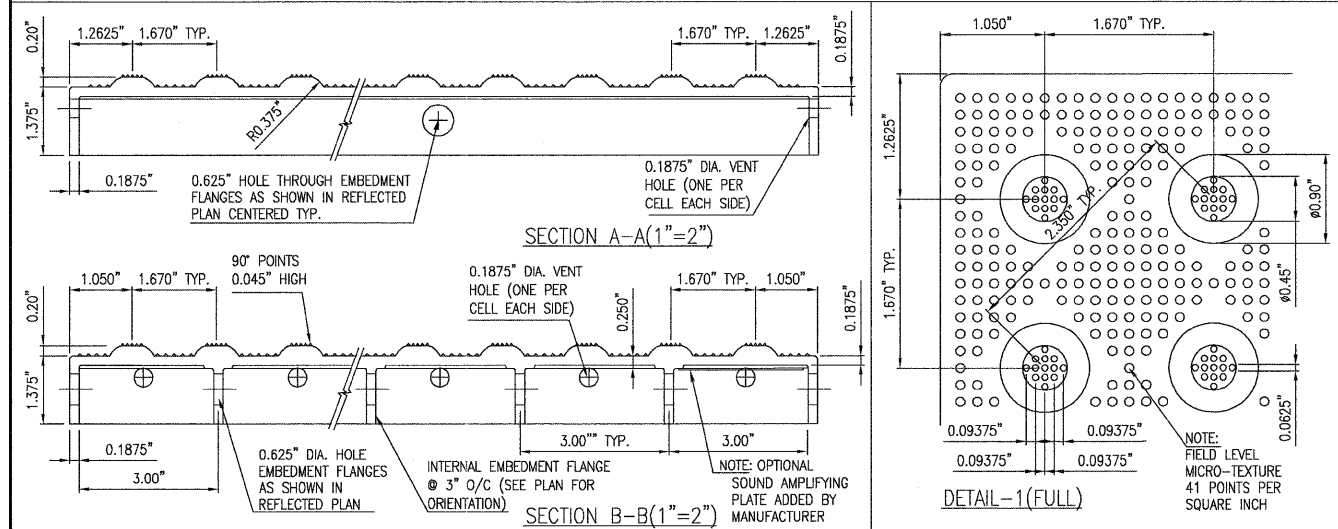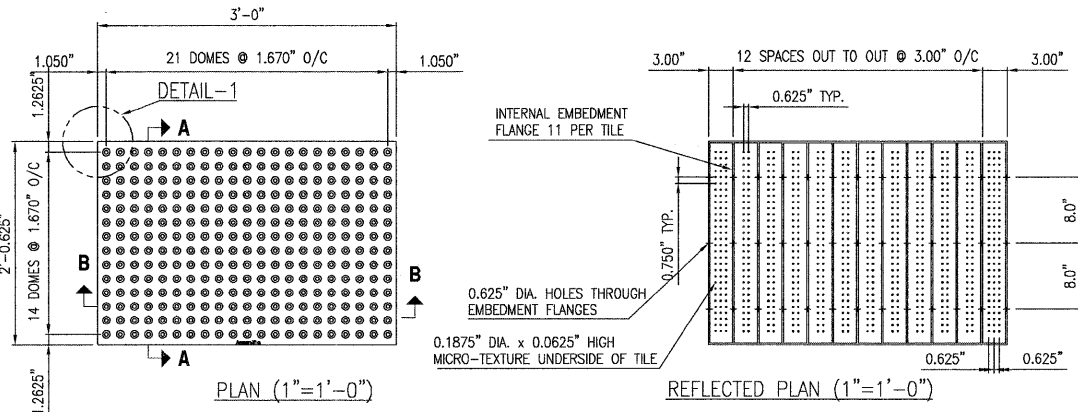

CLASS 'D' PATCHING

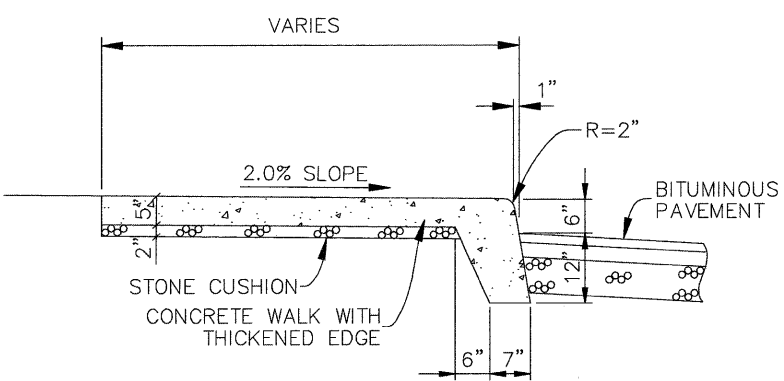

THICKENED EDGE CONCRETE WALK
NO SCALE

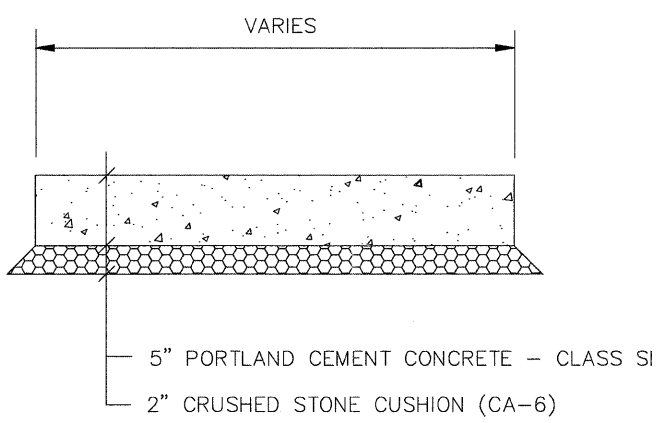

CONCRETE WALK DETAIL

HOT-MIX ASPHALT MIXTURE REQUIREMENTS

MIXTURE TYPE	AIR VOIDS @ Ndes
CLASS D PATCHES	
HMA SURFACE COURSE, MIX "D", N50, 1 1/2" (IL-9.5 mm)	4% @ 50 GYR.
HMA BINDER COURSE, IL-19, N50, 3 1/2"	4% @ 50 GYR.

NOTE:
THE UNIT WEIGHT USED TO CALCULATE ALL HMA SURFACE MIXTURE QUANTITIES IS 112 LBS./SQ.YD./IN.. THE "AC TYPE" FOR NON-POLYMERIZED HMA SHALL BE "PG. 64-22" UNLESS MODIFIED BY DISTRICT ONE SPECIAL PROVISIONS FOR "PERCENT OF RAP" SEE SPECIAL PROVISIONS.