CONTRACT NO. 91326

MHP DRAWN LOS J

VILLAGE OF FORSYTH, ILLINOIS COMMERCE PLACE EXTENSION MISCELLANEOUS DETAILS

TOTAL SHEET NO.

21 17


ILLINOIS PROJECT NCPD-0115 (053


ROUTE NO.


FED. ROAD DIST. NO.

SECTION KOESTER-COMMERCE PL 04-00006-00-RP

FORSYTH

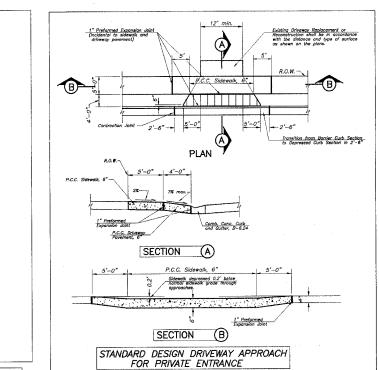

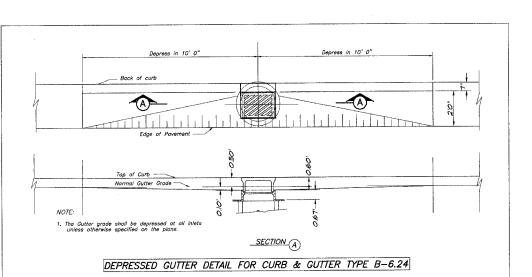

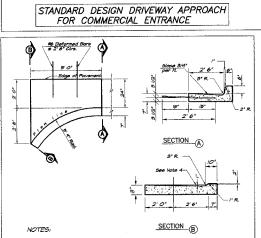

Integral Curb

TYPICAL SECTION

B-6.24 Curb & Gutter

Ramp for handicapped See plans for exact location

PLAN

Slope 1/4"/ft.

Slope Variable

3/4* Premoulded Expansion Joint

PCC_Sidewalk, 8"


I. Class SI' concrete shall be used throughout.


2. At locations where the gutter outlet is adjacent to proposed P.C.C. pavenent the outlet shall be lied to the pavenent with 3/4" old. steel bore spaced at 2-6" cirs, using after a tesped conglutionic Construction joint or the Bulk Head Longitudinal Joint with threaded hooked the bore as shown on IDCT. 364. "Assistance of the Bulk Head Longitudinal Joint with threaded hooked the bore as shown on IDCT. 364." Assistance of the Bulk Head Longitudinal Joint with threaded hooked the bore as shown on IDCT. 364. "Assistance of the Bulk Head Longitudinal Longitu

3. This work shall be paid for at the contract unit price each for "Sutter Outlet" which price shall include the cost of the Longitudinal Construction Joint and Tile Bars, if required. 4. Drop I" from edge of pavement rihen used as an inlet, 6" as an Outlet.

5. A Special Outlet requires 0.45 cv. yds. of Concrete (for information only)

DETAIL - GUTTER OUTLET

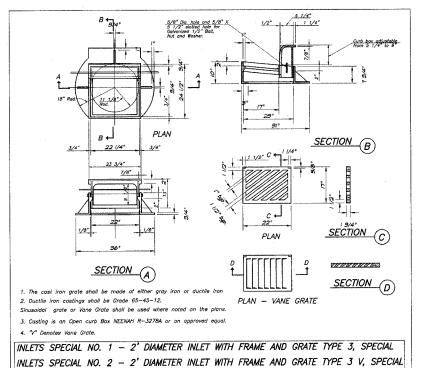

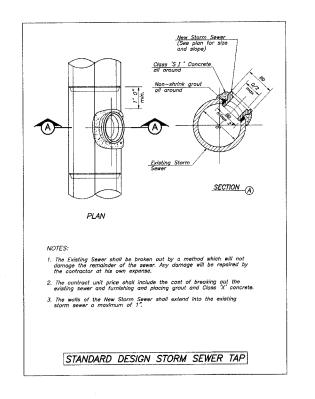

17 21