- THE TOP 6 INCHES OF TOPSOIL SHALL BE STRIPPED FROM ALL DISTURBED AREAS OUTSIDE OF THE EXISTING BRIDGE ABUTMENTS. THIS MATERIAL SHALL BE STOCKPILED AT A LOCATION APPROVED BY THE ENGINEER AND REPLACED AFTER MAJOR GRADING OPERATIONS ARE COMPLETED. THIS WORK SHALL BE PAID FOR AS TOPSOIL EXCAVATION AND PLACEMENT. SEE EARTHWORK QUANTITIES LEGEND, THIS SHEET.
- THE THICKNESS OF BITUMINOUS MIXTURES SHOWN ON THE PLANS IS THE NOMINAL THICKNESS. DEVIATIONS FROM THE NOMINAL THICKNESS WILL BE PERMITTED WHEN SUCH DEVIATIONS OCCUR DUE TO IRREGULARITIES IN THE EXISTING SURFACE OR BASE ON WHICH THE BITUMINOUS MIXTURE IS PLACED.
- 3. AGGREGATE (PRIME COAT): FA 20 MAY BE USED IN ADDITION TO THE GRADATIONS LISTED IN THE 3RD PARAGRAPH OF ARTICLE 1003.03(c) OF THE STANDARD SPECIFICATIONS
- 4. THE ENGINEER WILL BE THE SOLE JUDGE CONCERNING CURING TIME FOR THE VARIOUS BITUMINOUS LIFTS.
- 5. FOR STABILIZATION, ALL TYPE III BARRICADES SHALL REQUIRE A MINIMUM OF FOUR SAND BAGS PER BARRICADE.
- 6. WHERE SECTION OR SUBSECTION MONUMENTS ARE ENCOUNTERED, THE ENGINEER SHALL BE NOTIFIED BEFORE SUCH MONUMENTS ARE REMOVED. THE CONTRACTOR SHALL PROTECT AND CAREFULLY PRESERVE ALL MONUMENTS UNTIL AN AUTHORIZED SURVEYOR OR AGENT HAS WITNESSED OR OTHERWISE REFERENCED THEIR LOCATION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR HAVING AN AUTHORIZED SURVEYOR REESTABLISH ANY SECTION OR SUBSECTION MONUMENTS DESTROYED BY HIS OPERATIONS.
- SEEDING SHALL NOT BE PERMITTED AT ANY TIME WHEN THE GROUND IS FROZEN, WET, OR IN AN UNTILLABLE CONDITION. LOCATIONS TO BE SEEDED WILL BE DETERMINED BY THE ENGINEER.
- 8. ONLY THOSE TREES DESIGNATED BY THE ENGINEER OR LISTED IN THE TREE REMOVAL SCHEDULE SHALL BE REMOVED. THE CONTRACTOR SHALL PROTECT ALL REMAINING TREES FROM DAMAGE DUE TO HIS OPERATIONS.
- 9. ALL ELEVATIONS REFER TO U.S.G.S. MEAN SEA LEVEL DATUM.
- 10. ABANDONED UNDERGROUND UTILITIES THAT CONFLICT WITH CONSTRUCTION SHALL BE DISPOSED OF OUTSIDE THE LIMITS OF THE RIGHT OF WAY ACCORDING TO ARTICLE 202.03 OF THE STANDARD SPECIFICATIONS AND AS DIRECTED BY THE ENGINEER. THIS WORK WILL NOT BE PAID FOR SEPARATELY BUT SHALL BE INCLUDED IN THE COST OF EARTH EXCAVATION.
- 11. ANY REFERENCE TO A STANDARD IN THESE PLANS SHALL BE INTERPRETED TO MEAN THE EDITION AS INDICATED BY THE SUBNUMBER LISTED ON THE INDEX OF SHEETS OR THE COPY OF THE STANDARD INCLUDED IN THESE PLANS.
- 12. THE FOLLOWING RATES OF APPLICATION HAVE BEEN USED IN CALCULATING PLAN QUANTITIES:

GRANULAR MATERIALS 2.05 TONS/CU YD
BITUMINOUS MAT PRIME COAT 0.08 GAL/SQ YD OR 0.375 GAL/SQ YD
BITUMINOUS RESURFACING 112 LBS/SQ YD/IN
TEMPORARY DITCH CHECKS 9 BALES OR 5 TONS AGGREGATE

13. MEMBERS OF JULIE KNOWN TO BE WITHIN THE LIMITS OF THE IMPROVEMENT ARE:

SBC	618	482	6157
COM ED	630	437	2236
COMCAST	630	600	6346
VERIZON NORTH, INC	309	663	3422
KANKAKEE MUNICIPAL UTILITIES	815	933	0445
NICOR GAS	815	754	3339

## LIST OF ILLINOIS DOT HIGHWAY STANDARDS


000001-04	STANDARD SYMBOLS, ABBREVIATIONS & PATTERNS
280001-03	TEMPORARY EROSION CONTROL SYSTEMS
482001-01	BITUMINOUS SHOULDER ADJACENT TO FLEXIBLE PAVEMENT
482011-02	BIT. SHOULDER STRIPS/SHOULDERS WITH RESURFACING OR WIDENING & RESURFACING PROJECTS
542301-0	PRECAST REINFORCED CONCRETE FLARED END SECTION
542401	METAL END SECTIONS FOR PIPE CULVERTS
S 666001	RIGHT-OF-WAY MARKERS
701001-01	OFF-RD OPERATIONS, 2L, 2W, MORE THAN 4.5 m (15') AWAY
701006-02	OFF-RD OPERATIONS, 2L, 2W, 4.5 m (15%) TO 600 mm FROM PAVEMENT EDGE
701011-01	OFF-RD MOVING OPERATIONS, 2L, 2W, DAY ONLY
701201-02	LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEED > 45 MPH
701301-02	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
701306-01	LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATIONS DAY ONLY FOR SPEED > 45 MPH
702001-06	TRAFFIC CONTROL DEVICES
780001-01	TYPICAL PAVEMENT MARKINGS

## COMMITMENTS

TOPSOIL PLACEMENT AREA (SQ FT)

**EARTHWORK QUANTITIES LEGEND** 

NONE.

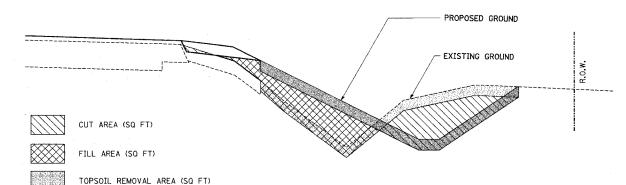

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
REGION 2, DISTRICT THREE

REVIEWED BY:

DISTRICT STUDIES & PLANS ENGINEER

DATE:

EXAMINED BY:

DISTRICT CONSTRUCTION ENGINEER

DISTRICT MATERIALS ENGINEER

DISTRICT OPERATIONS ENGINEER

REVISIONS DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
FAP ROUTE 840 (US 45/52)
SEC 139 BR-2, KANKAKEE COUNTY

GENERAL NOTES, INDEX, AND STANDARDS LIST

SCALE: VERT. HORIZ.

CHECKED BY

CONTRACT NO. 66543
COUNTY TOTAL SHEET NO.

SECTION

840 139-BR2 KANKAKEE 6.9 51

FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT