

60997

	. A.	SECTION		COUNTY	TOTAL SHEETS	SHEET
					800	63/
s	STA. FO STA.					
	ryp. Ro	AD DIST. NO. T	ILLENOMS	PED.	AND PROJECT	

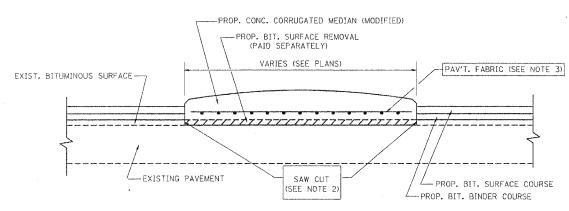

- NOTES: 1. CORRUGATED MEDIAN (MODIFIED) SHALL BE CONSTRUCTED IN ACCORDANCE WITH SECTION 606 OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE PORTIONS OF STATE STANDARD 606306.
 - 2. WITH THE APPROVAL OF THE ENGINEER, THE CONTRACTOR
 MAY DELETE THE SAW CUT IF A NEAT JOINT CAN BE
 OBTAINED BY MILLING THE BIT. SURFACE TO BE REMOVED.
 SAW CUT WILL BE INCLUDED IN THE COST OF CORRUGATED MEDIAN (MODIFIED)
 - 3. PAVEMENT FABRIC WILL BE INCLUDED IN THE COST OF CORRUGATED MEDIAN (MODIFIED)

DETAILS FOR CORRUGATED MEDIAN (MODIFIED)

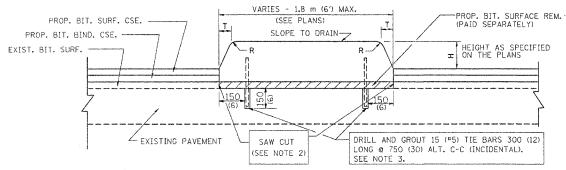

H R T 150 (6) 25 (1) 25 (1) 225 (9) 25 (1) 50 (2) NOTES: 1. CONCRETE MEDIAN TYPE SB (DOWELLED) SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE APPLICABLE PORTIONS OF STATE STANDARD 606301 AND SECTION 606 OF THE STANDARD SPECIFICATIONS.

- 2. WITH THE APPROVAL OF THE ENGINEER, THE CONTRACTOR
 MAY DELETE THE SAW CUT IF A NEAT JOINT CAN BE
 OBTAINED BY MILLING THE BIT. SURFACE TO BE REMOVED.
 SAW CUT WILL BE INCLUDED IN THE COST OF "CONCRETE MEDIAN TYPE SB (DOWELLED)"
- 3. FOR MEDIAN WIDTH LESS THAN 1.2 m (4') USE ONE ROW OF 15 (#5) BARS @ 750 (30) C-C ALONG THE MEDIAN CENTERLINE. TIE BARS WILL BE INCLUDED IN THE COST OF "CONCRETE MEDIAN TYPE SB (DOWELLED)"

DETAILS FOR CONCRETE MEDIAN

TYPE SB (DOWELLED)

BASIS OF PAYMENT: "CONCRETE MEDIAN TYPE SB (DOWELLED)"

MEASUREMENT: m2 (sq. ft.)

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

REVISIONS	
NAME	DATE
	05/14/90
M. DE YONG	06/13/90
M. DE YONG	06/14/90
	06/20/90
M. DE YONG	09/21/90
M. DE YONG	10/12/90
R. SHAH	09/09/94
R. SHAH	10/25/94
E.GOMEZ	08/28/00

ILLINOIS DEPARTMENT OF TRANSPORTATION

DETAILS FOR
CONCRETE MEDIAN TYPE SB (DOWELLED)
CORRUGATED MEDIAN (MODIFIED)

SCALE: NONE

DRAWN BY: JLS CHECKED BY

BD600-02 (BD-5)

02/28/2003 wi\diststd\bd05.dgn VI=BD5

REVISION DATE: 08/28/00