

TYPICAL RAMP WITH FULL WALK
10 FEET WIDE OR LESS

TYPICAL RAMP WITH FULL WALK GREATER THAN 10 FEET WIDE

TYPICAL RAMP ADJACENT TO PARKWAY

62813

RAMP SLOPE


DESIRABLE MAXIMUM 1" PER FOOT ABSOLUTE MAXIMUM 11/2" PER FOOT

* FLARE SLOPE

DESIRABLE MAXIMUM 3" PER FOOT MINIMUM WIDTH OF FLARE 1 FOOT


** 7" SIDE CURB



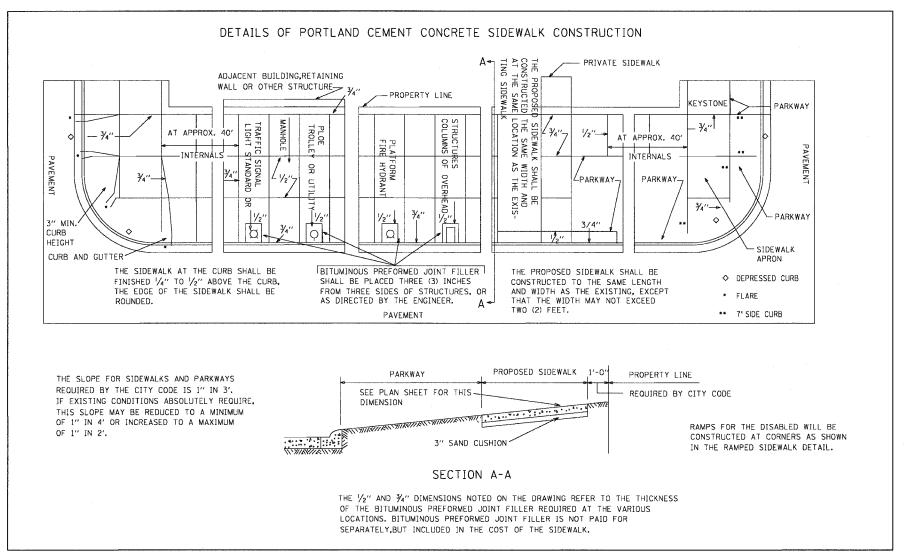



TYPICAL SECTION
AT GUTTER



LEGEND

PARKWAY

PARKWAY

----- PREFORMED JOINT FILLER

---- DUMMY JOINT
---- SLOPE BREAKPOINT

FLARED CURB


** 7" SIDE CURB

♦ DEPRESSED CURB

NOTES:

PREFORMED JOINT FILLER SHALL BE PLACED AS NOTED IN STANDARD DETAILS FOR SIDEWALK CONSTRUCTION.

THIS STANDARD SHOULD BE CONSIDERED TYPICAL FOR MOST LOCATIONS. THERE MAY BE SPECIAL INSTANCES WHERE DESIGN CHANGES WILL BE REQUIRED.

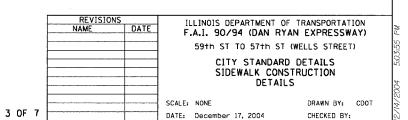

CONSORR TOWNSEND ENVIRONNE ENGINEERS, INC.
303 EAST WACKER DRIVE, SUITE 600
0HCAGO ILLINOIS 60601-5212, PHONE (382) 938-0300