



TYPICAL BUTT JOINT AND BITUMINOUS TAPER

FOR MILLING AND RESURFACING

SECTION COUNTY TOTAL SHEETS 305 0913.1 RS-1 COOK 52 33 TO STA. FED. ROAD DIST. NO. \_ ILLINOIS FED. ATD PROJECT

62850

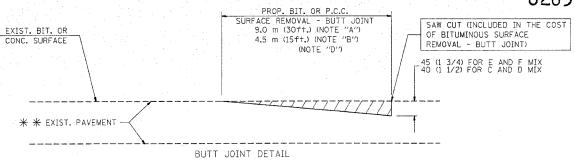

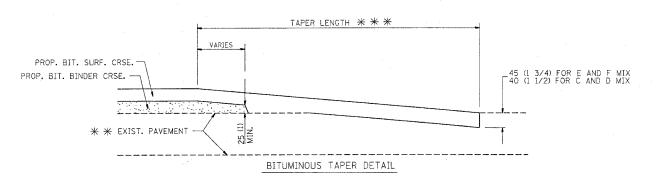

## TYPICAL BUTT JOINT AND BITUMINOUS TAPER FOR RESURFACING ONLY

\* \* PC CONCRETE, BITUMINOUS OR BITUMINOUS RESURFACED PAVEMENT.

## NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.
- C: THE TEMP, RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING BITUMINOUS SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED BITUMINOUS COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 900 (3 ft.) PER INCH OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 1.35 m (4.5') TEMP. BIT. RAMP WILL BE PAID AS "BITUMINOUS SURFACE REMOVAL - BUTT JOINT".
- G: SEE ARTICLE 406.18 AND 406.24 OF THE STANDARD SPECIFICATIONS FOR "BITUMINOUS AND PCC SURFACE REMOVAL, BUTT JOINT".
- \* SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

 $\mbox{\em \#}\mbox{\em \#}\mbox{\em 6.1 m (20')}$  PER 25 (1) RESURFACING (NOTE "A") 3.0 m (10') PER 25 (1) RESURFACING (NOTE "B") ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

ILLINOIS DEPARTMENT OF TRANSPORTATION

BUTT JOINT AND BITUMINOUS TAPER DETAILS

SCALE: NONE

R. SHAH R. SHAH

DRAWN BY

CHECKED BY BD400-05 (VI=BD32)

12/21/2004 W:\diststd\bd32.dgn VI+BD32

REVISION DATE: 04/06/01