

## **PAVEMENT PATCHING FOR BITUMINOUS** SURFACED CONTINUOUSLY REINFORCED PAVEMENT

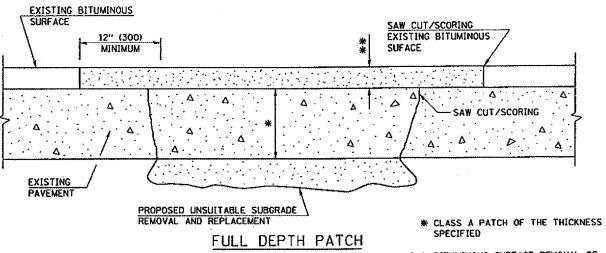

\*\* BITUMINOUS SURFACE REMOVAL OF THE THICKNESS SPECIFIED AND BITUMINOUS MIXTURE FOR PATCHING

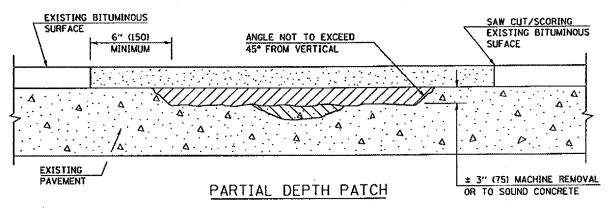

## SEQUENCE OF CONSTRUCTION

- 1. REMOVE THE EXISTING BITUMINOUS SURFACE.
- 2. INSPECT PAVENENT TO DETERMINE IF A FULL OR PARTIAL DEPTH PATCH IS REQUIRED.
- 3. REMOVE AND REPLACE FULL DEPTH OR PARTIAL DEPTH PATCH.
- 4. REPLACE BITUMINOUS SURFACE.



SAW REMOVAL







SPECIAL

PAVEMENT REMOVAL

1. THE WIDTH OF THE FULL DEPTH PATCH OVER A TRENCH SHALL BE 12" (300) WIDER ON EACH SIDE OF THE TRENCH.

GENERAL NOTES

2. THE WORK REQUIRED TO PERFORM A PARTIAL DEPTH PATCH SHALL BE PAID FOR AS SPECIFIED IN THE SPECIAL PROVISION ENTITLED "PAVEMENT PATCHING (PARTIAL DEPTH)".

	NAME	DATE	REVISIONS	
DESIGNED	J.H.M.	1/99	NAME	DATE
CHECKED	J.M.S.	1/99	H.J.H.	04/00
CADD NO.	C-5.02		K.A.G.	06/03

LOOSE MATERIAL BY BY COMPRESSED AIR

ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) UNLESS OTHERWISE SHOWN.

## F.A.I. RTE. SECTION COUNTY SHEETS NO. 72 16 16

CONTRACT NO.70443

• D-5 CONTRACT MAINT. 2005-4
• MACON & PIATT COUNTIES