

SEE SHEET NO. 104
MATCH LINE STA. 279+00

MATCH LINE STA. 285+00
SEE SHEET NO. 106

NORTHWEST
TOLLWAY (I-90)


LEGEND

- EXISTING LIGHT POLE, SIZE AND TYPE AS NOTED
- INSTALL LIGHT POLE, 45' M.H. AND LUMINAIRE, 400W UNLESS OTHERWISE NOTED
- INSTALL LIGHT POLE, 35' M.H. AND LUMINAIRE, 150W
- UNIT DUCT WITH 3-1/C NO. 4 AND 1/C NO. 6 GROUND, 600V (XLP-TYPE USE) 1 1/4" POLYETHYLENE
- UNIT DUCT WITH 5-1/C NO. 4 AND 1/C NO. 6 GROUND, 600V (XLP-TYPE USE) 1 1/2" POLYETHYLENE
- GALVANIZED STEEL CONDUIT, PUSHED, DIAMETER AND LENGTH AS NOTED
- INSTALL LIGHTING CONTROLLER, 100 AMP, 240/480 VOLT
- EXISTING LIGHTING CONTROLLER, 100 AMP, 240/480 VOLT
- INSTALL HANDHOLE
- F INSTALL OFFSET FOUNDATION SEE SHEET 115


NOTE

1. POLES SHOULD BE OFFSET 7.0' FROM EDGE OF PAVEMENT, UNLESS OTHERWISE NOTED
2. SEE STRUCTURAL PLANS FOR BRIDGE DETAILS.
3. THE CONTRACTOR SHALL COORDINATE THE INSTALLATION OF CABLES AND POLES WITH THE BRIDGE CONTRACTOR.
4. THE BRIDGE CONTRACTOR WILL INSTALL THE CONDUIT, ANCHOR BOLTS, AND JUNCTION BOXES REQUIRED IN THE THE PARAPET, WINGWALLS, AND CENTER MEDIAN BARRIER WALL WITHIN THE LIMITS OF THE BRIDGE DECK AND APPROACH SLAB.

UNIT DESIGNATION

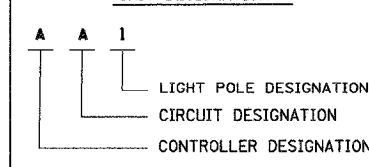

NO UNDERGROUND
SPLICING ALLOWED



SCALE IN FEET

REVISIONS	
NAME	DATE

MEACHAM ROAD

ILLINOIS DEPARTMENT OF TRANSPORTATION
VILLAGE OF SCHAUMBURG
**MEACHAM ROAD
LIGHTING IMPROVEMENTS
POLE INSTALLATION PLAN
STA. 279+00 TO STA. 285+00**

SCALE: 1"=20'
DATE: DECEMBER 2004

DRAWN BY: KDM
CHECKED BY: JMV