## **GENERAL NOTES**

ALL STRUCTURAL STEEL SHALL CONFORM TO AASHTO CLASSIFICATION M-270 GR. 36, UNLESS OTHERWISE NOTED.

PLAN DIMENSIONS AND DETAILS RELATIVE TO EXISTING STRUCTURE HAVE BEEN TAKEN FROM EXISTING PLANS AND ARE SUBJECT TO NOMINAL CONSTRUCTION VARIATIONS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY SUCH DIMENSIONS AND DETAILS IN THE FIELD AND MAKE NECESSARY APPROVED ADJUSTMENTS PRIOR TO CONSTRUCTION OR ORDERING OF MATERIALS. SUCH VARIATIONS SHALL NOT BE CAUSE FOR ADDITIONAL COMPENSATION FOR A CHANGE IN THE SCOPE OF THE WORK, HOWER, THE CONTRACTOR WILL BE PAID FOR THE QUANTITY ACTUALLY FURNISHED AT THE UNIT PRICE BID FOR THE WORK.

THE EXISTING STRUCTURAL STEEL COATING CONTAINS LEAD. THE CONTRACTOR SHOULD TAKE APPROPRIATE PRECAUTIONS TO DEAL WITH THE PRESENCE OF LEAD ON THIS PROJECT.


EXISTING STRUCTURAL STEEL SHALL ONLY BE CLEANED AND PAINTED AS REQUIRE BY THE SPECIAL PROVISION "CLEANING AND PAINTING CONTACT SURFACE AREAS OF EXISTING STEEL STRUCTURES".

ALL STRUCTURAL STEEL SHALL BE SHOP PAINTED WITH THE INORGANIC ZINC RICH PRIMER PER AASHTO M 300, TYPE 1. COST INCLUDED WITH FURNISHING AND ERECTING STRUCTURAL STEEL.

AREAS OF DECK REPAIRS SHOWN ARE ESTIMATED. THE ENGINEER SHALL SHOW ACTUAL LOCATIONS OF DECK REPAIRS ON AS-BUILT PLANS.

## TOTAL BILL OF MATERIALS

ITEM	UNIT	QUANTITY
BITUMINOUS CONCRETE REMOVAL (DECK)	SQ. YD.	1,014
ELASTOMERIC BEARING ASSEMBLY, TYPE I	EACH	12
ELASTOMERIC BEARING ASSEMBLY, TYPE II	EACH	12
FURNISHING AND ERECTING STRUCTURAL STEEL	POUND	4,130
JACK AND REMOVE EXISTING BEARING	EACH	24
SILICONE JOINT SEALER	FOOT	231.5
POLYMER CONCRETE	CU. FT.	15
BRIDGE DECK MICROSILICA CONCRETE OVERLAY	SQ. YD.	1,014
BRIDGE DECK HYDRO-SCARIFICATION	SQ. YD.	1,014
BRIDGE DECK GROOVING	SQ. YD.	1,014
DECK SLAB REPAIR (FULL DEPTH, TYPE I)	SQ. YD.	2
DECK SLAB REPAIR (FULL DEPTH, TYPE II)	SQ. YD.	42

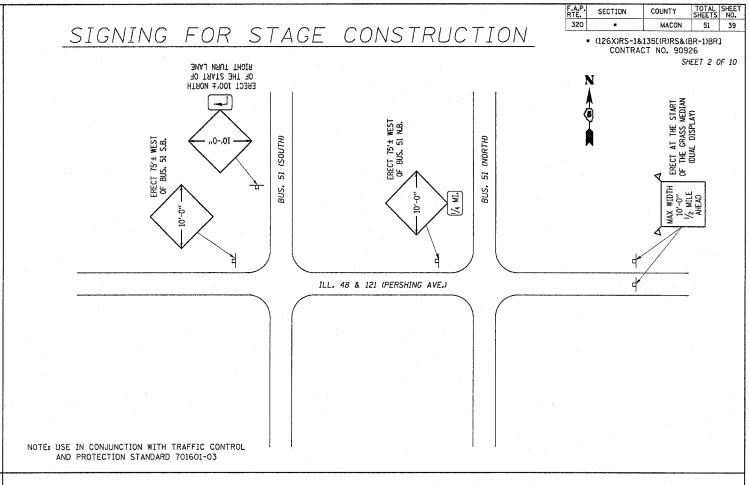

## SIGNING FOR STAGE CONSTRUCTION

