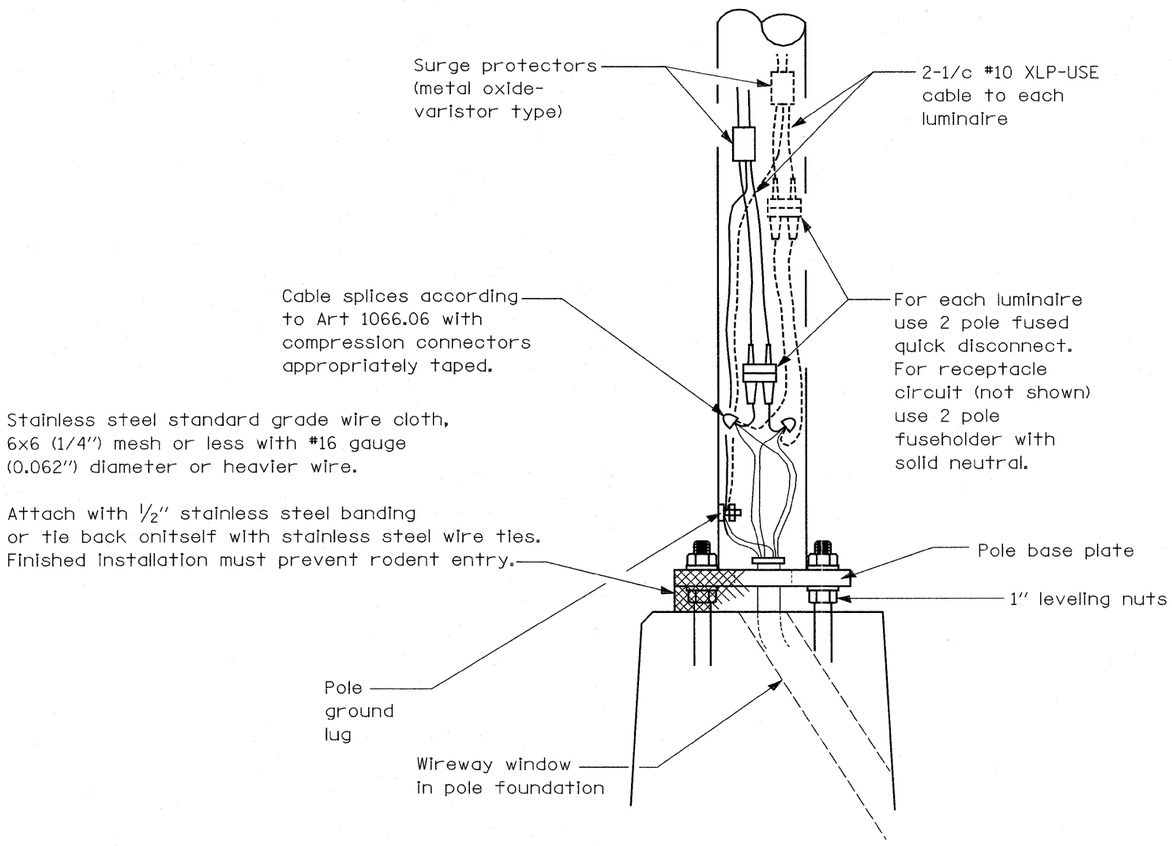

WIRING DETAIL

NO SCALE

GENERAL NOTES

All taped splices shall use 2 layers of electrical tape over 3 layers of rubber tape as required by the Standard Specifications. Coat the finished taped splice with bonding compound.

All cable splices shall be taped unless another method has been specifically approved by the Engineer.

For example purposes the pole is shown on an anchor base. If the pole is required to be set on a breakaway base, consult the Standard Specifications.

FILE NAME = S:\Projects\403-00072_57-70\dgn\ML_Keller\lighting detail.dgn	USER NAME = paul	DESIGNED - VG	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	POLE HANDHOLE WIRING, FAI ROUTE 57/70			F.A.I RTE.	SECTION	COUNTY	TOTAL SHEETS / SHEET NO.
		DRAWN - PDB	REVISED -					57/70	(25-3,4)R	EFFINGHAM	1098 / 321
	PLOT SCALE = 40.0000 ' / IN.	CHECKED - BRM	REVISED -							CONTRACT NO. 74299	
	PLOT DATE = 3/18/2011	DATE - 8-5-10	REVISED -		SCALE:	SHEET NO. 23 OF 34 SHEETS	STA. TO STA.	FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT	