


80' (24 m) 0,C.

MULTI-LANE/UNDIVIDED

SEE NOTE A-

 \Rightarrow

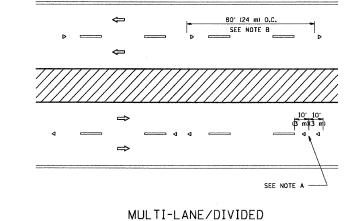

 \Rightarrow

 \Rightarrow



3 o 40' (12 m) O.C. __ ←

LANE REDUCTION TRANSITION

- MARKERS USED WITH DASHED LINES SHALL BE CENTERED IN THE GAP BETWEEN SEGMENTS.
- 2. MARKERS USED ADJACENT TO SOLID LINES SHALL BE OFFSET 2 TO 3 (50 TO 75) TOWARD TRAFFIC AS SHOWN.
- MARKERS THROUGH TANGENTS LESS THAN 500' (150 m) IN LENGTH BETWEEN CURVES SHALL BE INSTALLED AT THE LESSER OF THE TWO CURVE SPACINGS.

LANE MARKER NOTES

- B. REDUCE TO 40' (12 m) O.C. ON CURVES WHERE ADVISORY SPEEDS ARE 10 M.P.H (20 km/h) LOWER THAN POSTED SPEEDS.
- A. USE DOUBLE LANE LINE MARKERS SPACED AS SHOWN.

SYMBOLS

YELLOW STRIPE

1 5

SEE NOTE A-

TWO-WAY LEFT TURN


40' (12 m) O.C.

- WHITE STRIPE
- ONE-WAY AMBER MARKER
- TWO-WAY AMBER MARKER

ONE-WAY CRYSTAL MARKER (W/O)

DESIGN NOTES

- 1. DOUBLE LANE LINE MARKERS SHALL BE USED UNLESS SPECIFIED OTHERWISE.
- 2. EXCEPT AS SHOWN ON THE LANE REDUCTION TRANSITION AND FREEWAY EXIT RAMP DETAIL, MARKERS ARE NOT TO BE SPECIFIED ON RIGHT EDGE LINES.
- 3. THE EXACT WARKER LIMITS, SPACING, AND COLOR SHOULD BE INCLUDED IN THE PLANS.
- 4. MARKERS SHOULD NOT BE USED ALONGSIDE CURBS EXCEPT FOR EXTREMELY SHORT SECTIONS OF CURBS WHERE NOT MORE THAN TWO MARKERS WOULD BE INVOLVED.

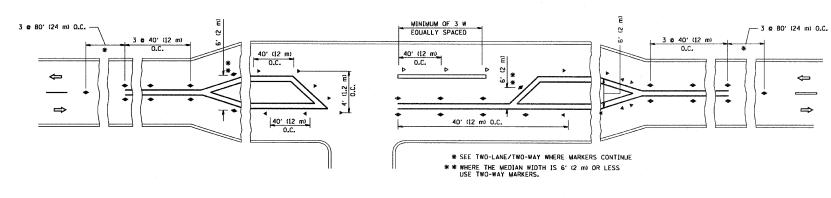

LEFT TURN

All dimensions are in inches (millimeters) unless otherwise shown.

FILE NAME =		USER NAME = gaglianobt	DESIGNED -	REVISED - T. RAMMACHER OF	-19-94	TYPICAL APPLICATIONS	F.A.U. SECTION	COUNTY TOTAL SHEET
W:\diststd\22x	x34\toll.dgn		DRAWN -	REVISED - T. RAMMACHER O	STATE OF ILLINOIS		2612 3104 B-1-I-2	COOK 80 78
		PLOT SCALE = 50.000 '/ IN.	CHECKED -	REVISED -T. RAMMACHER OF	06-00 DEPARTMENT OF TRANSPORTATION	RAISED REFLECTIVE PAVEMENT MARKERS (SNOW-PLOW RESISTANT)	TC-11	CONTRACT NO. 60D76
		PLOT DATE = 1/4/2008	DATE -	REVISED -		SCALE: NONE SHEET NO. 1 OF 1 SHEETS STA. TO STA.		AID PROJECT