

DELINEATOR AND POST ORIENTATION

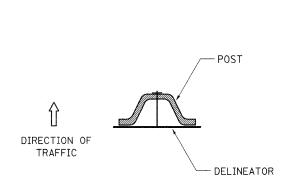


DELINEATORS SHALL BE INSTALLED ACCORDING TO STANDARD 635001 EXCEPT THAT THE POST SHALL BE ROTATED 180°. THE POST WILL HAVE THE WIDE SIDE FACING TRAFFIC AND THE DELINEATOR ATTACHECD AS SHOWN ABOVE.

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

REVISED - 11-01-07

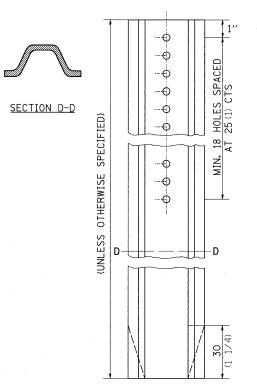

ROAD CLOSED TO OVERSIZED LOADS

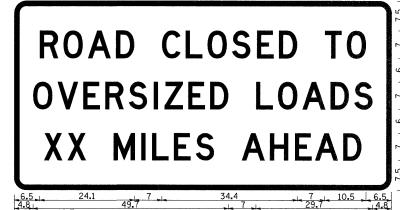

Permit Loads - Loads Over 13 Feet; 3.0" Radius, 1.3" Border, Black on Orange; [ROAD CLOSED TO] D; [OVERSIZED LOADS] D; [XX MILES AHEAD] D;

R 6.5	0 12.5	A 18.7	D 25.9	C 37.6	L 43.6	0 49.2	\$ 55.4	E 61.8	D 67.3	T 79.0	0 84.6		
0 4.8	V 11.0	E 17.6	R 23.1	\$ 29.2	1 35.5	Z 38.2	E 44.3	D 49.8	L 61.5	0 67.1	A 73.3	D 80.5	\$ 86.5
X 7.6	X 13.6	M 25.3	32.3	L 35.1	E 40.6	\$ 46.2	A 57.9	H 65.1	E 71.4	A 76.6	D 83.7		

All work to furnish and install these signs shall be included in the cost of the Traffic Control Standards and shall not be paid for separately.

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

REVISED - 1-9-08


DELINEATOR AND POST ORIENTATION

37.4

ROAD CLOSED TO OVERSIZED LOADS

40.4

SUBGRADE REPLACEMENT

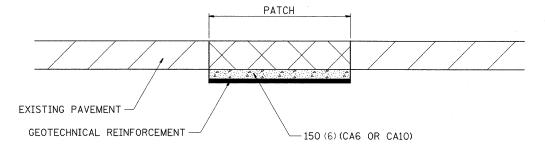

NOTES:

THE CA 6 OR CA 10 SHALL BE COMPACTED IN A MANNER APPROVED BY THE ENGINEER. IF THE MOISTURE CONTENT OF THE MATERIAL IS SUCH THAT COMPACTION SATISFACTORY TO THE ENGINEER CANNOT BE OBTAINED, SUFFICIENT WATER SHALL BE ADDED SO THAT SATISFACTORY COMPACTION CAN BE OBTAINED.

THE CA 6 OR CA 10 WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER CU YD FOR GRANULAR SUBGRADE REPLACEMENT

THE GEOTECHNICAL REINFORCEMENT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQ YD FOR GEOTECHNICAL REINFORCEMENT

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

REVISED - 1-09-08